

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Drawer DD  
Artesia, NM 88210

5. LEASE  
LC-063545  
6. IF INDIAN, ALLOTTEE OR TRIBE NAME

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen a well, plug back to a different reservoir, Use Form 9-331-C for such proposals.)

1. oil well ☐ gas well ☒ other

2. NAME OF OPERATOR

PERRY R. BASS

3. ADDRESS OF OPERATOR

P.O. BOX 2760, MIDLAND, TX 79702

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)

AT SURFACE: 1980' FSL. 660' FSL. UNDESIGNED

AT TOP PROD. INTERVAL:

AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

SUBSEQUENT REPORT OF:

TEST WATER SHUT OFF ☐

FRACTURE TREAT ☐

SHOOT OR ACIDIZE ☐

REPAIR WELL ☐

PULL OR ALTER CASING ☐

MULTIPLE COMPLETE ☐

CHANGE ZONES ☐

ABANDON\* ☐

(other) SPUD DATE, SURFACE CSG, 878 CSG.

7. UNIT AGREEMENT NAME

616 EDDY UNIT

8. FARM OR LEASE NAME

616 EDDY UNIT

9. WELL NO.

92

10. FIELD OR WILDCAT NAME

and Indian Field Morrow

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

SEC. 14, T. 21S, R. 28E

12. COUNTY OR PARISH

EDDY

13. STATE

NEW MEXICO

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)

3279' GL

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

SPUD 14 3/4" HOLE, 9:00 AM CST 5-3-82.

DRILG. 14 3/4" HOLE TO 800'. RAN 18 JTS. 1 3/4" 42\* H-40 STEEL CSG.

SET @ 800'. CEMENTED W/ 450 SX FACESETTER LITE W/ADDITIVES

TAILED W/ 300 SX CLASS 'C' W/ADDITIVES. DIL NOT RAMP PLUG.

SD @ 4:15 PM MDT NOTIFIED USGS DID NOT WITNESS. 5-4-82.

CIRC. 2 1/2 SX TO SURFACE. WOC. 13 3/4 HRS TEST CSG. & HYDRIL TO

1000 PSI. HELD OK. DCLG. 2 1/2 SX TO 2700' GUIDE SHOE COMMENCED.

DRLE. 11" HOLE 5-5-82. DRLE. 11" HOLE TO 2700' RAN 61 JTS. 8 7/8"

28\* 5-80 STEEL CSG. CEMENTED W/ 2500 SX FACESETTER LITE W/ADDITIVES

TAILED W/ 200 SX CLASS 'C' W/ADDITIVES. RAMPED PLUG TO 1800 PSI OVER

Subsurface Safety Valve: Manu. and Type

18. I hereby certify that the foregoing is true and correct

SIGNED K.C. Huntchens


TITLE S. Production Clerk

(This space for Federal or State office use)

APPROVED BY

CONDITIONS OF APPROVAL, IF ANY

TITLE

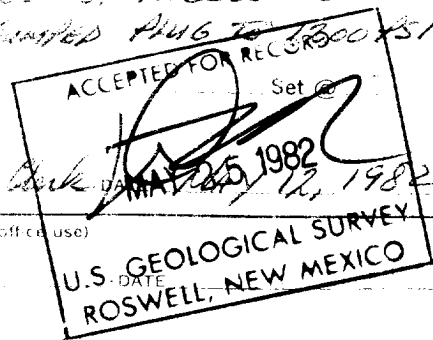

## Instructions

**General:** This form is designed for submitting proposals to perform certain well operations, and reports of such operations when completed, as indicated, on Federal and Indian lands pursuant to applicable Federal law and regulations, and, if approved or accepted by any State, on all lands in such State, pursuant to applicable State law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from, the local Federal and/or State office.

**Item 4:** If there are no applicable State requirements, locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local State or Federal office for specific instructions.

**Item 17:** Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by local Federal and/or State offices. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones, or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to top of any left in the hole; method of closing top of well; and date well site conditioned for final inspection looking to approval of the abandonment.

12:30 PM WDT 5-9-82 CIRC 300 SX TO SURFACE: WITNESSED BY PETE HEINZ  
WOC 20 HAS. TEST CSG. & BOP TO 2000 PSI OK. DRLG. FLUAT. CEMENT, & SHOE,  
TEST CSG. SEAT 600 PSI OK. COMMENCED DRLG. 7/8" HOLE 5-10-82.