
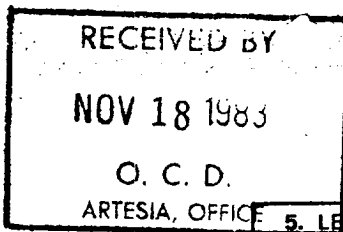


Form 9-331
Dec. 1973

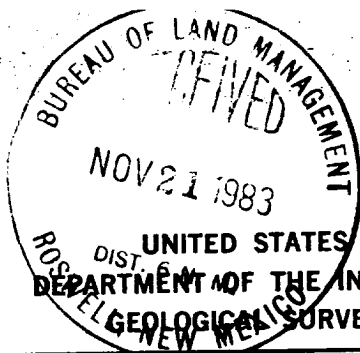

NEW MEXICO OIL CORP. COMMISSION
Drawer DD
Artesia, NM 88210

Form Approved.
Budget Bureau No. 42-R1424

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ gas ☒ other ☐
well well

2. NAME OF OPERATOR

TXO Production Corp.

3. ADDRESS OF OPERATOR

900 Wilco Bldg., Midland, TX 79701

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)

AT SURFACE: 900' FSL & 1980' FWL

AT TOP PROD. INTERVAL: of sec 17

AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) ☐

SUBSEQUENT REPORT OF:

☐
☐
☒
☐
☐
☐
☐
☐
☐

RECEIVED BY

MAY 9 1984

O. C. D.

ARTESIA, OFFICE

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

10-6-83 WOCU. 10-12-83 set 23/8" N-80 tbg @ 11,200. 10-16-83 Est. to @ 9600' PBTD @ 11,745. RN cased hole logs. 10-18-83 RN CCL & Gammaray f/11,743' to 11,500'. 10-19-83 perf w/3 1/8 csg gun f/11,660'-670'. ISPF, 10 holes. Set pkr in 15 pts tension @ 11,630'. 10-20-83 Snd line broke pads out. So f/unit repair. 10-21-83 Relsd pkr. Set retainer @ 11,506'. Pressure annul to 2000 #. pbtd 11,506'. 10-22-83 tag cmt @ 11,505'. 10-23-83 PBTD 11,743. Drld cmt to 11,675. Test 4 1/2 csg to 1500#. 10-25-83 perf w/3 1/8" csg gun f/11,692-712 ISF, 20 holes GIH w/4 1/2" pkr, 1-7/8" profile nipple & 370 jts 2 3/8" N-80 tbg. Set pkr @ 11,603. 10-26-83 testing. 10-27-83 tested. PBTD @ 11,588". Set pkr @ 11,200' w/14,000# compr Perf w/1 9/16" gun f/11,475-500 42 holes CIBP & Set @ 11,603 w/15' cement. 10-30-83 turn to production. 10-31-83 SI, WOPL.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Janna Caudle ACCEPTED FOR RECORD TITLE Engineering Asst. DATE 11/17/83

(This space for Federal or State office use)

APPROVED BY Janna Caudle TITLE Engineering Asst. DATE 11/17/83
CONDITIONS OF APPROVAL, IF ANY:

ROSWELL, NEW MEXICO

*See Instructions on Reverse Side