


YATES PETROLEUM CORPORATION ✓

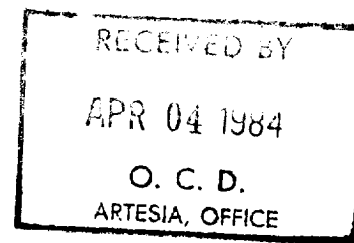

DRILL STEM TESTS

Slinkard "UR" Federal #2 NM-15881  
Unit F, Sec. 11-T20S-R29E  
Eddy County, New Mexico

DST #1 9720-9987': (Tested surface equipment with 1000#.)  
Tool opened w/30" free flow GTS in 20 minutes. Max pressure  
28# on 3/8" choke = est 146 mcf. Shut in 60". Tool opened  
60" for final flow - gas stabilized 28# on 3/8" choke = 146  
mcf. Shut in 180". RECOVERY: 330' of condensate and 93'  
of drilling fluid. SAMPLER: 2100#; 10.52 cfg, 900 cc con-  
densate. PRESSURES: IHP 5022#; IFP 138-228#; ISIP 4000#;  
FFP 297-388#; FSIP 3822#; FHP 5022#. BHT: 154°