

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

N.M. Oil Cons IV-Dist. 2
1301 W. Grand Avenue
Artesia, NM 88210

FORM APPROVED
OMB NO. 1004-0135
Expires: November 30, 2000

c/sf

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

OKY USA WTP Limited Partnership

3a. Address

P.O. Box 50250, Midland, TX 79710-0250

3b. Phone No.

915-685-5717

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

2030 FSL 860 FWL NWSW(L) Sec 4 T20S R28E

Lease Serial No.

NM33580

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.

Aquila Federal 1

9. API Well No.

30-015-26430

10. Field and Pool, or Exploratory Area

Old Millman Ranch

Bone Springs

11. County or Parish, State

Eddy NM

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

☒ Notice of Intent

☐ Subsequent Report

☐ Final Abandonment Notice

TYPE OF ACTION

☐ Acidize

☐ Alter Casing

☐ Casing Repair

☐ Change Plans

☐ Convert to Injection

☐ Deepen

☐ Fracture Treat

☐ New Construction

☒ Plug and Abandon

☐ Plug Back

☐ Production (Start/Resume)

☐ Reclamation

☐ Recomplete

☐ Temporarily Abandon

☐ Water Disposal

☐ Water Shut-Off

☐ Well Integrity

☐ Other

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleation in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the final site is ready for final inspection.)

TD-6390' PBID-6065' PERFS-6140-6249' CIBP-6100'

CASING: 13-3/8" 48# @ 300', 17-1/2", cmt w/350sx, TOC-Circ
8-5/8" 24# @ 767', 12-1/4", cmt w/700sx, TOC-Circ
5-1/2" 15.5# @ 6390', 7-7/8", cmt w/250sx, TOC-Circ
DV Tool @ 6007' cmt w/ 750sx, TOC-Circ

1. M&P 25sx cmt @ 6057-5957' TAG
2. M&P 25sx cmt @ 4411-4311'
3. M&P 25sx cmt @ 2912-2812' TAG
4. M&P 25sx cmt @ 817-717'
5. M&P 25sx cmt @ 350-250'
6. M&P 10sx cmt Surface Plug

10# MLF BETWEEN PLUGS

APPROVAL SUBJECT TO
GENERAL REQUIREMENTS AND
SPECIAL STIPULATIONS ATTACHED

14. I hereby certify that the foregoing is true and correct
Name (Printed/Typed)

David Stewart

Title

Sr. Regulatory Analyst

Date

6/21/02

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

(ORIG. SGN.) ALEXIS C. SWOBODA

Title

PETROLEUM ENGINEER

Date

JUN 24 2002

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title 18 U.S.C. Section 1001, and Title 43 U.S.C. Section 1212, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

OXY USA WTP LP
AQUILA FEDERAL #1
SEC 4 T20S R28E EDDY NM

0.0 - 75.0' CEMENT PLUG 10sx

250.0 - 350.0' CEMENT PLUG 25sx

717.0 - 817.0' CEMENT PLUG 25sx


2812.0 - 2912.0' CEMENT PLUG 25sx

4311.0 - 4411.0' CEMENT PLUG 25sx

5957.0 - 6057.0' CEMENT PLUG 25sx

6065.0 - 6100.0' CEMENT PLUG 5sx

6100.0 - 6100.0' CIBP 3/92

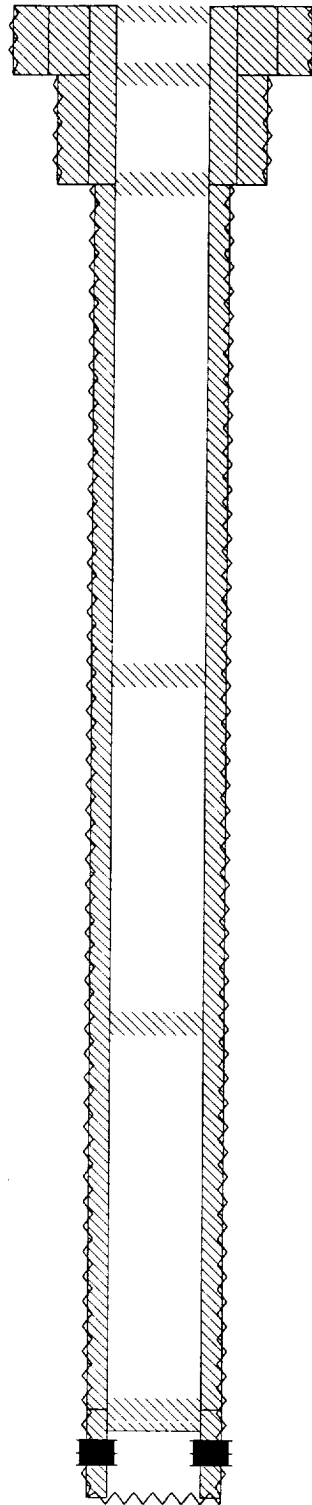

TD: 6390'

0.0 - 300.0' 17-1/2" OD HOLE

0.0 - 300.0' CEMENT 350sx-CIRC

0.0 - 300.0' 13-3/8" OD SURF CSG

300.0 - 767.0' 12-1/4" OD HOLE

0.0 - 767.0' CEMENT 700sx-CIRC

0.0 - 767.0' 8-5/8" OD INT CSG

767.0 - 6390.0' 7-7/8" OD HOLE

0.0 - 6007.0' CEMENT 750sx-CIRC

6007.0 - 6007.0' DVT00L

6007.0 - 6390.0' CEMENT 250sx-CIRC

0.0 - 6390.0' 5-1/2" OD PROD CSG

6140.0 - 6249.0' ABANDONED PERFS

REMOVED