


DEVON ENERGY CORPORATION WELLBORE SCHEMATIC

WELL NAME: WISER STATE #3				FIELD: CATCLAW DRAW, EAST (DELAWARE)		
LOCATION: 2257' FNL & 862' FWL, SEC. 9-T21S-R26E				COUNTY: EDDY		STATE: NM
ELEVATION: GL=3223' KB=3232'				SPUD DATE: 04/30/91		COMP DATE: 05/22/91
API#: 30-015-26725		PREPARED BY: C.H. CARLETON			DATE: 08/26/02	
TUBULARS	DEPTH	SIZE	WEIGHT	GRADE	THREAD	HOLE SIZE
CASING:	0' - 330'	13 3/8"	48#			17 1/2"
CASING:	0' - 2150'	8 5/8"	24#			12 1/4"
CASING:	0' - 4170'	5 1/2"	15.5#,17#	J-55	LT&C	7 7/8"
TUBING:						
TUBING:						

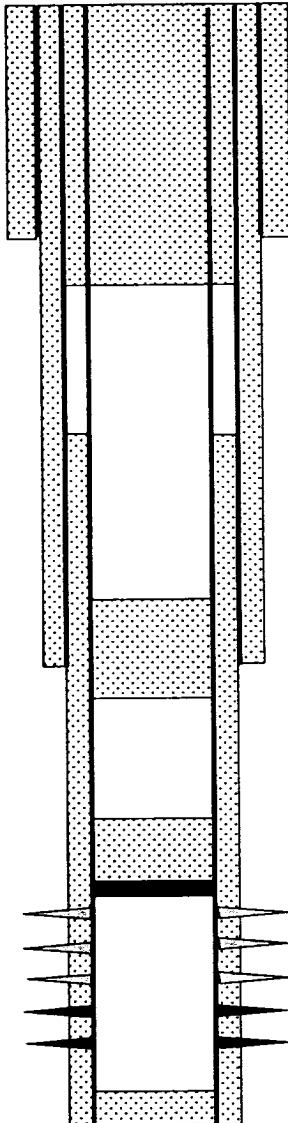

☒ CURRENT

☐ PROPOSED

OPERATOR: DEVON ENERGY PRODUCTION COMPANY, L.P.

CEMENT PLUG: 0' - 400' WITH 150 SXS CEMENT
13 3/8" CASING @ 330' W/450 SXS. TOC @ SURFACE.

PERFORATE 5 1/2" CASING(4 SHOTS) @ 400'

NOTE: 9.5PPG MUD SPOTTED BETWEEN CEMENT PLUGS.

CEMENT PLUG: 1945' - 2225' WITH 25 SXS CEMENT
8 5/8" CASING @ 2150' W/890 SXS. TOC @ SURFACE.

CIBP @ 2775', CAPPED WITH 25 SXS CEMENT
PERFORATIONS: 2818' - 2838'(OA) - 21 HOLES (SQZ'D OFF)
PERFORATIONS: 2945' - 2960'(OA) - 16 HOLES (SQZ'D OFF)
PERF & SQUEEZE 3020', 3025', & 3030' W/100 SXS
PERFORATIONS: 3092' - 3105'(OA) - 14 HOLES
PERFORATIONS: 4073' - 4087'(OA) - 29 HOLES
PBTD @ 4100'
5 1/2" CASING @ 4170' W/560 SXS. TOC @ 1,420'(CBL).
TD @ 4175'