

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

YATES PETROLEUM CORPORATION (505) 748-1471

3. Address and Telephone No.

105 South 4th St., Artesia, NM 88210

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

Unit K, 1980' FSL & 2310' FWL, Sec. 21-T21S-R28E

FORM APPROVED

Budget Bureau No. 1004-0135

Expires: March 31, 1993

5. Lease Designation and Serial No.
NM 0486

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Garretson AMI Federal #1

9. API Well No.

30-015-27284

10. Field and Pool, or Exploratory Area

Fenton Delaware

11. County or Parish, State

Eddy, NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

☐ Notice of Intent

☒ Subsequent Report

☐ Final Abandonment Notice

TYPE OF ACTION

☐ Abandonment

☐ Recompletion

☐ Plugging Back

☐ Casing Repair

☐ Altering Casing

☒ Other Set Surface Casing

☐ Change of Plans

☐ New Construction

☐ Non-Routine Fracturing

☐ Water Shut-Off


☐ Conversion to Injection

☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Spudded 26" hole 1:00 PM L-21-93. Set 40' of 20" conductor, redi-mix to surface. Notified BLM, Carlsbad, NM, of spud. Resumed drilling 17-1/2" hole 6:45 PM 1-25-93. Ran 18 joints 13-3/8" 54.5# J-55 casing set 833'. Guide shoe set 833'. Float collar set 791'. Cemented w/ 650 sx PSL "C" + 1/4#/sx Celloseal (yield 1.84, wt 12.7). Tailed in w/250 sx "C" + 2% CaCl2 (yield 1.32, wt 14.8). PD 8:53 AM 1-28-93. Bumped plug to 550 psi, float held okay. Circulated 230 sacks cement. WOC. Drilled out 9:15 AM 1-29-93. WOC 24 hrs and 20 mins. NU and tested to 500 psi for 15 minutes. OK. Reduced hole to 12-1/4" and resumed drilling.

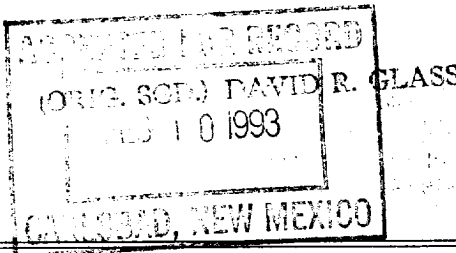

14. I hereby certify that the foregoing is true and correct

Signed David R. Glass

Title Production Supervisor

Date 2-3-93

(This space for Federal or State office use)

Approved by _____

Conditions of approval, if any:

Title _____

Date _____