

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

NM OIL CONS. COMMISSION
Drawer DD
Artesia, NM 88210

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

YATES PETROLEUM CORPORATION

3. Address and Telephone No.

105 South 4th St., Artesia, NM 88210

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

Unit H, 2310' FNL, 660' FEL, Sec. 20-T22S-R24E

5. Lease Designation and Serial No.

NM 54840

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

Bandana Federal Unit

8. Well Name and No.

Bandana Federal Unit #1

9. API Well No.

30-015-27313

10. Field and Pool, or Exploratory Area

Wildcat Morrow

11. County or Parish, State

Eddy Co., NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION


- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other Spud well

- ☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☒ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Spudded 26" hole 5:30 PM 2-22-93. Set 40' of 20" conductor pipe. Notified BLM, Carlsbad, NM of spud time. Resumed drilling 17-1/2" hole 11:00 AM 2-24-93. Ran 8 joints 13-3/8" 54.5# J-55 casing set 333'. Guide shoe set 333', insert float set 290'. Cemented w/400 sx Class "C" Neat + 2% CaCl₂ (yield 1.32, wt 14.8). PD 7:45 PM 2-25-93. Bumped plug to 650psi, float held OK. Circulated 110 sacks. WOC. Drilled out 7:45 PM 2-26-93. WOC 24 hours. Reduced hole to 12-1/4" and resumed drilling.

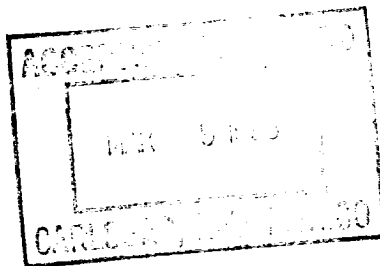

RECEIVED
MAR 10 1993
CARLSBAD, NM

14. I hereby certify that the foregoing is true and correct

Signed

Title Production Supervisor

Date 3-2-93

(This space for Federal or State office use)

Approved by

Title

Date

Conditions of approval, if any: