

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

Oil Cons.
N.M. DIV-Dist. 2
1301 W. Grand Avenue
Artesia, NM 88210

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator
Devon Energy Production Co., L P

3a. Address
20 N. Broadway, Suite 1500, Okla City, OK 73102

3b. Phone No. (include area code)
(405) 552-4528

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

SHL: 2,300' FSL & 1,800' FEL of Section 17-T21S-R26E Unit
BHL: 749' FNL & 1,514' FEL of Section 17-T21S-R26E Unit B

6. If Indian, Allottee or Tribe Name
NA

7. If Unit or CA/Agreement, Name and/or No.
NA

8. Well Name and No.
Inexco "17" Federal #2

9. API Well No.
30-015-27804

10. Field and Pool, or Exploratory Area
Catchlaw Draw (Morrow) Field

11. County or Parish, State
Eddy County,
New Mexico

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/ Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input checked="" type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	


13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Devon Proposes To Permanitly Plug And Abandon As Follows:

1. Set CIBP at 10,500' and cap CIBP with 35' of cement.
2. Circulate wellbore full of 9.5 ppg mud.
3. Spot balanced cement plug 6,000'- 6,100'.
4. Spot balanced cement plug 4,350'- 4,450'. WOC. Tag plug.
5. Spot balanced cement plug 2,060'- 2,160' (intermediate casing shoe at 2,113'). WOC. Tag plug.
6. Spot balanced cement plug 440'- 540' (surface casing shoe at 491'). WOC. Tag plug.
7. Spot cement plug 0'- 50'.
8. Cut off 13 3/8", 8 5/8" and 4 1/2" casing 3' below ground level and install dry hole marker.
9. Restore location.

Note: Cement to be Class "C" at 14.8ppg with a yield of 1.32 cu ft/sx.

SEE ATTACHED FOR
CONDITIONS OF APPROVAL

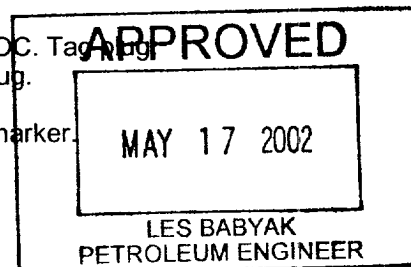

14. I hereby certify that the foregoing is true and correct
Name (Printed/Typed)

Charles H. Carleton

Signature

Title

Senior Engineering Technician

Date

05/10/2002

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

RECEIVED


2002 MAY 14 AM 9:12

BUREAU OF LAND MGMT.
ROSWELL OFFICE



DEVON ENERGY CORPORATION WELLBORE SCHEMATIC

WELL NAME: INEXCO "17" FEDERAL #2				FIELD: CATCLAW DRAW (MORROW)		
LOCATION: 2300' FSL & 1800' FEL, SEC 17-T21S-R26E				COUNTY: EDDY		STATE: NM
ELEVATION: GL=3280'; KB=3299'				SPUD DATE: 02/02/94		COMP DATE: 08/19/94
API#: 30-015-27804		PREPARED BY: C.H. CARLETON			DATE: 05/09/02	
	DEPTH	SIZE	WEIGHT	GRADE	THREAD	HOLE SIZE
CASING:	0' - 491'	13 3/8"	48#	J-55	ST&C	17 1/2"
CASING:	0' - 2113'	8 5/8"	24#	K-55	ST&C	12 1/4"
CASING:	0' - 11368'	4 1/2"	11.6#,13.5#	N-80	LT&C	7 7/8"
TUBING:						
TUBING:						

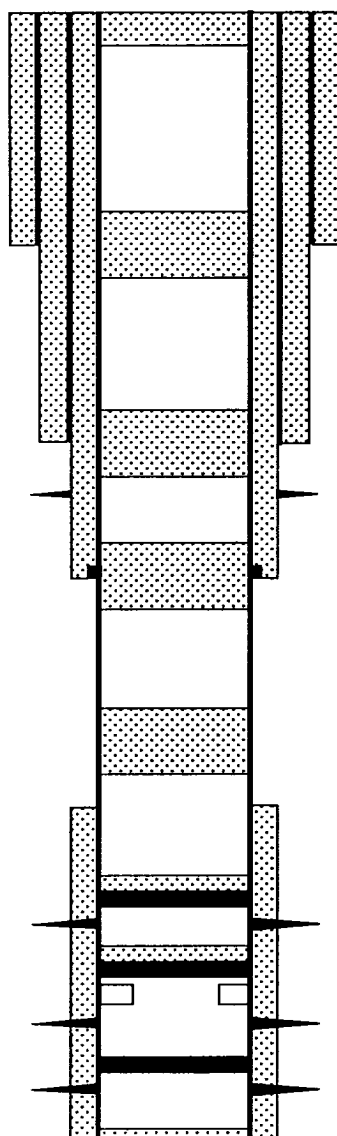

☐ CURRENT

☒ PROPOSED

OPERATOR: DEVON ENERGY PRODUCTION COMPANY, L.P.

CEMENT PLUG: 0'- 50'

CEMENT PLUG: 440'- 540'

13 3/8" CASING @ 491' W/1017 SXS. TOC @ SURFACE

NOTE: 9.5ppg MUD TO BE SPOTTED BETWEEN CEMENT PLUGS.

CEMENT PLUG: 2060'- 2160'

8 5/8" CASING @ 2113' W/2050 SXS. TOC @ SURFACE

PERF & SQUEEZE @ 3532' W/910 SXS. TOC @ SURFACE.

CEMENT PLUG: 4350'- 4450'

DV TOOL @ 4396' W/950 SXS. TOC @ 3538' (CBL)

CEMENT PLUG: 6000'- 6100'

CIBP @ 10500' & CAPPED WITH 35' CEMENT

MORROW PERFORATIONS: 10532'- 10578'(OA) - 20 HOLES

CIBP @ 10800' & CAPPED WITH 35' CEMENT

ARROW SEAL PERMANENT PACKER @ 10911'

MORROW PERFORATIONS: 11040'- 11240'(OA) - 86 HOLES

CIBP @ 11300'

MORROW PERFORATIONS: 11310'- 11321'(OA) - 12 HOLES


4 1/2" CASING @ 11368' W/790 SXS. TOC @ 8097' (CBL)

TD @ 11368'

NOTE: FOR CALCULATED CEMENT TOPS A YIELD OF 1.32 CU FT/SX AND 50% FILLUP WERE ASSUMED.

DEVON ENERGY CORPORATION WELLBORE SCHEMATIC

WELL NAME: INEXCO "17" FEDERAL #2				FIELD: CATCLAW DRAW (MORROW)		
LOCATION: 2300' FSL & 1800' FEL, SEC 17-T21S-R26E				COUNTY: EDDY		STATE: NM
ELEVATION: GL=3280'; KB=3299'				SPUD DATE: 02/02/94		COMP DATE: 08/19/94
API#: 30-015-27804		PREPARED BY: C.H. CARLETON			DATE: 05/08/02	
	DEPTH	SIZE	WEIGHT	GRADE	THREAD	HOLE SIZE
CASING:	0' - 491'	13 3/8"	48#	J-55	ST&C	17 1/2"
CASING:	0' - 2113'	8 5/8"	24#	K-55	ST&C	12 1/4"
CASING:	0' - 11368'	4 1/2"	11.6#,13.5#	N-80	LT&C	7 7/8"
TUBING:	0' - 10338'	2 3/8"	4.7#	N-80	AB Mod	
TUBING:						

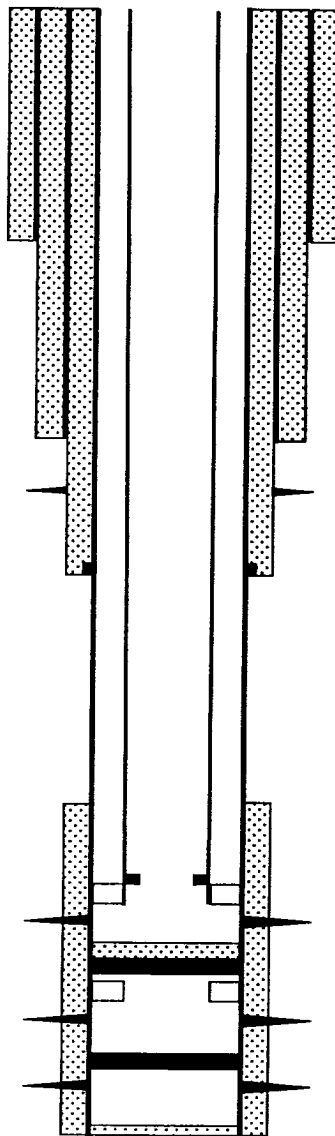

CURRENT



PROPOSED

OPERATOR: DEVON ENERGY PRODUCTION COMPANY, L.P.

13 3/8" CASING @ 491' W/1017 SXS. TOC @ SURFACE

8 5/8" CASING @ 2113' W/2050 SXS. TOC @ SURFACE

PERF & SQUEEZE @ 3532' W/910 SXS. TOC @ SURFACE.

DV TOOL @ 4396' W/950 SXS. TOC @ 3538' (CBL)

ON/OFF TOOL @ 10337'

MODEL "A-3" LOK SET PACKER @ 10338'

MORROW PERFORATIONS: 10532'- 10578'(OA) - 20 HOLES

CIBP @ 10800' & CAPPED WITH 35' CEMENT

ARROW SEAL PERMANENT PACKER @ 10911'

MORROW PERFORATIONS: 11040'- 11240'(OA) - 86 HOLES

CIBP @ 11300'

MORROW PERFORATIONS: 11310'- 11321'(OA) - 12 HOLES

4 1/2" CASING @ 11368' W/790 SXS. TOC @ 8097' (CBL)

TD @ 11368'

NOTE: FOR CALCULATED CEMENT TOPS A YIELD OF 1.32 CU FT/SX AND 50% FILLUP WERE ASSUMED.