

YATES PETROLEUM CORPORATION
Walt Canyon AMA Federal #3
Section 3-T22S-R24E
Eddy County, New Mexico

SUNDRY NOTICE CONTINUED:

TO:

14-3/4" hole with 9-5/8" 36# J-55 LT&C casing set at 1600'

8-3/4" hole with 7" 26# casing set at 10400' as follows:

7" 26# L-80 LT&C set from 0-1300'

7" 26# J-55 LT&C set from 1300-7000'

7" 26# N-80 LT&C set from 7000-9300'

7" 26# S-95 LT&C set from 9300-10400'

A 3000 psi BOP system will be nipped up and tested on the 9-5/8" casing.

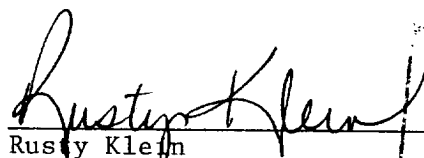
CEMENT PROGRAM:

9-5/8" 36# casing will be cemented with 900 sacks Lite (yield 2.0, weight 12.0) and tailed in with 300 sacks Class C with 2% CaCl₂ (yield 1.32, weight 14.8).

7" 26# casing will be a 2-stage cement job as follows: DV tool set at 6000'

Stage 1: 500 sacks Super C Modified (yield 1.67, weight 13.0)

Stage 2: 600 sacks Lite (yield 2.0, weight 12.0). Cement will be circulated


Rusty Klein
Operations Technician
February 8, 2000

