

YATES PETROLEUM CORPORATION  
Brannigan ANF Federal #4  
Section 6-T22S-R24E  
Eddy County, New Mexico

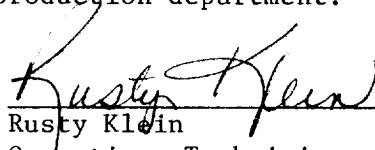
SUNDRY NOTICE CONTINUED:

Straddled perforations 7859-7862' and acidized with 1000 gallons 20% iron control HCL acid. Straddled perforations 7757-7814' and acidized with 2000 gallons 20% iron control HCL acid and ball sealers. Perforations already broke. Straddled perforations 7757-7862'. Swabbed. Unset packer. TOOH with tubing and packer.

6-11-97 - Rigged up wireline. TIH with 4" casing guns and perforated 7644-7654' w/11 .41" holes (1 SPF - Canyon). TOOH with casing guns and rigged down wireline. TIH with packer and 2-7/8" tubing. Unset RBP at 7832'. Pulled up and reset RBP at 7707'. Tested RBP to 1800 psi. Pulled up and set packer at 7581'. Acidized perforations 7644-7654' with 2000 gallons 20% iron control HCL acid and ball sealers. Swabbed. Unset packer. TOOH with tubing and packer.

6-12-97 - Rigged up wireline. TIH with 4" casing guns and perforated 7573-7587' w/15 .41" holes (1 SPF - Canyon). TOOH with casing guns and rigged down wireline. TIH with packer and tubing. Unset RBP at 7707'. Pulled up and reset RBP at 7612'. Tested RBP to 1900 psi. Pulled up and set packer at 7519'. Acidized perforations 7573-7587' with 2000 gallons 20% iron control HCL acid and ball sealers. Swabbing.

6-13-97 - Unset packer. Dropped down and unset RBP. Reset RBP at 7832' and tested to 1400 psi. Pulled up and set packer at 7519'. Loaded annulus with 2% KCL water. Acidized perforations 7573-7814' with 40000 gallons 20% gelled iron control HCL acid and ball sealers. Swabbed. Released well to production department.

  
Rusty Klein  
Operations Technician  
June 13, 1997

RECEIVED  
1997 JUN 17 A 9:21  
BUREAU OF LAND MGMT.  
ROSWEEL OFFICE