

20-012-21110

V-2-21-28

OXY USA Inc.

OXY Pronghorn State #1

Tops

T. Rustler. - 294'

T. SALT. - 2350'

T. Dela. - 2948'

T. B.S. - 6366'

T. W.C. - 9220'

T. Morrow - 11,914'

13 $\frac{7}{8}$ " - 530'
circ.

8 $\frac{5}{8}$ " - 3280'
circ.

* 205X cement surface Plug,

* 405X cement Plug 580' - 480'

* 405X cement Plug 2440' - 2340' TAG

* 505X cement Plug 3330' - 3230' TAG

* 505X cement Plug 4315' - 4215'

* 505X cement Plug 6415' - 6315'

* 505X cement Plug 7500' - 7400'

* 505X cement Plug 9600' - 9500' TAG

* Cut & Pull 4 $\frac{1}{2}$ " - 9550'

* 255X cement Plug 10,490' - 890'

* 255X cement Plug 11,425' - 11325'


* Run & set CIBP $\oslash$ 12350' w/35' cement.

111
X

4 $\frac{1}{2}$ " - 12,550' $\neq$ Perf. 12400' - 423'

TOC - 9543' CBL

OXY USA INC. CURRENT
OXY PRONGHORN STATE #1
SEC 2 T21S R28E EDDY NM

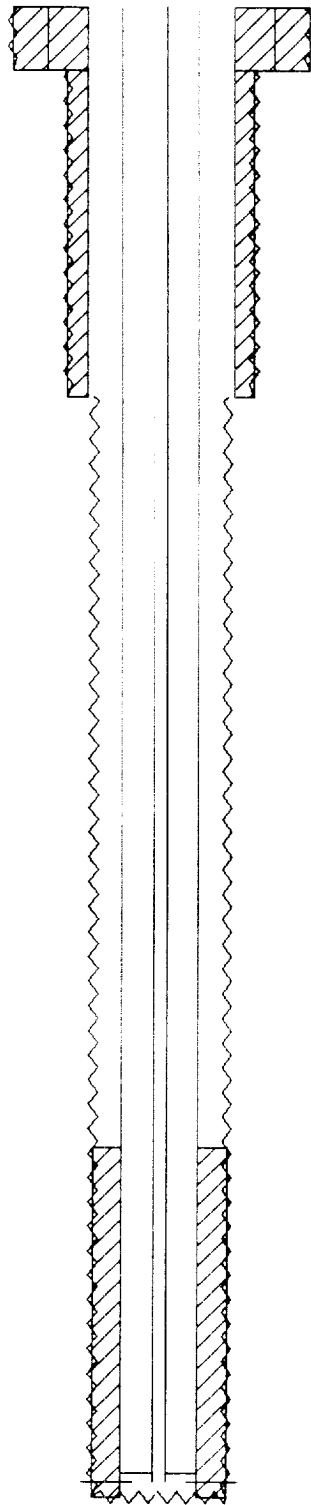

0.0 - 530.0' 17 1/2" OD HOLE
0.0 - 530.0' CEMENT 600sx-CIRC
0.0 - 530.0' 13 3/8" OD SURF CSG

530.0 - 3280.0' 11" OD HOLE
0.0 - 3280.0' CEMENT 1200sx-CIRC
0.0 - 3280.0' 8 5/8" OD INT CSG


3280.0 - 12550.0' 7 7/8" OD HOLE
9593.0 - 12550.0' CEMENT 600sx-CBL
0.0 - 12550.0' 4 1/2" OD PROD CSG

0.0 - 12420.0' 2.375" OD TBG
12343.0 - 12345.0' RETRV. PACKER

12408.0 - 12423.0' PERFS

PBTD: 12509'
TD: 12550'

USA INC. PROPOSED
OXY PRONGHORN STATE #1
SEC 2 T21S R28E EDDY NM

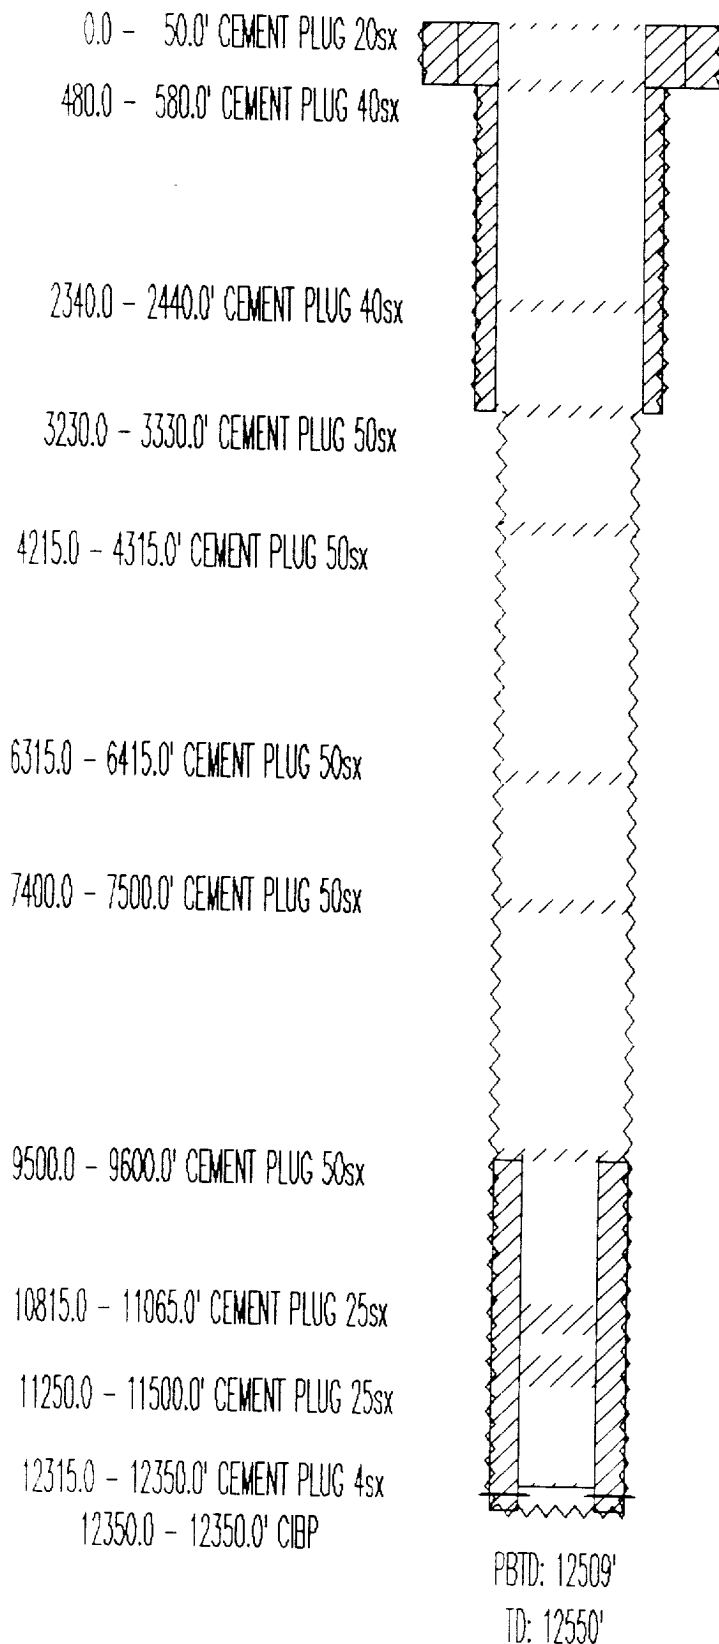

0.0 - 530.0' 17 1/2" OD HOLE
0.0 - 530.0' CEMENT 600sx-CIRC
0.0 - 530.0' 13 3/8" OD SURF CSG

530.0 - 3280.0' 11" OD HOLE
0.0 - 3280.0' CEMENT 1200sx-CIRC
0.0 - 3280.0' 8 5/8" OD INT CSG

3280.0 - 12550.0' 7 7/8" OD HOLE
9593.0 - 12550.0' CEMENT 600sx-CBL
9550.0 - 12550.0' 4 1/2" OD PROD CSG

12408.0 - 12423.0' ABANDONED PERFS