

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.

Use "APPLICATION FOR PERMIT-" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

ARMSTRONG ENERGY CORPORATION

3. Address and Telephone No.

**P.O. Box 1973
Roswell, New Mexico 88202-1973 505-623-8726**

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

990' FNL and 2130' FWL

Sec.22,T21S,R25E

5. Lease Designation and Serial No.

NM-029128

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Basin Fed. #1

9. API Well No.

30- -015-29977

10. Field and Pool, or Exploratory Area

Catclaw Draw Delaware

11. County or Parish, State

Eddy

12. CHECK APPROPRIATE BOX(es) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

TYPE OF ACTION

☐ Notice of Intent

☒ Subsequent Report

☐ Final Abandonment Notice

☒ Abandonment

☐ Recompletion

☐ Plugging Back

☐ Casing Repair

☐ Altering Casing

☐ OTHER

☐ Change of Plans

☐ New Construction

☐ Non-Routine Fracturing

☐ Water Shut-Off

☐ Conversion to Injection

☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Plug and abandon this well:

1. Capped existing CIBP located at 2265'. Fill was at 2134'. Set 10 SX cement plug.
2. Set CIBP at 1820' to cover existing perms from 1898' to 2074'. Circulate hole with salt gel mud. Cap CIBP with cement up to 1524" which covered 8 5/8" casing shoe with cement 60' below and 236" above. 8 5/8" casing shoe is at 1760'.
3. Set 60' cement plug at surface.
4. Set dry hole marker per BLM specifications.
5. Work completed 10-28-98.

All casing was left in well. 20' of 14" 48# conductor pipe, 1760' of 8 5/8" 24# surface casing, 3550' of 5 1/2" 15.5# production casing.

NOTE: As soon as all surface equipment is removed from location, the location and road will be remediated per BLM requirements.



**Post ID-2
12-18-98
P+H**

14. I hereby certify that the foregoing is true and correct

Signed *Thad Syg*

Title Consultant


(This space for Federal or State office use)

Approved by

Title

Conditions of approval, if any:

Date **November 10, 1998**

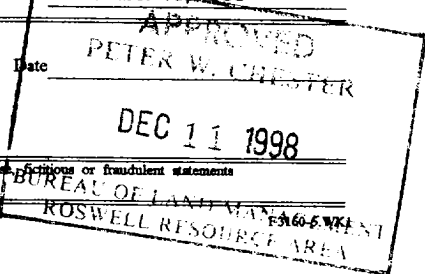

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

* See Instruction on Reverse Side