

YATES PETROLEUM CORPORATION

Aviette ALK State Com #2

Section 17-T21S-R27E

Eddy County, New Mexico

SUNDRY NOTICE CONTINUED:

7-25-2000 - Bled well down. Loaded tubing with super fluid. Released packer. Nippled down wellhead and nipped up BOP. TOOH with packer and tubing. TIH with cement retainer and set retainer at 11570' and tested. Shut down for night.

7-26-2000 - Shut down.

7-27-2000 - Squeezed perforations 11594-11598' with 100 sacks "H" with fluid loss.

Spotted cement to end of tubing. Pressured annulus to 750 psi, put cement away at 0.4 BPM. Reversed excess cement to pit - 23 sacks into formation and 76 sacks to pit. Left 2' of cement on top of retainer. TOOH with tubing and stinger. Shut down for night.

WOC.

7-28-2000 - Rigged up wireline. TIH with 4" casing guns and perforated 11484-11512' w/60 .41" holes as follows: 11484-11488', 11492-11496' and 11508-11512' (4 SPF - Morrow). TOOH with casing guns and rigged down wireline. TIH with packer with 1.81" F profile. Set packer at 11415'. Nippled down BOP and nipped up wellhead. Swabbed well down. Shut well in.

7-29-2000 - Flow tested. Shut well in.


7-30-31-2000 - Shut in.

8-1-2000 - Flow tested.

8-2-2000 - Bled well down. Acidized perforations 11484-11512' with 11000 gallons 7-1/2% MSA acid with 1000 scf/bbl N2. Flowed well back. Shut well in.

8-3-2000 - Opened well and flow testing.

8-4-2000 - Shut well in. Released well to production department.

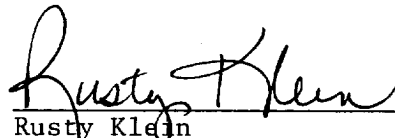

Rusty Klein

Operations Technician

September 20, 2000