


# Avalon 1 Federal #4


Exhibit #1

MINIMUM BLOW-OUT PREVENTER REQUIREMENTS  
ALL 5000 PSI WP EQUIPMENT  
(Except Casinghead & Spools as noted below)

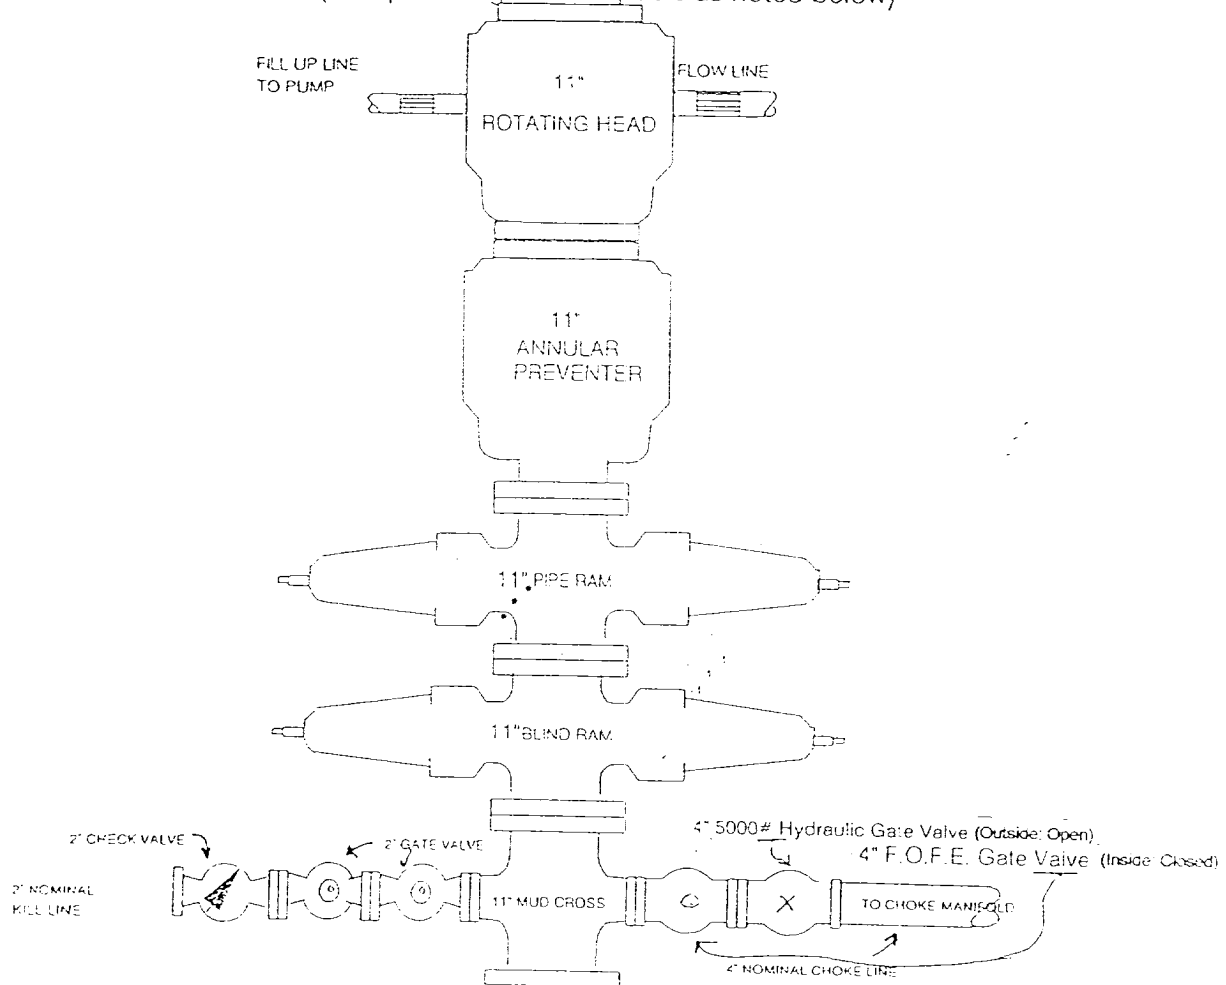

WELLHEAD EQUIPMENT:  
Surface Profile:

± - 700'

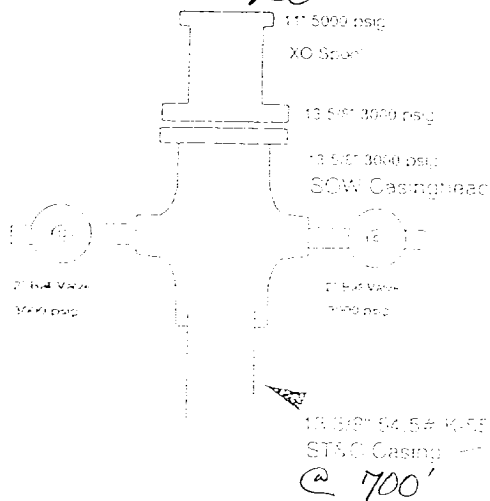

WELLHEAD EQUIPMENT:  
Intermediate Profile

700' - T.O. @ 11,745' MD

