

Form 3160-3
(August 1999)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT



APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: ☒ DRILL ☐ REENTER		5. Lease Serial No. NM-059077	
b. Type of Well: ☐ Oil Well ☒ Gas Well ☐ Other ☐ Single Zone ☐ Multiple Zone		6. If Indian, Allottee or Tribe Name	
2. Name of Operator Yates Petroleum Corporation		7. If Unit or CA Agreement, Name and No. 168-7	
3A. Address 105 South Fourth Street Artesia, New Mexico 88210		8. Lease Name and Well No. HOC Federal Com. #4	
3b. Phone No. (include area code) (505) 748-1471		9. API Well No. 30-015-31754	
4. Location of Well (Report location clearly and in accordance with any State requirements.) At surface 236' FNL & 143' FWL Surface Location At proposed prod. Zone 660' FNL & 1980' FEL Bottom Hole Location		10. Field and Pool, or Exploratory Indian Basin Upper Penn	
14. Distance in miles and direction from nearest town or post office* Approximately 20 miles northwest of Carlsbad, New Mexico		11. Sec., T., R., M., or Bk. and Survey or Area Sec. 18, T22S-R24E Surface Loc. Sec. 13, T22S-R23E Bottom Hole.	
15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 149'	16. No. of Acres in lease 600	17. Spacing Unit dedicated to this well 320	
18. Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft. 1 mile	19. Proposed Depth 8300' TVD, 8450' MD	20. BLM/BIA Bond No. on file 585997	
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 4087' GL	22. Approximate date work will start* ASAP	23. Estimated duration 60 days	

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification.
- Such other site specific information and/or plans as may be required by the authorized office.

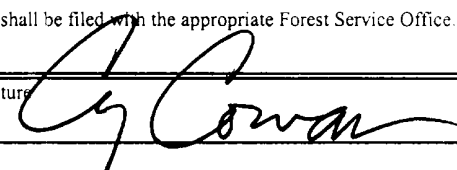25. Signature 	Name (Printed/Typed) Cy Cowan	Date 3/27/01
Title: Regulatory Agent		
Approved by (Signature) 	Name (Printed/Typed) Joe G. Lara	Date APR 2 - 2001
Title Field Office	Office CARLSBAD FIELD OFFICE	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on reverse)

APPROVAL SUBJECT TO
GENERAL PERMITS AND
SPECIAL REGULATIONS
ATTACHED

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 South First, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
2040 South Pacheco, Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources

OIL CONSERVATION DIVISION
2040 South Pacheco
Santa Fe, NM 87505

Form C-102
Revised March 17, 1999

Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number		Pool Code		Pool Name Indian Basin Upper Penn	
Property Code		Property Name HOC FEDERAL COM			Well Number 4
OGRID No. 025575		Operator Name YATES PETROLEUM CORPORATION			Elevation 4087.

10 Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
LOT 1	18	22-S	24-E		236	NORTH	143	WEST	EDDY

11 Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
B	13	22-S	23-E		660	NORTH	1980	EAST	EDDY
Dedicated Acres 320	Joint or Infill	Consolidation Code	Order No.						

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

	17 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief Signature <i>Cy Cowan</i> Printed Name Regulatory Agent Title March 26, 2001 Date
	18 SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. MARCH 13, 2001 Date of Survey Signature and Seal of Professional Engineer NEW MEXICO 5412 REGISTERED LAND SURVEYOR NM PREPSF0005412

YATES PETROLEUM CORPORATION

HOC Federal Com. #4

Drilling Prognosis

Page 2

Yates Petroleum Corporation proposes to drill this well vertically to a depth of 2,091'. At this point directional tools will be picked up and the well will be "kicked off" directionally. A build rate of 2.5 deg/100' will be utilized until an angle of 25 degrees is reached (this should occur at 3,060' TVD). The 25 degree angle will be held to a TVD of 6,780', when we will pick up directional tools again and begin dropping angle at a rate of 25 deg/100'. The wellbore will be returned to vertical at the top of the Canyon Dolomite (7,750'), and the remainder of the well will be drilled vertically to 8,300' TVD, 8,750' MD.

YATES PETROLEUM CORPORATION
HOC Federal Com. #4
236' FNL & 143' FWL Surface Location
Section 18-T22S-R24E
660' FNL and 1980' FEL Bottom Hole location
Section 13, T22S-R23E
Eddy County, New Mexico

1. The estimated tops of geologic markers are as follows:

San Andres	846'
Glorietta	2247'
Bone Spring	3037'
Wolf Camp	7002'
Canyon	7800'
TD	8300' TVD, 8750' MD

2. The estimated depths at which anticipated water, oil or gas formations are expected to be encountered:

Water:	250-300'
Oil or Gas:	All potential zones.

3. Pressure Control Equipment: BOPE will be installed on the 9 5/8" casing and rated for 3000 BOP systems will be consistent with API RP 53. Pressure tests will be conducted before drilling out from under all casing strings which are set and cemented in place. Blowout Preventor controls will be installed prior to drilling the surface plug and will remain in use until the well is completed or abandoned. Preventors will be inspected and operated at least daily to ensure good mechanical working order, and this inspection recorded on the daily drilling report. See Exhibit B.

Auxiliary Equipment:

- A. Auxiliary Equipment: Kelly cock, pit level indicators, flow sensor equipment and a sub with full opening valve to fit the drill pipe and collars will be available on the rig floor in the open position at all times for use when kelly is not in use.

4. THE PROPOSED CASING AND CEMENTING PROGRAM:

A. Casing Program: (All New)

<u>Hole Size</u>	<u>Casing Size</u>	<u>Wt./Ft</u>	<u>Grade</u>	<u>Coupling</u>	<u>Interval</u>	<u>Length</u>
14 3/4"	9 5/8"	36#	J-55	ST&C	0-1600'	1600'
8 3/4"	7.0"	26#	J-55	LT&C	0-200'	200'
8 3/4"	7.0"	23#	J-55	LT&C	200'-5100'	4900'
8 3/4"	7.0"	26#	J-55	LT&C	5100'-7200'	2100'
8 3/4"	7.0"	26#	N-80	LT&C	7200'-8750'	1550'

Minimum Casing Design Factors: Collapse 1.125, Burst 1.0, Joint Strength 1.8

B. Cementing Program:

Surface casing: 1000 sx Lite (YLD 2.02 WT 12.4) tailed in with 250 sx Class C + 2% CaCl₂ (YLD 1.32 WT 14.8)

Production Casing: TOC-1000', DV tool at 6000'.

Stage I: 350 sx Super C (YLD 1.67 WT 13.0).

Stage II: 600 sx Lite (YLD 2.02 WT 12.4), tail in with 200 sx Class C (YLD 1.32 WT 14.8).

5. MUD PROGRAM AND AUXILIARY EQUIPMENT:

<u>Interval</u>	<u>Type</u>	<u>Weight</u>	<u>Viscosity</u>	<u>Fluid Loss</u>
0-1600'	FW Gel/LCM	8.3-8.6	30	N/C
1600'-8200'	Cut Brine	9.0-9.2	29	N/C
8200'-TD'	Cut Brinel/Starch	9.0-9.2	30-34	<10cc

Sufficient mud material(s) to maintain mud properties, control lost circulation and contain a blow out will be available at the well site during drilling operations. Mud will be checked hourly by rig personnel.

6. EVALUATION PROGRAM:

Samples: 10' samples out from under surface casing.

Logging: CNL/LDT from TD to casing w/ CR-CNL to surface: DLL from TD to casing w/ RXO from TD.

Coring: As warranted.

DST's: As warranted.

7. ABNORMAL CONDITIONS, BOTTOM HOLE PRESSURE AND POTENTIAL HAZARDS:

Anticipated BHP:

From: 0	TO: 1600'	Anticipated Max. BHP: 130	PSI
From: 1600'	TO: 2400'	Anticipated Max. BHP: 950	PSI
From: 2400'	TO: 8750'	Anticipated Max. BHP: 2800	PSI

Abnormal Pressures Anticipated: None

Lost Circulation Zones Anticipated: Possible in surface hole.

H₂S Zones Anticipated: Possible Canyon

Maximum Bottom Hole Temperature: 159 F

8. ANTICIPATED STARTING DATE:

Plans are to drill this well as soon as possible after receiving approval. It should take approximately 30 days to drill the well with completion taking another 20 days.

MULTI-POINT SURFACE USE AND OPERATIONS PLAN
Yates Petroleum Corporation
HOC Federal Com. #4
236' FNL & 143' FWL Surface Location
Section 18-T22S-R24E
660' FNL and 1980' FEL Bottom Hole location
Section 13, T22S-R23E
Eddy County, New Mexico

This plan is submitted with Form 3160-3, Application for Permit to Drill, covering the above described well. The purpose of this plan is to describe the location of the proposed well, the proposed construction activities and operations plan, the magnitude of the surface disturbance involved and the procedures to be followed in rehabilitating the surface after completion of the operations, so that a complete appraisal can be made of the environmental effect associated with the operations.

1. EXISTING ROADS:

Exhibit A is a portion of the BLM map showing the well and roads in the vicinity of the proposed location. The proposed wellsite is located approximately 20 miles northwest of Carlsbad, New Mexico and the access route to the location is indicated in red and green on Exhibit A.

DIRECTIONS:

Go north of Carlsbad on Highway 285 to Highway 137. Turn west on Highway 137 and go approximately 14.3 miles to a cattle guard. Continue south for approx. 1 mile to another cattleguard. Turn left here on lease road to the Hickory Federal #2. This lease road also has a powerline and a pipeline along it go approx. .4 of a mile to the northwest corner of the well pad.

2. PLANNED ACCESS ROAD

- A. There will be no new access road.
- B. N/A
- C. N/A
- D. The route of the road is visible.
- E. Existing roads will be maintained in the same or better condition.

3. LOCATION OF EXISTING WELL

- A. There is drilling activity within a one-mile radius of the wellsite.
- B. Exhibit D shows existing wells within a one-mile radius of the proposed wellsite.

4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES

- A. There are production facilities on this lease at the present time.
- B. In the event that the well is productive, the necessary production facilities will be installed on the drilling pad. If the well is productive oil, a gas or diesel self-contained unit will be used to provide the necessary power. No power will be required if the well is productive of gas.

5. LOCATION AND TYPE OF WATER SUPPLY:

- A. It is planned to drill the proposed well with a fresh water system. The water will be obtained from commercial sources and will be hauled to the location by truck over the existing and proposed roads shown in Exhibit A.

6. SOURCE OF CONSTRUCTION MATERIALS:

Dirt contractor will locate closest pit and obtain any permits and material needed for construction.

7. METHODS OF HANDLING WASTE DISPOSAL:

- A. Drill cuttings will be disposed of in the reserve pits.
- B. Drilling fluids will be allowed to evaporate in the reserve pits until the pits are dry.
- C. Water produced during operations will be collected in tanks until hauled to an approved disposal system, or separate disposal application will be submitted.
- D. Oil produced during operations will be stored in tanks until sold.
- E. Current laws and regulations pertaining to the disposal of human waste will be complied with.
- F. All trash, junk, and other waste materials will be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary land fill. Burial on site is not approved.

8. ANCILLARY FACILITIES: None.

9. WELLSITE LAYOUT:

- A. Exhibit C shows the relative location and dimensions of the well pad, the reserve pits, the location of the drilling equipment, rig orientation and access road approach.
- B. The reserve pits will be plastic lined.
- C. A 400' x 400' area has been staked and flagged.

10. PLANS FOR RESTORATION

- A. After finishing drilling and/or completion operations, all equipment and other material not needed for further operations will be removed. The location will be cleaned of all trash and junk to leave the wellsite in as aesthetically pleasing a condition as possible.
- B. Unguarded pits, if any, containing fluids will be fenced until they have dried and been leveled.
- C. If the proposed well is non-productive, all rehabilitation and/or vegetation requirements of the Bureau of Land Management will be complied with and will be accomplished as expeditiously as possible. All pits will be filled level after they have evaporated and dried.


11. SURFACE OWNERSHIP: Bureau of Land Management, Carlsbad, New Mexico.
12. OTHER INFORMATION:
 - A. Topography: Refer to the existing archaeological report for a description of the topography, flora, fauna, soil characteristics, dwellings, historical and cultural sites.
 - B. The primary surface use is for grazing.
13. OPERATOR'S REPRESENTATIVE
 - A. Through A.P.D. Approval:

Cy Cowan, Regulatory Agent
Yates Petroleum Corporation
105 South Fourth Street
Artesia, New Mexico 88210
Phone (505) 748-1471
 - B. Through Drilling Operations, Completions and Production:


Pinson McWhorter, Operations Manager
Yates Petroleum Corporation
105 South Fourth Street
Artesia, New Mexico 88210
Phone (505) 748-1471
14. CERTIFICATION:

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route, that I am familiar with the conditions which presently exist; that the statements made in this plan are to the best of my knowledge, true and correct; and , that the work associated with the operations proposed herein will be performed by Yates Petroleum Corporation and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

3/26/01



Regulatory Agent

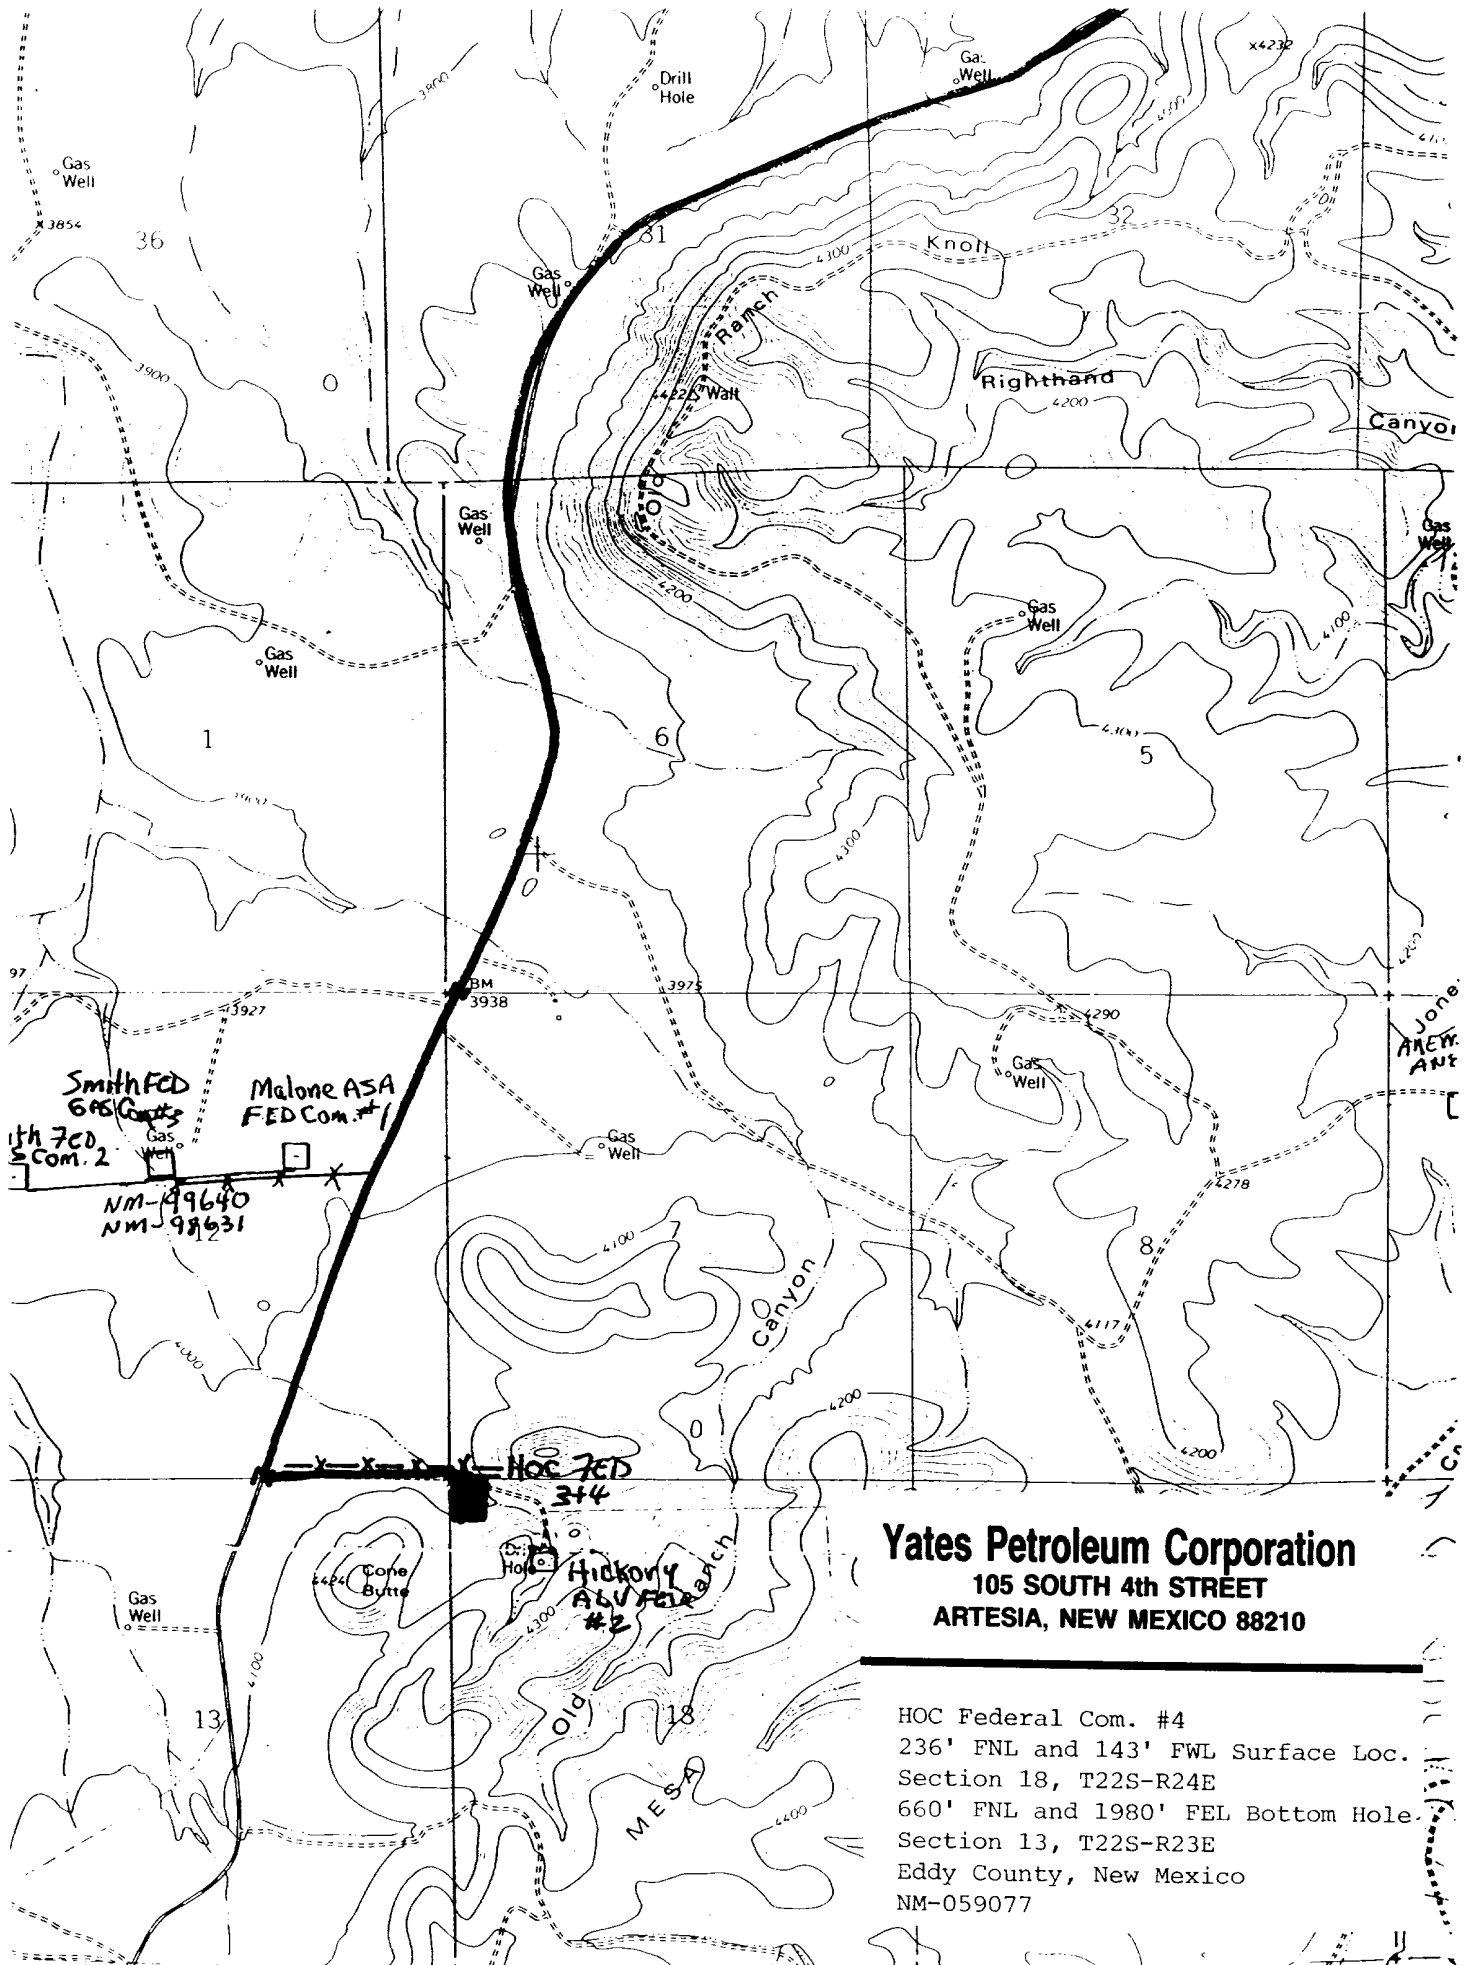

Yates Petroleum Corporation
105 SOUTH 4th STREET
ARTESIA, NEW MEXICO 88210

HOC Federal Com. #4
236' FNL and 143' FWL Surface Loc.
Section 18, T22S-R24E
660' FNL and 1980' FEL Bottom Hole.
Section 13, T22S-R23E
Eddy County, New Mexico
NM-059077



Yates Petroleum Corporation

Location Layout for Permian Basin

Up to 12,000'


PITS EAST.

HOC Federal Com. #4
236' FNL and 143' FNL Surface Loc.
Section 18, T22S-R24E
660' FNL and 1980' FEL Bottom Hole
Section 13, T22S-R23E
Eddy County, New Mexico
NM-059077

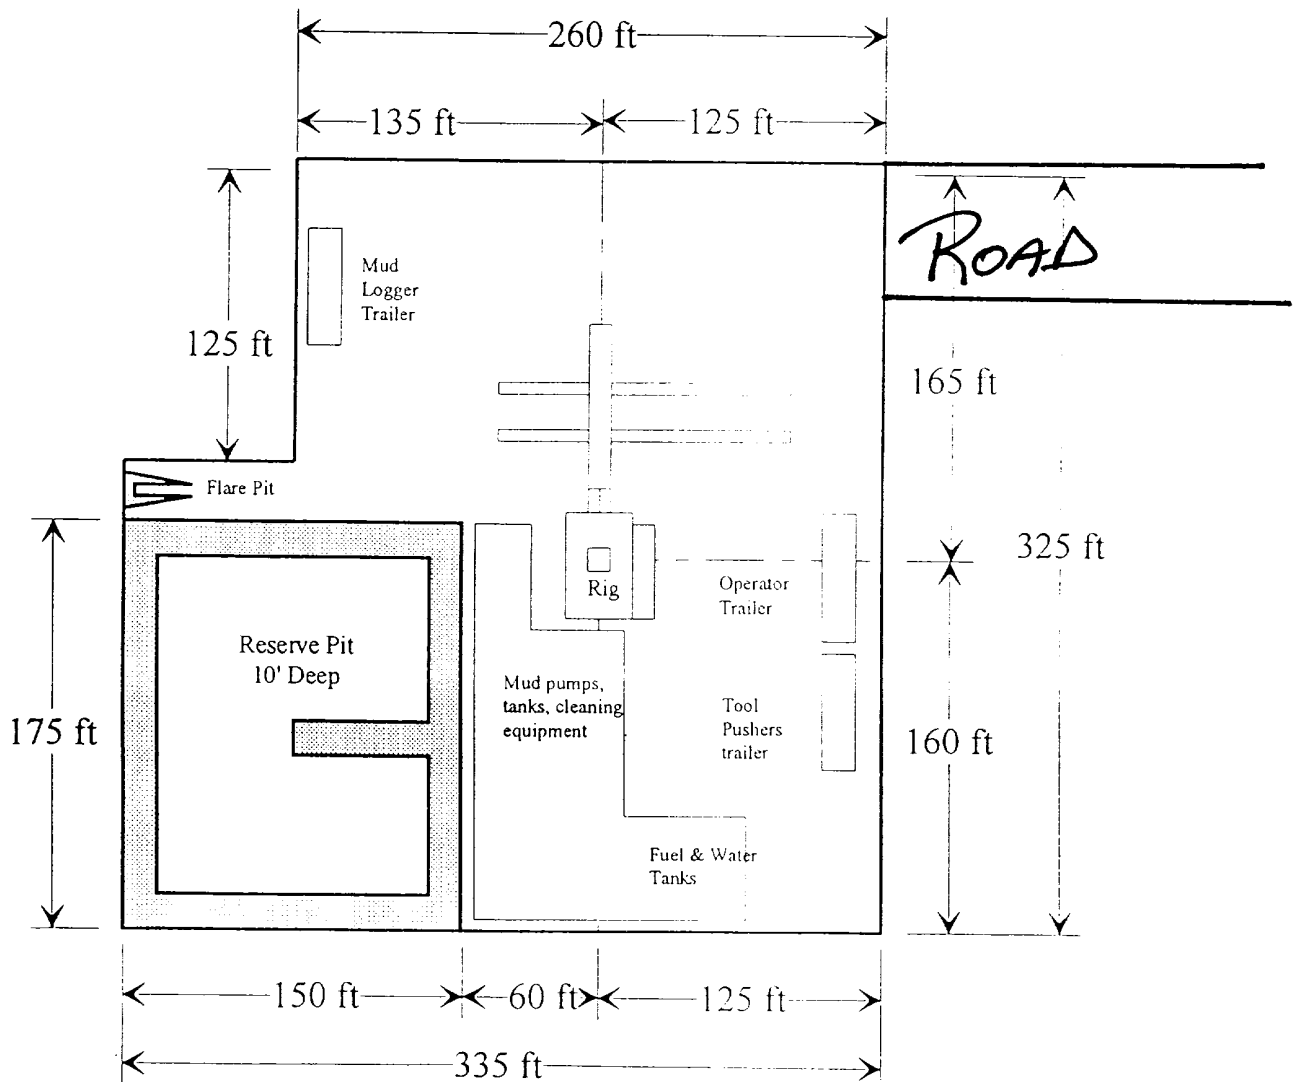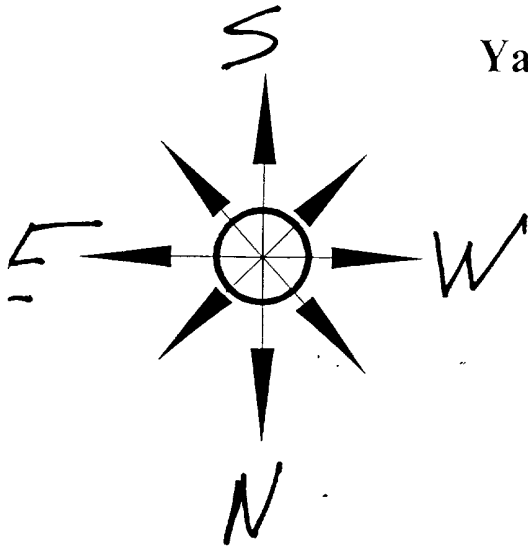

Distance from Well Head to Reserve Pit will vary between rigs


The above dimension should be a maximum




Yates Petroleum Corporation


Typical 3,000 psi Pressure System
Schematic
Annular with Double Ram Preventer Stack

HOC Federal Com. #4
236' FNL and 143' FWL Surface Loc.
Section 18, T22S-R24E
660' FNL and 1980' FEL
Section 13, T22S-R23E Bottom Hole
Eddy County, New Mexico
NM-059077

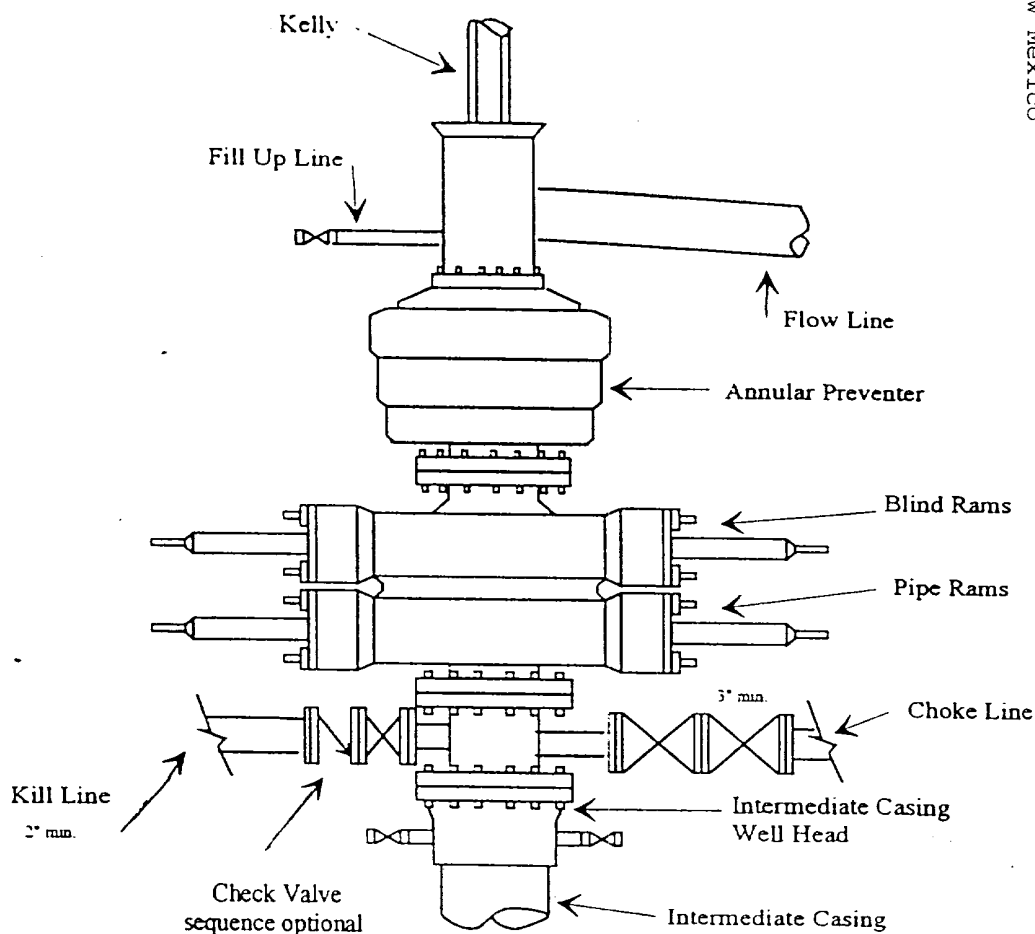

Typical 3,000 psi choke manifold assembly with at least these minimum features

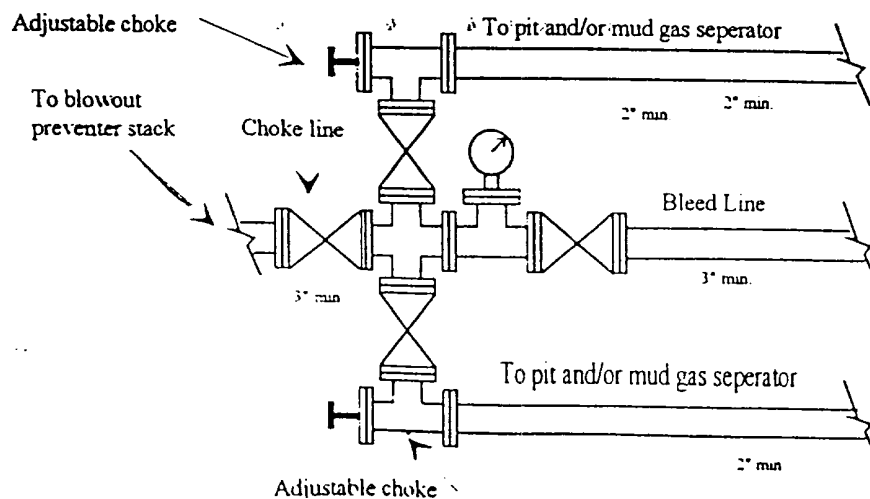

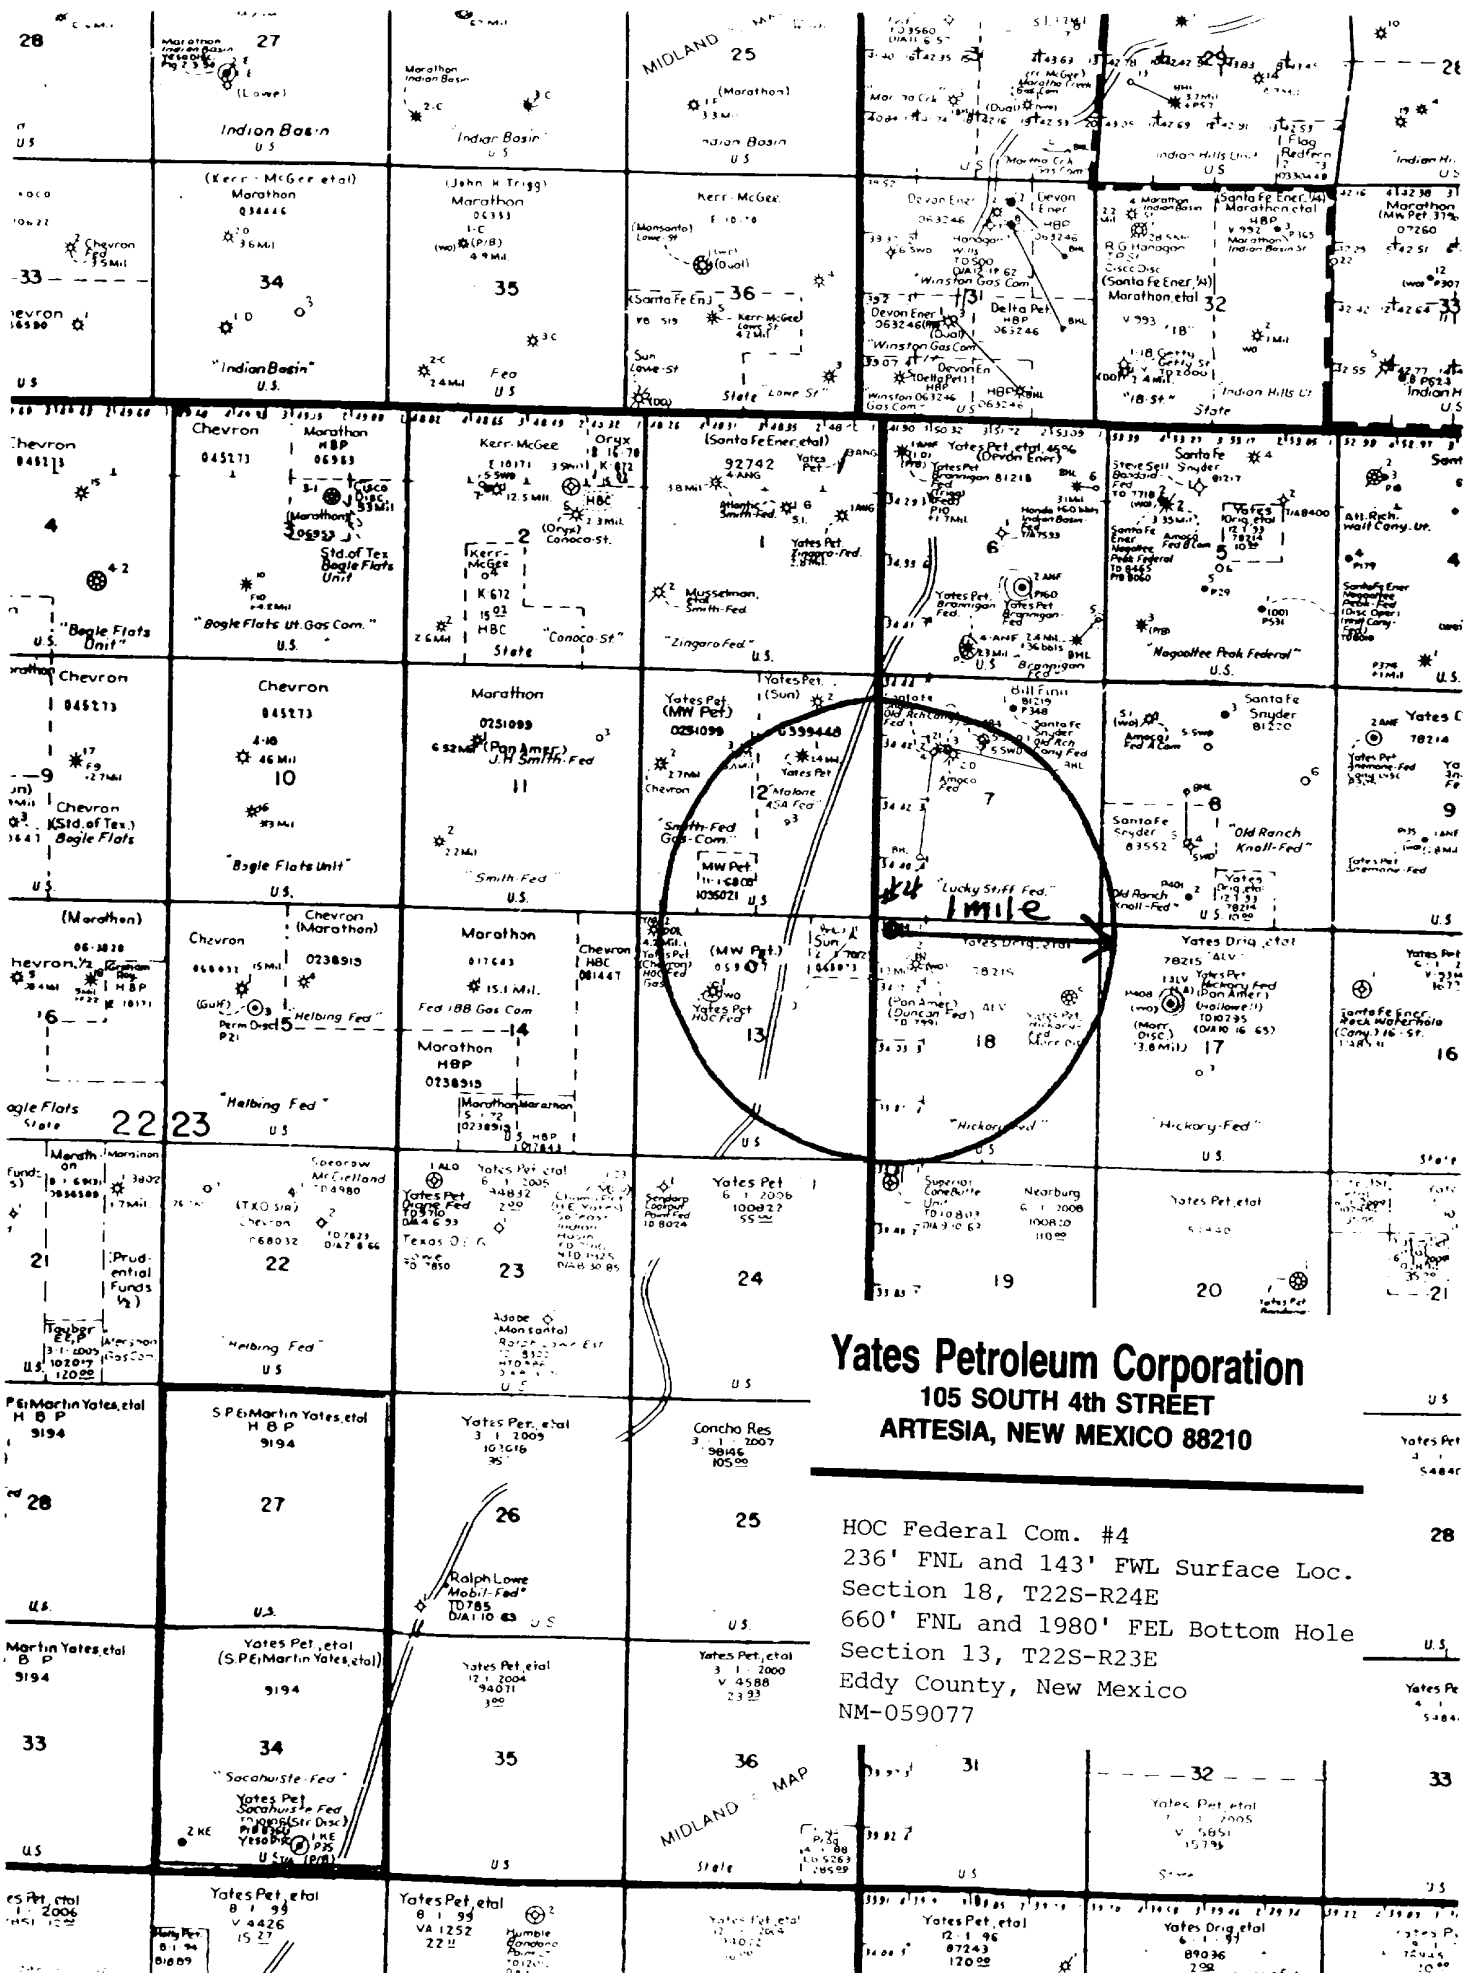

Yates Petroleum Corporation
105 SOUTH 4th STREET
ARTESIA, NEW MEXICO 88210

HOC Federal Com. #4
236' FNL and 143' FWL Surface Loc.
Section 18, T22S-R24E
660' FNL and 1980' FEL Bottom Hole
Section 13, T22S-R23E
Eddy County, New Mexico
NM-059077

28

U.S.

Yates Pe
S-084

33

U.S.

Hoc4.txt

Job Number: 1

State/Country: EDDY/NM/USA

Company: Yates Petroleum Corporation

Declination:

Lease/Well: HOC Federal #4

Grid:

Location: Surf: Section 18 T22S-R24E, 236' N & 143' W, BHL: Sec. 13 T22S-R23E, 660' N & 1,980' E

Date/Time: 26-Mar-01 / 08:11

Log Name:

Curve Name:

KB:

.L. or M.S.L.:

WINSERVE SURVEY CALCULATIONS

Minimum Curvature Method

Vertical Section Plane 258.71

Vertical Section Referenced to offset from Wellhead: EW =.00 Ft, NS=.00 Ft

Rectangular Coordinates Referenced to Wellhead

Measured Depth FT	Incl Angle Deg	Drift Direction Deg	True Vertical Depth	N-S FT	E-W FT	Vertical Section FT	CLOSURE Distance FT	CLOSURE Direction Deg	Dogleg Severity Deg/100
-U DIRECTIONAL TOOLS, BEGIN BUILDING ANGLE AT A RATE OF 2.5 DEGREES/100'.									
2091.13	.00	258.71	2091.13	.00	.00	.00	.00	.00	.00
2121.13	.75	258.71	2121.13	-.04	-.19	.20	.20	258.71	2.50
2151.13	1.50	258.71	2151.12	-.15	-.77	.79	.79	258.71	2.50
2181.13	2.25	258.71	2181.10	-.35	-1.73	1.77	1.77	258.71	2.50
2211.13	3.00	258.71	2211.07	-.62	-3.08	3.14	3.14	258.71	2.50
2241.13	3.75	258.71	2241.02	-.96	-4.81	4.91	4.91	258.71	2.50
2271.13	4.50	258.71	2270.94	-1.38	-6.93	7.06	7.06	258.71	2.50
2301.13	5.25	258.71	2300.83	-1.88	-9.43	9.61	9.61	258.71	2.50
2331.13	6.00	258.71	2330.69	-2.46	-12.31	12.55	12.55	258.71	2.50
2361.13	6.75	258.71	2360.50	-3.11	-15.58	15.89	15.89	258.71	2.50
2391.13	7.50	258.71	2390.27	-3.84	-19.23	19.61	19.61	258.71	2.50
2421.13	8.25	258.71	2419.99	-4.65	-23.26	23.72	23.72	258.71	2.50
2451.13	9.00	258.71	2449.65	-5.53	-27.67	28.22	28.22	258.71	2.50
2481.13	9.75	258.71	2479.25	-6.48	-32.46	33.10	33.10	258.71	2.50
2511.13	10.50	258.71	2508.78	-7.52	-37.63	38.38	38.38	258.71	2.50
2541.13	11.25	258.71	2538.24	-8.62	-43.18	44.04	44.04	258.71	2.50
2571.13	12.00	258.71	2567.63	-9.81	-49.11	50.08	50.08	258.71	2.50
2601.13	12.75	258.71	2596.93	-11.07	-55.42	56.51	56.51	258.71	2.50
2631.13	13.50	258.71	2626.14	-12.40	-62.10	63.32	63.32	258.71	2.50
2661.13	14.25	258.71	2655.27	-13.81	-69.15	70.52	70.52	258.71	2.50
2691.13	15.00	258.71	2684.30	-15.29	-76.58	78.09	78.09	258.71	2.50
2721.13	15.75	258.71	2713.22	-16.85	-84.38	86.05	86.05	258.71	2.50
2751.13	16.50	258.71	2742.04	-18.48	-92.55	94.38	94.38	258.71	2.50
2781.13	17.25	258.71	2770.75	-20.19	-101.09	103.09	103.09	258.71	2.50
2811.13	18.00	258.71	2799.34	-21.97	-110.00	112.17	112.17	258.71	2.50
2841.13	18.75	258.71	2827.81	-23.82	-119.27	121.63	121.63	258.71	2.50

PAGE - 1

H004.txt

Measured Depth FT	Incl Angle Deg	Drift Direction Deg	True Vertical Depth	N-S FT	E-W FT	Vertical Section FT	CLOSURE Distance FT	CLOSURE Direction Deg	Degrees Severity Deg/100
2871.13	19.50	258.71	2856.16	-25.75	-128.91	131.46	131.46	258.71	2.50
2901.13	20.25	258.71	2884.37	-27.74	-138.91	141.66	141.66	258.71	2.50
2931.13	21.00	258.71	2912.45	-29.81	-149.27	152.22	152.22	258.71	2.50
2961.13	21.75	258.71	2940.38	-31.95	-160.00	163.16	163.16	258.71	2.50
2991.13	22.50	258.71	2968.17	-34.17	-171.08	174.46	174.46	258.71	2.50
3021.13	23.25	258.71	2995.81	-36.45	-182.51	186.12	186.12	258.71	2.50
3051.13	24.00	258.71	3023.30	-38.81	-194.30	198.14	198.14	258.71	2.50
3081.13	24.75	258.71	3050.62	-41.23	-206.44	210.52	210.52	258.71	2.50
ND OF BUILD, HOLD 25 DEGREE ANGLE									
3091.13	25.00	258.71	3059.70	-42.05	-210.57	214.73	214.73	258.71	2.50
3191.13	25.00	258.71	3150.33	-50.33	-252.01	256.99	256.99	258.71	.00
3291.13	25.00	258.71	3240.96	-58.61	-293.46	299.25	299.25	258.71	.00
3391.13	25.00	258.71	3331.59	-66.89	-334.90	341.51	341.51	258.71	.00
3491.13	25.00	258.71	3422.22	-75.16	-376.34	383.77	383.77	258.71	.00
3591.13	25.00	258.71	3512.85	-83.44	-417.79	426.04	426.04	258.71	.00
3691.13	25.00	258.71	3603.48	-91.72	-459.23	468.30	468.30	258.71	.00
3791.13	25.00	258.71	3694.11	-99.99	-500.67	510.56	510.56	258.71	.00
3891.13	25.00	258.71	3784.74	-108.27	-542.12	552.82	552.82	258.71	.00
3991.13	25.00	258.71	3875.37	-116.55	-583.56	595.08	595.08	258.71	.00
4091.13	25.00	258.71	3966.01	-124.82	-625.00	637.34	637.34	258.71	.00
4191.13	25.00	258.71	4056.64	-133.10	-666.45	679.61	679.61	258.71	.00
4291.13	25.00	258.71	4147.27	-141.38	-707.89	721.87	721.87	258.71	.00
4391.13	25.00	258.71	4237.90	-149.65	-749.33	764.13	764.13	258.71	.00
4491.13	25.00	258.71	4328.53	-157.93	-790.78	806.39	806.39	258.71	.00
4591.13	25.00	258.71	4419.16	-166.21	-832.22	848.65	848.65	258.71	.00
4691.13	25.00	258.71	4509.79	-174.49	-873.66	890.92	890.92	258.71	.00
4791.13	25.00	258.71	4600.42	-182.76	-915.11	933.18	933.18	258.71	.00
4891.13	25.00	258.71	4691.05	-191.04	-956.55	975.44	975.44	258.71	.00
4991.13	25.00	258.71	4781.68	-199.32	-997.99	1017.70	1017.70	258.71	.00
5091.13	25.00	258.71	4872.31	-207.59	-1039.44	1059.96	1059.96	258.71	.00
5191.13	25.00	258.71	4962.94	-215.87	-1080.88	1102.23	1102.23	258.71	.00
5291.13	25.00	258.71	5053.57	-224.15	-1122.32	1144.49	1144.49	258.71	.00
5391.13	25.00	258.71	5144.21	-232.42	-1163.77	1186.75	1186.75	258.71	.00
5491.13	25.00	258.71	5234.84	-240.70	-1205.21	1229.01	1229.01	258.71	.00
5591.13	25.00	258.71	5325.47	-248.98	-1246.65	1271.27	1271.27	258.71	.00
5691.13	25.00	258.71	5416.10	-257.26	-1288.10	1313.53	1313.53	258.71	.00
5791.13	25.00	258.71	5506.73	-265.53	-1329.54	1355.80	1355.80	258.71	.00
5891.13	25.00	258.71	5597.36	-273.81	-1370.98	1398.06	1398.06	258.71	.00
5991.13	25.00	258.71	5687.99	-282.09	-1412.43	1440.32	1440.32	258.71	.00
6091.13	25.00	258.71	5778.62	-290.36	-1453.87	1482.58	1482.58	258.71	.00
6191.13	25.00	258.71	5869.25	-298.64	-1495.31	1524.84	1524.84	258.71	.00
6291.13	25.00	258.71	5959.88	-306.92	-1536.76	1567.11	1567.11	258.71	.00

PAGE - 2

H004.txt

Measured Depth FT	Incl Angle Deg	Drift Direction Deg	True Vertical Depth	N-S FT	E-W FT	Vertical Section FT	CLOSURE Distance FT	CLOSURE Direction Deg	Dogleg Severity Deg/100
6391.13	25.00	258.71	6050.51	-315.19	-1578.20	1609.37	1609.37	258.71	.00
6491.13	25.00	258.71	6141.14	-323.47	-1619.64	1651.63	1651.63	258.71	.00
6591.13	25.00	258.71	6231.77	-331.75	-1661.09	1693.89	1693.89	258.71	.00
6691.13	25.00	258.71	6322.41	-340.02	-1702.53	1736.15	1736.15	258.71	.00
6791.13	25.00	258.71	6413.04	-348.30	-1743.97	1778.41	1778.41	258.71	.00
6891.13	25.00	258.71	6503.67	-356.58	-1785.42	1820.68	1820.68	258.71	.00
6991.13	25.00	258.71	6594.30	-364.86	-1826.86	1862.94	1862.94	258.71	.00
7091.13	25.00	258.71	6684.93	-373.13	-1868.30	1905.20	1905.20	258.71	.00
7191.13	25.00	258.71	6775.56	-381.41	-1909.75	1947.46	1947.46	258.71	.00
7197.61	25.00	258.71	6781.43	-381.95	-1912.43	1950.20	1950.20	258.71	.00
ND OF HOLD, BEGIN DROPPING ANGLE AT A RATE OF 2.5 DEGREES/100'.									
7227.61	24.25	258.71	6808.70	-384.39	-1924.69	1962.70	1962.70	258.71	2.50
7257.61	23.50	258.71	6836.13	-386.77	-1936.60	1974.84	1974.84	258.71	2.50
7287.61	22.75	258.71	6863.72	-389.08	-1948.15	1986.62	1986.62	258.71	2.50
7317.61	22.00	258.71	6891.46	-391.32	-1959.35	1998.04	1998.04	258.71	2.50
7347.61	21.25	258.71	6919.35	-393.48	-1970.19	2009.10	2009.10	258.71	2.50
7377.61	20.50	258.71	6947.38	-395.58	-1980.67	2019.79	2019.79	258.71	2.50
7407.61	19.75	258.71	6975.55	-397.60	-1990.80	2030.11	2030.11	258.71	2.50
7437.61	19.00	258.71	7003.85	-399.55	-2000.56	2040.06	2040.06	258.71	2.50
7467.61	18.25	258.71	7032.28	-401.42	-2009.95	2049.64	2049.64	258.71	2.50
7497.61	17.50	258.71	7060.83	-403.23	-2018.98	2058.85	2058.85	258.71	2.50
7527.61	16.75	258.71	7089.50	-404.96	-2027.64	2067.69	2067.69	258.71	2.50
7557.61	16.00	258.71	7118.29	-406.61	-2035.94	2076.14	2076.14	258.71	2.50
7587.61	15.25	258.71	7147.18	-408.19	-2043.86	2084.22	2084.22	258.71	2.50
7617.61	14.50	258.71	7176.17	-409.70	-2051.41	2091.93	2091.93	258.71	2.50
7647.61	13.75	258.71	7205.26	-411.14	-2058.59	2099.25	2099.25	258.71	2.50
7677.61	13.00	258.71	7234.45	-412.50	-2065.40	2106.19	2106.19	258.71	2.50
7707.61	12.25	258.71	7263.72	-413.78	-2071.83	2112.74	2112.74	258.71	2.50
7737.61	11.50	258.71	7293.08	-414.99	-2077.88	2118.92	2118.92	258.71	2.50
7767.61	10.75	258.71	7322.52	-416.12	-2083.56	2124.71	2124.71	258.71	2.50
7797.61	10.00	258.71	7352.03	-417.18	-2088.86	2130.11	2130.11	258.71	2.50
7827.61	9.25	258.71	7381.61	-418.16	-2093.78	2135.12	2135.12	258.71	2.50
7857.61	8.50	258.71	7411.25	-419.07	-2098.31	2139.75	2139.75	258.71	2.50
7887.61	7.75	258.71	7440.94	-419.90	-2102.47	2143.99	2143.99	258.71	2.50
7917.61	7.00	258.71	7470.70	-420.65	-2106.25	2147.84	2147.84	258.71	2.50
7947.61	6.25	258.71	7500.50	-421.33	-2109.64	2151.30	2151.30	258.71	2.50
7977.61	5.50	258.71	7530.34	-421.93	-2112.65	2154.37	2154.37	258.71	2.50
8007.61	4.75	258.71	7560.22	-422.46	-2115.28	2157.05	2157.05	258.71	2.50
8037.61	4.00	258.71	7590.13	-422.91	-2117.53	2159.34	2159.34	258.71	2.50
8067.61	3.25	258.71	7620.07	-423.28	-2119.39	2161.24	2161.24	258.71	2.50
8097.61	2.50	258.71	7650.03	-423.57	-2120.86	2162.74	2162.74	258.71	2.50
8127.61	1.75	258.71	7680.01	-423.79	-2121.95	2163.86	2163.86	258.71	2.50

Measured Depth FT	Incl Angle Deg	Drift Direction Deg	True Vertical Depth	N-S FT	E-W FT	Vertical Section FT	CLOSURE Distance FT	CLOSURE Direction Deg	Dogleg Severity Deg/100
8157.61	1.00	258.71	7710.00	-423.93	-2122.66	2164.58	2164.58	258.71	2.50
8187.61	.25	258.71	7740.00	-424.00	-2122.98	2164.90	2164.90	258.71	2.50

END OF DROP, RETURN TO VERTICAL AT CANYON DOLOMITE TOP (7750' TVD), AT A BHL OF 660' FNL & 1980' FEL, SECTION
3 T22S-R23E


8197.61	.00	258.71	7750.00	-424.00	-2123.00	2164.93	2164.93	258.71	2.50
8297.61	.00	258.71	7850.00	-424.00	-2123.00	2164.93	2164.93	258.71	.00
8397.61	.00	258.71	7950.00	-424.00	-2123.00	2164.93	2164.93	258.71	.00
8497.61	.00	258.71	8050.00	-424.00	-2123.00	2164.93	2164.93	258.71	.00
8597.61	.00	258.71	8150.00	-424.00	-2123.00	2164.93	2164.93	258.71	.00
8697.61	.00	258.71	8250.00	-424.00	-2123.00	2164.93	2164.93	258.71	.00
8747.61	.00	258.71	8300.00	-424.00	-2123.00	2164.93	2164.93	258.71	.00

END WELL AT 8300' TVD AT BHL LISTED ABOVE.

Company: Yates Petroleum Corporation

Lease/Well: HOC Federal #4

Location: Surf. Section 18 T22S-R24E, 236' N & 143' W, BHL: Sec. 13 T22S-R24E

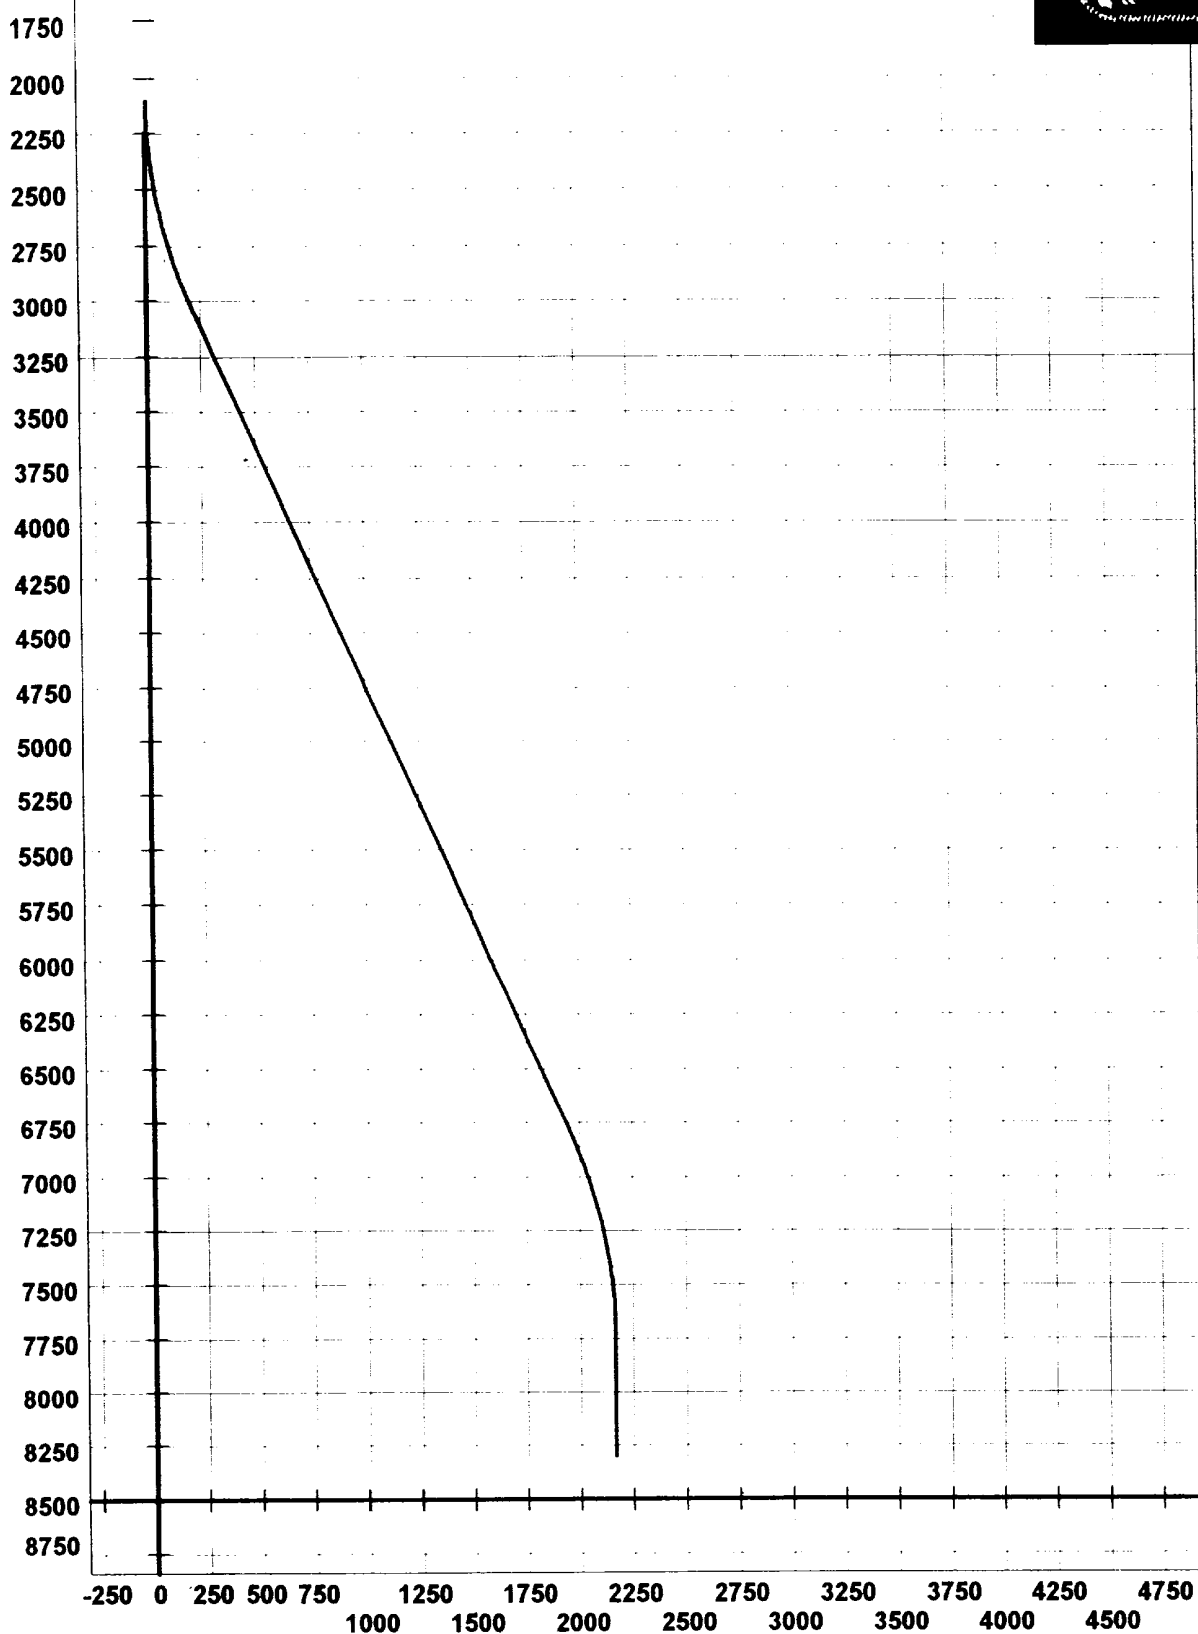


○ — △ — ▽ —

Company: Yates Petroleum Corporation

Lease/Well: HOC Federal #4

Location: Surf: Section 18 T22S-R24E, 236' N & 143' W, BHL: Sec. 13 T22S-R23E, 660' N & 1,980' E

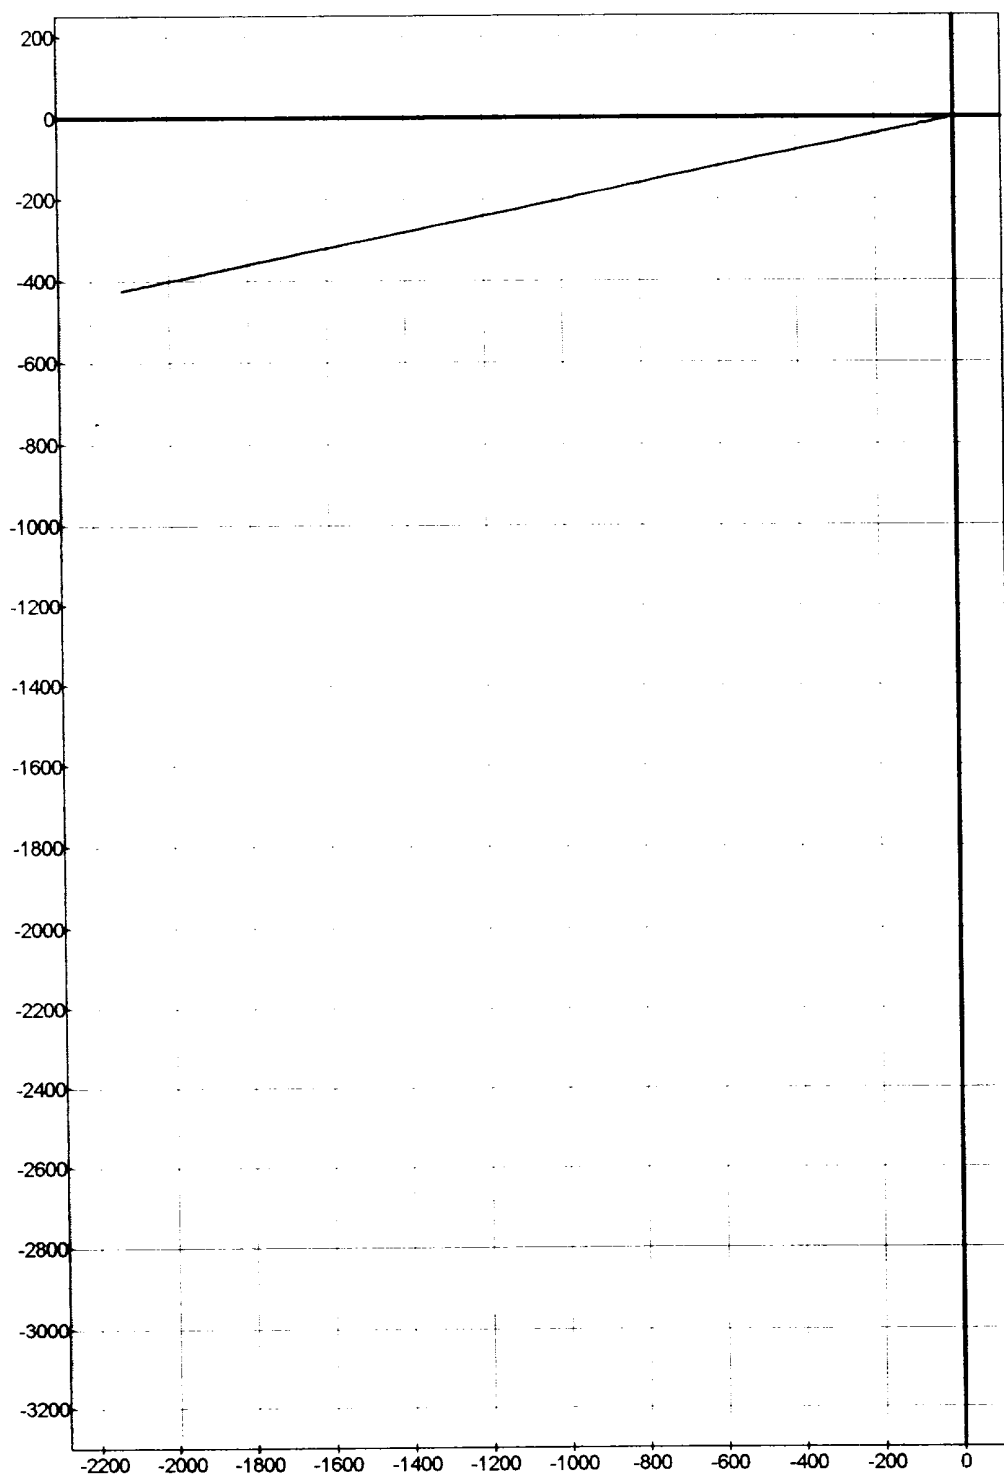

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well ☐ Oil Well ☒ Gas Well ☐ Other		5. Lease Serial No. NM-063073
2. Name of Operator Yates Petroleum Corporation		6. If Indian, Allottee or Tribe Name
3a. Address 105 South Fourth Street, Artesia, NM 88210	3b. Phone No. (include area code) (505) 748-1471	7. If Unit or CA/Agreement, Name and/o
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) 236' FNL and 143' FWL Section 18, T22S-R24E Surface Location 1980' FNL and 1980' FEL Section 13, T22N-R23E Bottom Hole Location		8. Well Name and No. HOC Federal Com. #4
		9. API Well No.
		10. Field and Pool, or Exploratory Area Indian Basin Upper Penn
		11. County or Parish, State Eddy County, New Mexico

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
☒ Notice of Intent	☐ Acidize	☐ Deepen	☐ Production (Start/Resume)	☐ Water Shut-Off
☐ Subsequent Report	☐ Alter Casing	☐ Fracture Treat	☐ Reclamation	☐ Well Integrity
☐ Final Abandonment Notice	☐ Casing Repair	☐ New Construction	☐ Recomplete	☒ Other Proposed
	☐ Change Plans	☐ Plug and Abandon	☐ Temporarily Abandon	Powerline and
	☐ Convert to Injection	☐ Plug Back	☐ Water Disposal	facilities.

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recomplate in a new interval, a Form 3160-4 shall be filed once Testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Yates Petroleum Corporation wishes to amend the surface use plan for the captioned to include:
One four inch X-42 buried, steel, natural gas pipeline approx. 5500 feet in length following existing right-of-way NM-94290 to the HOC Federal Com. #2 Battery located 330' FNL and 330' FEL of Section 3, T22S-R23E.
Also wish to run approx. 200 feet of 460 volt, three phase, raptor proof powerline to tie into the existing powerline running along the northside of the well location.

Thank you.


14. I hereby certify that the foregoing is true and correct	
Name (Printed/Typed) Cy Cowan	Title Regulatory Agent
Signature 	Date April 2, 2001

THIS SPACE FOR FEDERAL OR STATE USE

Approved by 	Title FIELD MANAGER	Date APR 27 2001
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office CARLSBAD FIELD OFFICE

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

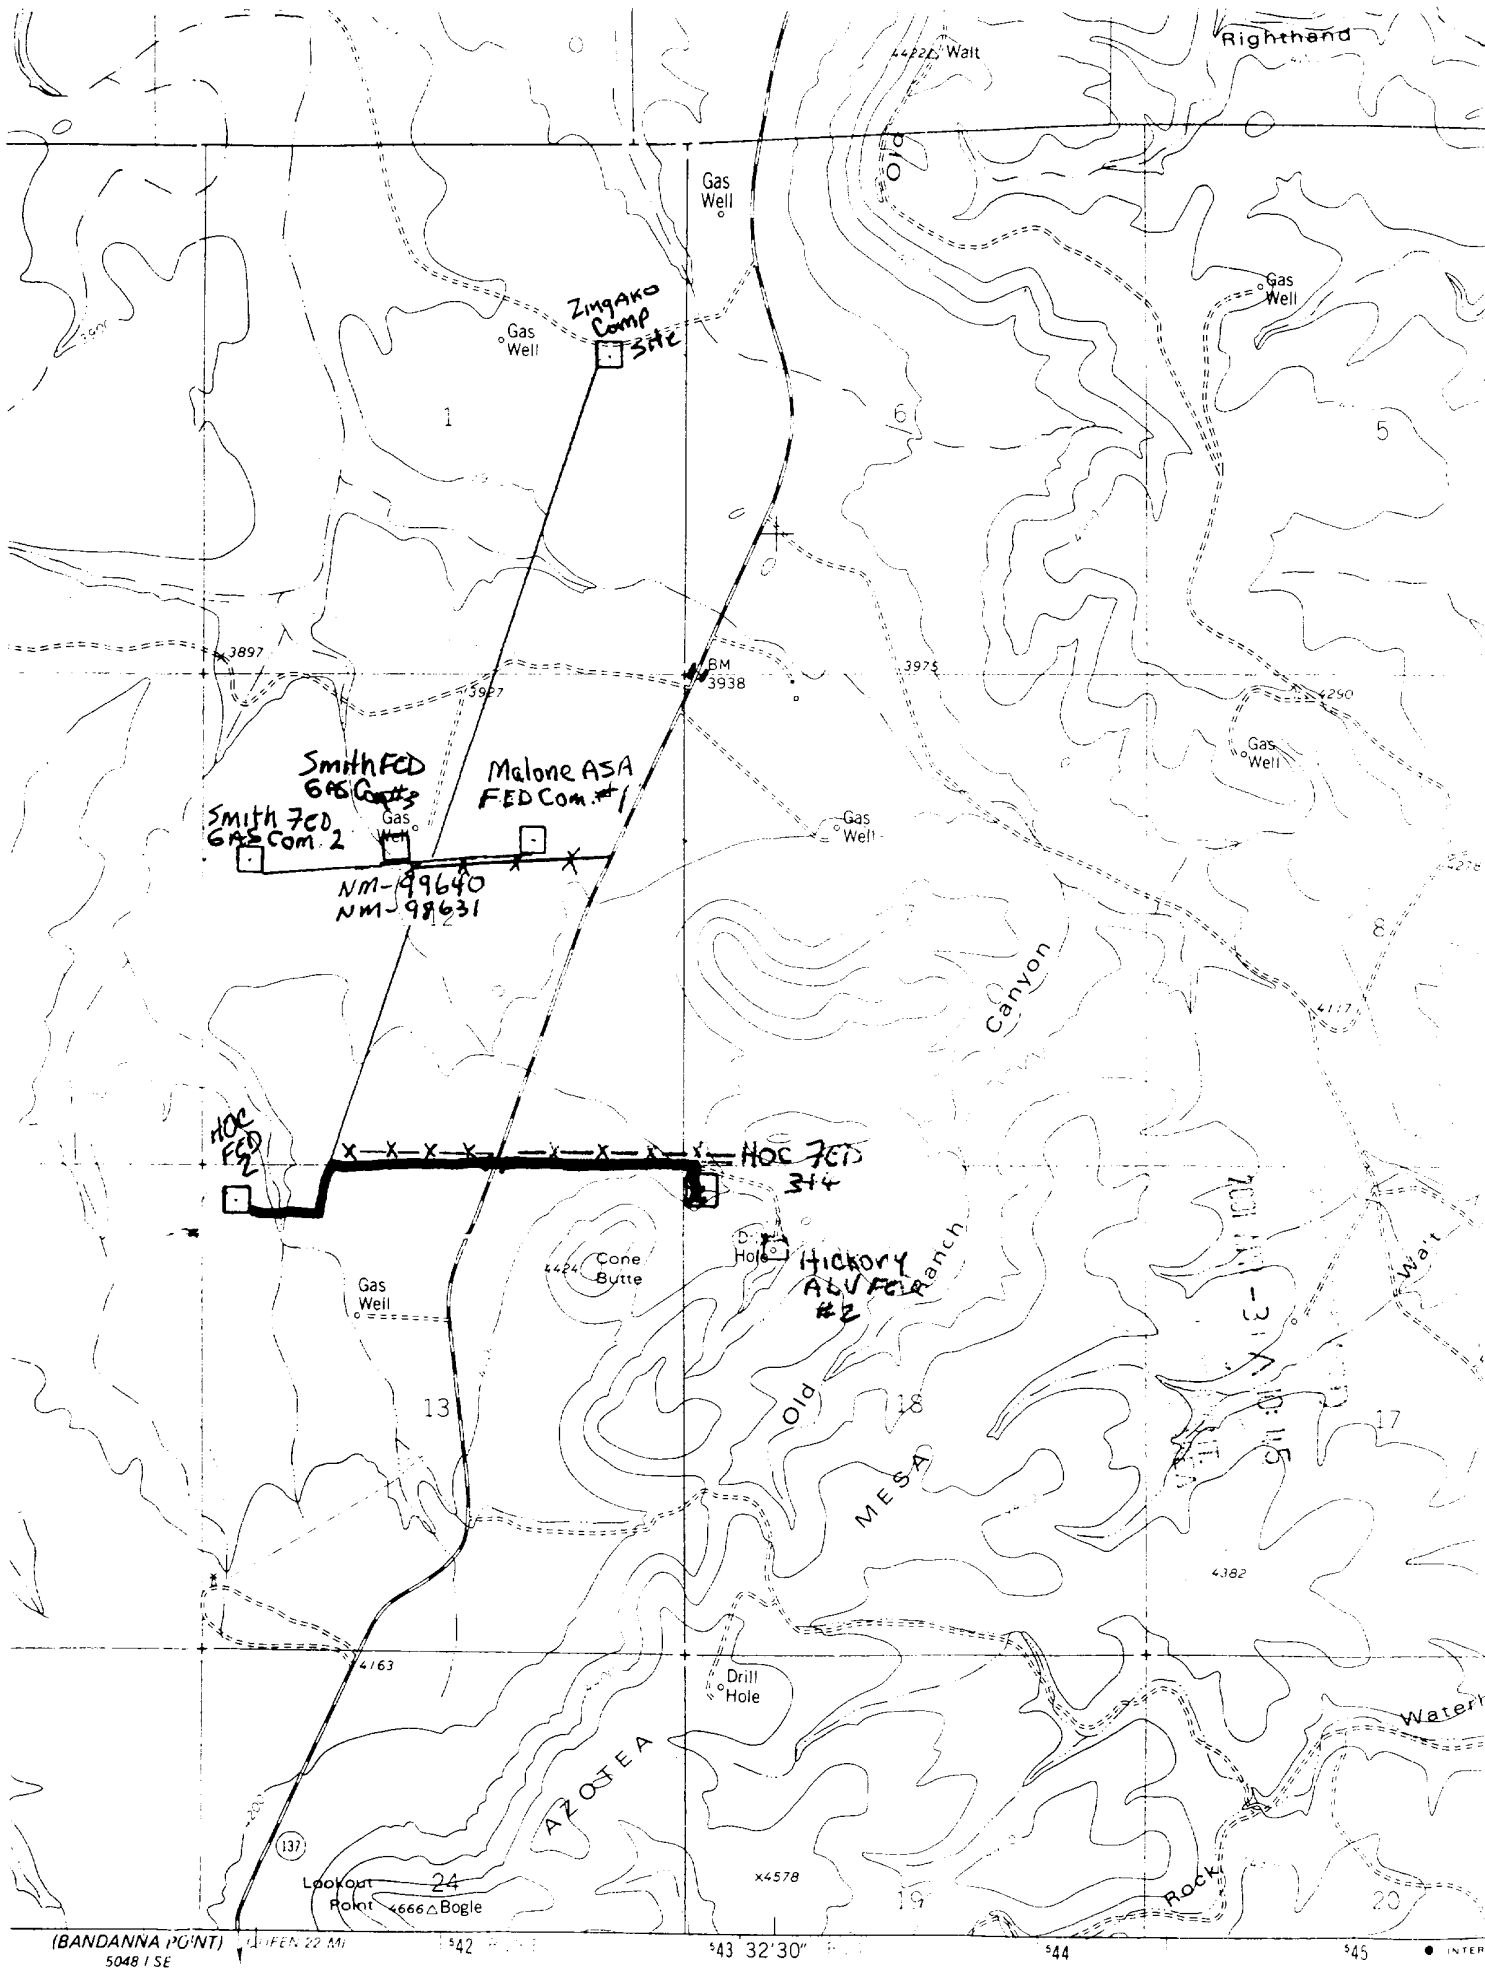

(BANDANNA POINT)
5048 I SE

11 IFEN 22 MI

542

543 32'30"

544

545

• INTER

