

TIMBER//SHARP DRILLING

B.O.P. Equipment Intended for use on Rig # 24 + 22

Well To Be drilled for Timber/Sharp

'All B.O.P equipment is H2S Trim'

'All Accumulators are Kookey Type-80 : Dual Power Electric/Air'

'Choke Manifold: * See sheet 2'

4" Valves : Cameron F/FC, Shaffer DB Hydraulic

2" Check Valve: Cameron Type R

2" Valves : Cameron or Shaffer

Annular Shaffer Type: Spherical

Annular PSI: 3000

(If Shaffer: Spherical , If Hydril: Type GK)

BOP Type Shaffer LWS

(If Shaffer: LWS or SL, If Cameron: Type U)

BOP Size: 13 5/8" - 5000 PSI

Rotating Head Type Smith

Rot-Head Furnished By Timber


Rams in top gate: 4 1/2" pipe

Rams in bottom: Blinds

Side Outlets used:

Bottom X Top

4" Valves on Tee

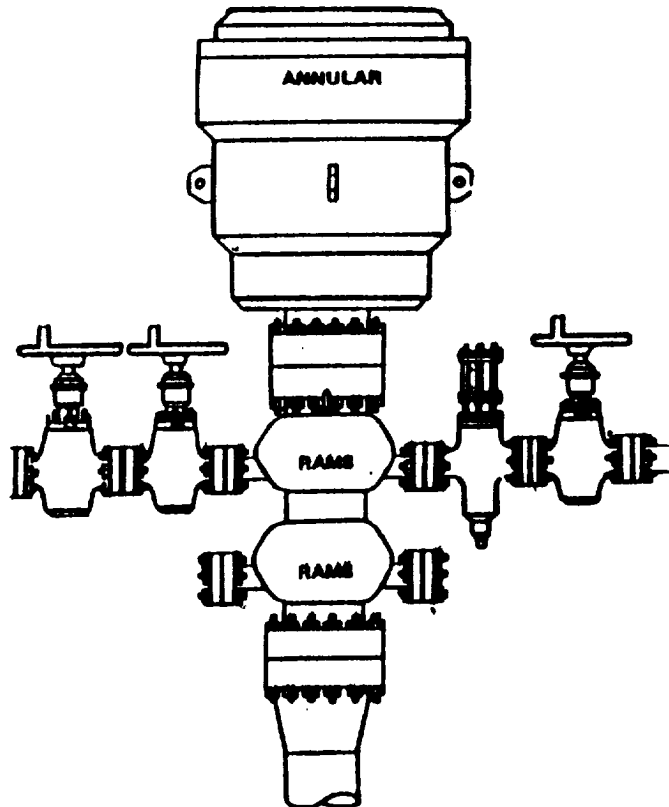

B.O.P. Equipment Intended for use on Rig # 24 + 22

Well To Be drilled for Timber/Sharp

'All Valves (H2S)'

Choke Manifold:

Pressure Rating 3,000 or 5,000 (as Req.)

1 - 4" Valves

2 - 2" Valves

2 - 2" Adjustable Chokes

Valve Types Used:

Cameron - F or FC

Shaffer - B Floseal

WKM - type 2

Chokes - Cameron H2 or TC unbolt

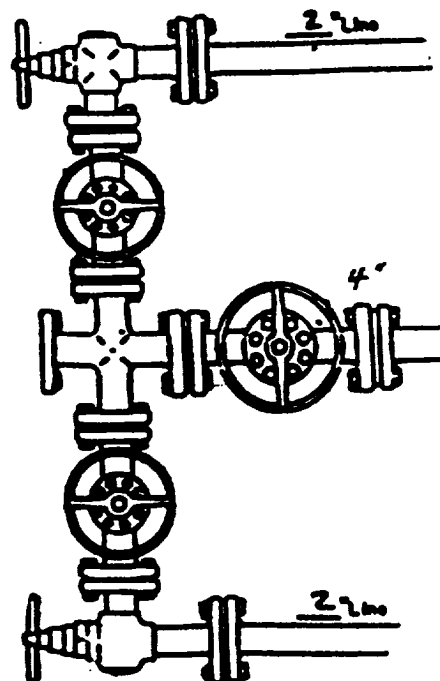


EXHIBIT "E"
CHI OPERATING, INC.
McIver Federal, Well No. 1
BOP Specifications