


(SUBMIT IN TRIPLICATE)

Land Office \_\_\_\_\_

Lease No. **NM-03814-A**

Unit **"O"**

Co. Loc. **PR-63-120-58**

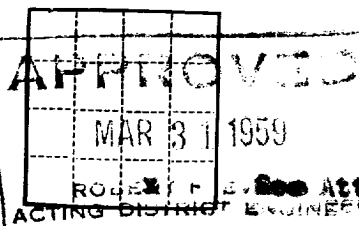

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

**SUNDRY NOTICES AND REPORTS ON WELLS**

NOTICE OF INTENTION TO DRILL	<input checked="" type="checkbox"/>	SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF		SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE		SUBSEQUENT REPORT OF ABANDONMENT	
NOTICE OF INTENTION TO PULL OR ALTER CASING		SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

**Bandana Point Unit**

**March 25, 1959**

Well No. **1** is located **750** ft. from **S** line and **1900** ft. from **E** line of sec. **13**

**SW/4 SE/4 13**

**23-S**

**23-E**

(1/4 Sec. and Sec. No.)

(Twp.)

(Range)

(Meridian)

**Wildcat**

**Eddy**

**New Mexico**

(Field)

(County or Subdivision)

(State or Territory)

The elevation of the derrick floor above sea level is **later** ft.

**DETAILS OF WORK**

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

**CASING PROGRAM**

**CEMENTING RECORD**

**COMING PROGRAM**

Size	Wt.	Depth	
16"	75#	40'	Circulate to surface
10-3/4	40.5	2200	Circulate to 16" csg.
8-5/8	32	6000	(Use sufficient volume of cnt. to bring 1 Wolfcamp 6500-6600
5 1/2	17	12,700	(back cnt. to at least 800' above shoe. 3 Cisco, Canyon,

Halliburton method of cementing to be used.  
Proposed total depth 12,700' to test Ellenburger.  
Note: Air drilling to be employed for surface drilling unless prohibited by excessive water in hole. Air drilling to be resumed below surface csg. to 6000' or top of the Dean. 8-5/8" csg. to be run only if necessary. Minimum fresh water mud for samples from 6000' to TD.

4 bones springs 2900-3550  
2 Bend 9000-9350  
1 Devonian 10,800-50

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company **Humble Oil & Refining Co.**

Address **Box 1800**

**Midland, Texas**

By \_\_\_\_\_

Title **Asst. Div. Chief Clerk**