


RECEIVED
JUL 1 1952

Oil Cons. Comm.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

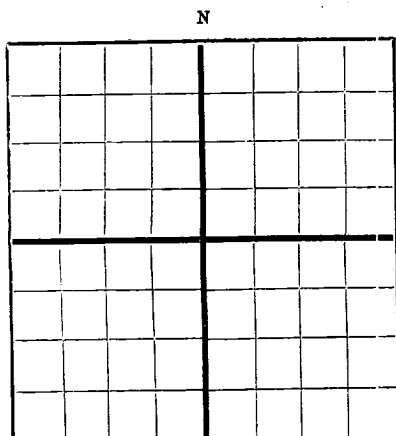

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

~~Del Rio~~ Agricultural Association, Inc. 306 Lubbock Natl. Bldg.
Company of Operator Address
James C. Lencrum Unit Well No. 1 in 12 1/4, 12 1/4, 12 1/4 Sec. 13, T. 24 N.
R. 28 E., N. M. P. M., Hidalgo County, Texas
Well is 330 feet south of the North line and 2310 feet west of the East line of Section 13
If State land the oil and gas lease is No. Not Assignment No. Not
If patented land the owner is Robert F. Jones & Anna P. Lencrum Address Hidalgo, New Mexico
If Government land the permittee is Not Address
The Lessee is Del Rio Agricultural Association, Inc. Address Lubbock, Texas
Drilling commenced 6-16-1952 Drilling was completed July 5 1952
Name of drilling contractor S. A. L. Drilling Company Address Midland, Texas
Elevation above sea level at top of casing 2970 feet.
The information given is to be kept confidential until Not 19

OIL SANDS OR ZONES

No. 1, from None to No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 200 to 225 feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM	TO	PURPOSE
8 5/8	28	8rc	Metl	214	Howco				Surface
5 1/2	14	8rc	Metl	2728	Howco				Oil string

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
12 1/4	8 5/8	14	200	Halliburton Foam		Cemented
7 7/8	5 1/2	2728	125	Halliburton Foam		Cemented

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
None						

Results of shooting or chemical treatment Dry Hole

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 2729 feet, and from feet to feet
Cable tools were used from 2729 feet to 2910 feet, and from feet to feet

PRODUCTION

Put to producing Dry Hole, 19
The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be.
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas.
Rock pressure, lbs. per sq. in.

EMPLOYEES

G. A. Taylor, Driller W. T. Lurkin, Driller
H. Brent, Driller L. E. Lurkin, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 16th day of July, 1952
Notary Public
My Commission expires June, 1953
Lubbock, Texas 7-15-52
Name [Signature]
Position Supt.
Representing Del Rio Agricultural Assn., Inc.
Company or Operator
Address 306 Lubbock Natl. Bldg.
Lubbock, Texas

