


1. THE UNITED STATES OF AMERICA
 2. THE UNITED STATES OF AMERICA
 3. THE UNITED STATES OF AMERICA

THE VALVE IS TO HAVE AT LEAST ONE INCH TO CONTROL PRESSURE. THE 4" VALVE TO BE INSTALLED IN LINE OF THE 4" LINE AND NOT REMOTELY FROM MAIN LINE. THE MASTER VALVE IS TO BE INSTALLED AT THE HEAD OF THE CHUCK IS TO BE AVAILABLE. IT SHALL BE EITHER POSITIVE OR NEGATIVE.

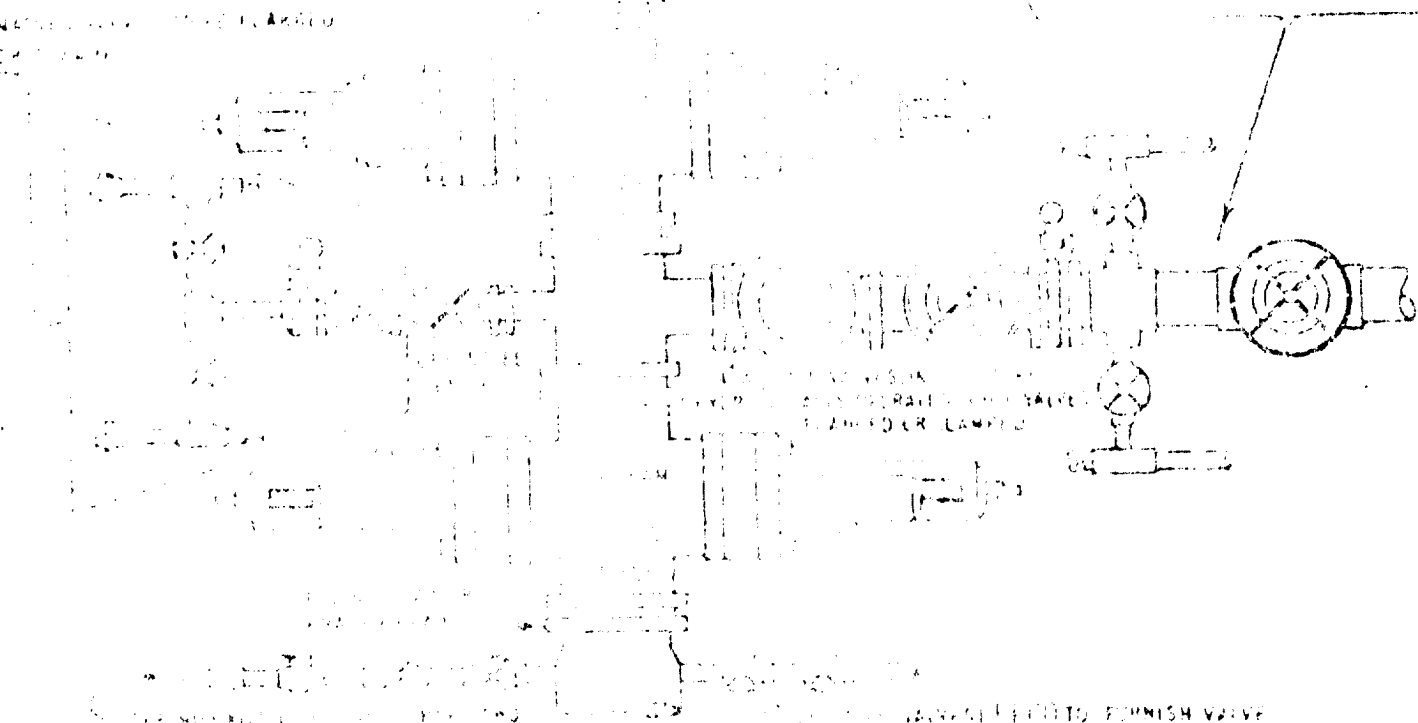

ALL INFORMATION CONTAINED HEREIN IS UNCLASSIFIED
DATE 08-29-2007 BY 60322 UCBAW/SJS

1. CONTRACT TO FURNISH VALVE
2. CONTRACT TO FURNISH VALVE

FORMER CLASSIFICATION: CONTINUUM OF VIOLENCE PREVENTER REQUIREMENTS

[illegible]

11. CLASIFICACIÓN DE LAS CÉLULAS