


November 22, 1983

State of New Mexico  
Energy & Minerals Dept.  
Oil Conservation Commission  
P.O. Box 2088  
Santa Fe, NM 87501

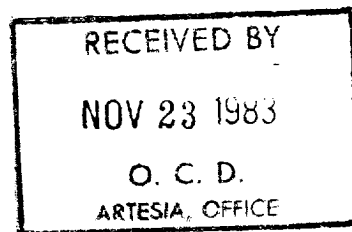

Attn: Mr. Mike Stogner

Attached is schematic drawing of the wellbore on our Mayer Federal Com. Well No. 1. We set a permanent packer at 11,200' and stung into it with 2-3/8" & 2-7/8" tubing. This leaves the packer setting 1516' above the top perforation which is at 12,716'. This was done in order that we might recomplete to Strawn & Wolfcamp Zones when the Atoka Zone is depleted, without having to pull the tubing.

We respectfully request an exception to Rule 107 (d) (3) in order that we may produce and deplete the Atoka Zone and recomplete to higher zones without having to load hole with fluid and pull tubing.

If additional information is required, please advise.

Yours very truly,

*G. E. Tate*  
mz

G. E. Tate  
Division Operations Superintendent

WCM/stp

Mayer Federal Com. No. 1  
 Wildcat (Atoka) Field  
 Section 26, T24S, R29E  
 Eddy County, New Mexico

