

NM OIL & GAS COMMISSION

Form Approved.
Budget Bureau No. 47-R1424

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ gas ☐ other ☒ Water Source Well

2. NAME OF OPERATOR

Amoco Production Company

3. ADDRESS OF OPERATOR

P. O. Box 68, Hobbs, New Mexico 88240

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)

AT SURFACE: 2160' FSL X 1960' FEL

AT TOP PROD. INTERVAL: (Unit J, NW/4, SE/4)

AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐

SUBSEQUENT REPORT OF:

(other) status update ☐

5. LEASE

NM-0415688-A

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Old Indian Draw Unit

9. WELL NO.

37

10. FIELD OR WILDCAT NAME

Indian Draw Delaware

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

18-22-28

12. COUNTY OR PARISH | 13. STATE


Eddy

NM

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)
3084.1' GL

(NOTE: Report results of multiple completion or change on Form 9-330.)

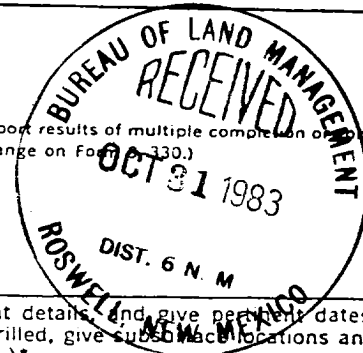

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Moved in service unit 10-18-83. POH with 2-7/8" tubing and electric submersible pump. Ran 7" Baker full bore packer and 2-7/8" tubing. Set packer at 2416'. Swabbed 14 hrs. and recovered 345 BW. Released packer and POH with packer and tubing. Ran in hole with submersible pump and 2-7/8" tubing. Landed pump at 2492'. Moved out service unit 10-22-83. Conducted draw down test 10-22-83. Currently, shut-in evaluating.

0+6-BLM, R 1-HOU, R. E. Ogden, Rm 21.150 1-F. J. Nash, HOU Rm 4.206 1-CMH

Subsurface Safety Valve: Manu. and Type

Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED

Charles M. Loring

TITLE Admin. Analyst

DATE

10-27-83

(This space for Federal or State office use)

APPROVED BY

TITLE

DATE

ACCEPTED FOR RECORD

CONDITIONS OF APPROVAL, IF ANY:

NOV 1 1983