

Submit 3 Copies To Appropriate District Office  
District I  
1625 N. French Dr., Hobbs, NM 87240  
District II  
811 South First, Artesia, NM 87210  
District III  
1000 Rio Brazos Rd., Aztec, NM 87410  
District IV  
2040 South Pacheco, Santa Fe, NM 87505

State of New Mexico  
Energy, Minerals and Natural Resources  
OIL CONSERVATION DIVISION  
2040 South Pacheco  
Santa Fe, NM 87505

Form C-103  
Revised March 25, 1999

WELL API NO. <b>30 - 015 - 24592</b>
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. <b>L - 654</b>
7. Lease Name or Unit Agreement Name: <b>New Mexico "DI" State</b>
8. Well No. <b>2</b>
9. Pool name or Wildcat <b>Dark Canyon Delaware, West</b>

**SUNDRY NOTICES AND REPORTS ON WELLS**  
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well:  
Oil Well ☒ Gas Well ☐ Other

2. Name of Operator  
**Nadel and Gussman Permian, L.L.C. / #155615**

3. Address of Operator  
**601 N Marienfeld, Suite 508, Midland, Texas 79701**

4. Well Location  
Unit Letter: **D** : **660'** feet from the **North** line and **660'** feet from the **West** line  
Section **19** Township **23 S** Range **26 E** NMPM **Eddy** County

1. Elevation (Show whether DR, RKB, RT, GR, etc.)  
**3439' GL**

**11. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data**

**NOTICE OF INTENTION TO:**

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒

TEMPORARILY ABANDON ☐ CHANGE PLANS ☐

PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐

OTHER:

**SUBSEQUENT REPORT OF:**

REMEDIAL WORK ☐ ALTERING CASING ☐

COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐

CASING TEST AND CEMENT JOB ☐  
OTHER: ☐

Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103.

1. RU wireline. Set CIBP at 4650' and cap with 35' cement by bailer. Place 100' Plug 2350' to 2450'  
2. Load hole with 10 PPG salt gel mud. TIH and spot ~~25~~ plug across 10 3/4" surface casing shoe from 1600' to 1650'. WOC and tag plug.  
3. Cut off wellhead and spot ~~15~~ cement at surface: ~~60~~ in casing, ~~60~~ in annulus.  
4. Set dry hole marker. Clean location and pick up flowline.

Notify OCD 24 hrs. prior to any work done

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE [Signature] TITLE **Operations Engineer** DATE **9-20-01**

Type or print name **Robert McNaughton** Telephone No. **915 - 682 - 4429**  
(This space for State use)

APPROVED BY [Signature] TITLE [Signature] DATE **10-19-01**  
Conditions of approval, if any:

# MADEL AND GUSSMAN PERMIA

## New Mexico "DI" State No. 2

660' FNL, 660' FWL, Unit D, Sec 19, 23S, 26E, Eddy County, NM

API # 30-015-24592


Elev: 3439' GL

### Recommended P&A

10-3/4", 51#, K-55 @ 1455'  
2000 sx, circulated  
14-3/4" hole

DV Tool at 2400'  
700 sx, TOC @ 70' by temp

5-1/2", 15.5#, K-55 @ 5208'  
750 sx, TOC @ DV tool  
7-7/8" Hole

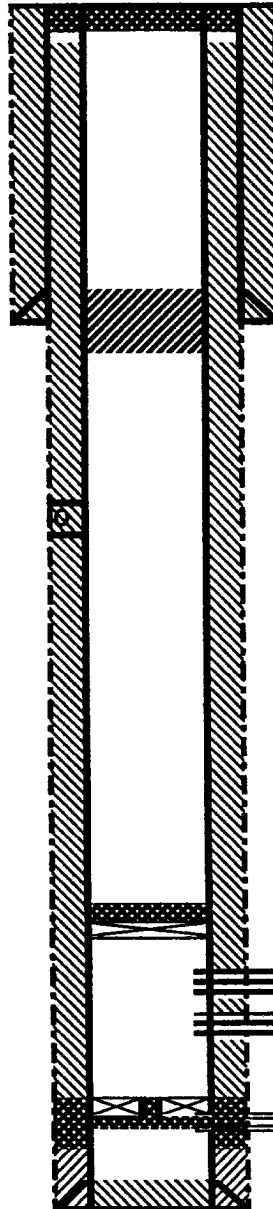

Spot 15 sx at surface:  
8 sx in casing, 7 sx in annulus.



Spot 25 sx across surface shoe  
1350' to 1600'



CIBP @ 4650' w/ 35' cement



Delaware Perfs: 4702' - 4710'

Delaware Perfs: 4778' - 4790'

@ 2 SPF, 42 holes, 1500 15%, 32/34 foam frac

SQZD Perfs at 4870', communicated  
Retainer at 4839' w/ 300 sx

PDTD @ 4800'  
TD @ 5208'

Operator Nadel & Gussner Perma. LLC  
Well Newman 10 DI #2  
Unit D Section 19 Township 23 Range 26  
API # 30 - 015 - 24592

TOPS

Del. 1200

70' → ← 60' surface Plug

TOC Temp Sug.

10 3/4  
1445'  
Circ

← shoe: Delaware Plug 1150' to 1600' TAG

2400' → DV TOOL ← 100' Plug 2350 to 2450'

4650 ← CIAP w/ 35' cement

4702' → Perfs  
4790'

5 1/2  
5208'

- Salt gel mud consisting of 10# brine with 25# of gel per barrel must be placed between each plug
- Install Dry Hole Marker
- Notify OCD 24 hrs. prior to any work done