

C/S 7

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ gas ☒
well well other

2. NAME OF OPERATOR

W. A. Moncrief, Jr.

3. ADDRESS OF OPERATOR

400 Metro Bldg., Midland, Texas 79701

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)

AT SURFACE:

AT TOP PROD. INTERVAL: 1907' FNL & 553' FEL Sec. 22

AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

SUBSEQUENT REPORT OF:

TEST WATER SHUT-OFF ☐

FRACTURE TREAT ☐

SHOOT OR ACIDIZE ☐

REPAIR WELL ☐

PULL OR ALTER CASING ☐

MULTIPLE COMPLETE ☐

CHANGE ZONES ☐

ABANDON* ☐

(other) Casing tests and cement jobs

5. LEASE

NM 29203

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Guadalupe Federal

9. WELL NO.

1

10. FIELD OR WILDCAT NAME

Baldridge Canyon Morrow

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

Section 22, T24S, R24E

12. COUNTY OR PARISH

Eddy

13. STATE


New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)

4643 Gd, 4660.5 KB

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

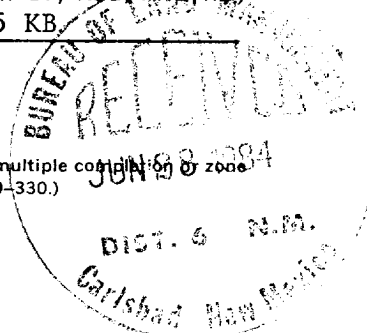

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

(1) Operator spudded 17-1/2" hole at 10 am 6-11-84 and lost returns at 239' on 6-12-84 and dry drilled to 420'. (2) Operator set 13-3/8" 54.5# casing at 418' and cemented w/400 sx Class "C" w/2% CaCl. PD at 5 pm 6-12-84. Cement did not circulate. Operator ran 1" tubing down annulus and tagged top of cement at 371'. Operator cemented down annulus with an additional 1085 sx of Class "C" cement w/2 to 4% CaCl + 49.38 bbls of Flo-check + 11 yards of pea gravel + 4 yards of Redi-Mix in 27 stages to bring cement back to the surface from 6-12-84 thru 6-16-84. Cement job was witnessed by Federal employees. WOC 12 hrs. Tested casing to 1000# for 20 minutes. Held ok. (3) Operator lost all returns at 1120' and dry drilled to 3000'. (4) Operator set 8-5/8" 28# JE casing at 2999' and cemented w/800 sx Howco lite with 1/4# Flo-cel per sack + 200 sx Class "C" w/2% CaCl. PD 2:15 pm 6-20-84. Cement did not circulate. WOC for 7-1/4 hrs and ran temperature survey. Found top of cement at 1320'. Tagged top of cement at 1324' w/1" tubing. (5) Operator cemented down annulus thru 1" tubing with 700 sx Class "C" w/4% CaCl in 10 stages and cement circulated. Job was witnessed by Federal man. WOC 18 hrs. Tested casing and BOP to 1000# for 30 minutes. Held ok.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Dewey E. Sheraton

TITLE Exploration Manager

DATE 6-25-84

ACCEPTED FOR RECORD

(This space for Federal or State office use)

APPROVED BY AWP

TITLE _____

DATE _____

CONDITIONS OF APPROVAL, IF ANY:

JUN 29 1984

Carlsbad

NEW MEXICO *See Instructions on Reverse Side