


# DIVERTER SYSTEM DESIGN

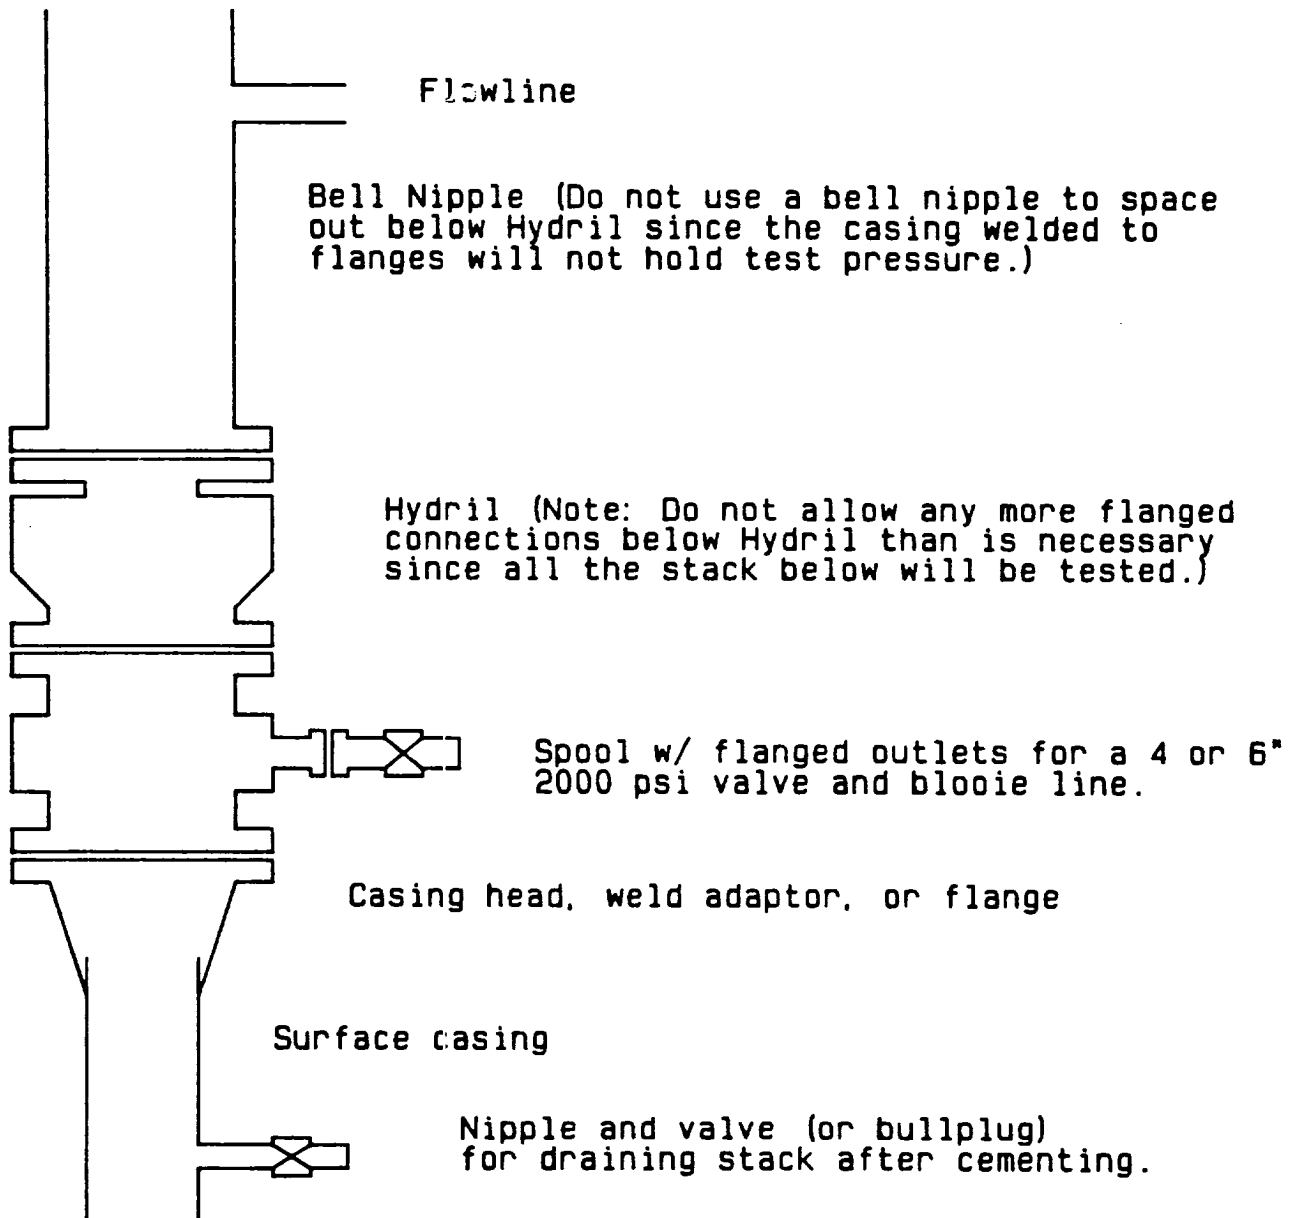

Note: If a spool is not used between the casing head and the Hydril, the outlet can be constructed so as to come out of the surface casing. In this case, cut off the surface casing at about five feet above ground level for the outlet to come out two or three feet above ground level.