


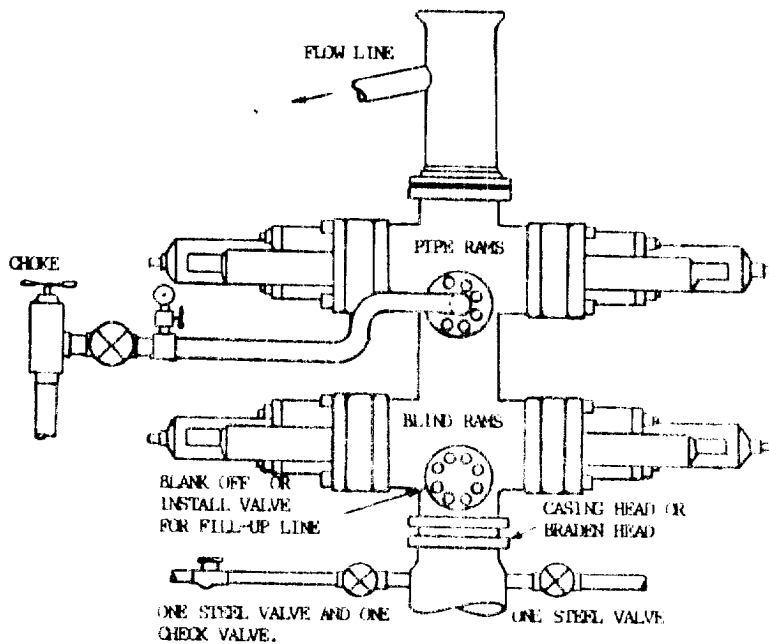

THE FOLLOWING CONSTITUTE MINIMUM BLOWOUT PREVENTER REQUIREMENTS


- A. One double gate blowout preventer with lower ram blind and upper rams for pipe, all hydraulically controlled.
- B. Opening on preventers between rams to be flanged, studded or clamped and at least two inches diameter.
- C. All connections from operating manifold to preventers to be all steel hose or tube a minimum of one inch in diameter.
- D. The available closing pressure shall be at least 15% in excess of that required with sufficient volume to operate (close, open, and re-close) the preventers.
- E. All connections to and from preventers to have a pressure rating equivalent to that of the BOP's.
- F. Manual controls to be installed before drilling cement plug.
- G. Valve to control flow through drill pipe to be located on rig floor.
- H. Choke may be either positive or adjustable. Choke spool may be used between rams.

BOPCO 12

ONE HYDRAULIC DUAL BLOWOUT PREVENTER

BASS 10 FEDERAL No. 5
EDDY COUNTY, NEW MEXICO

SDS 4/17/85

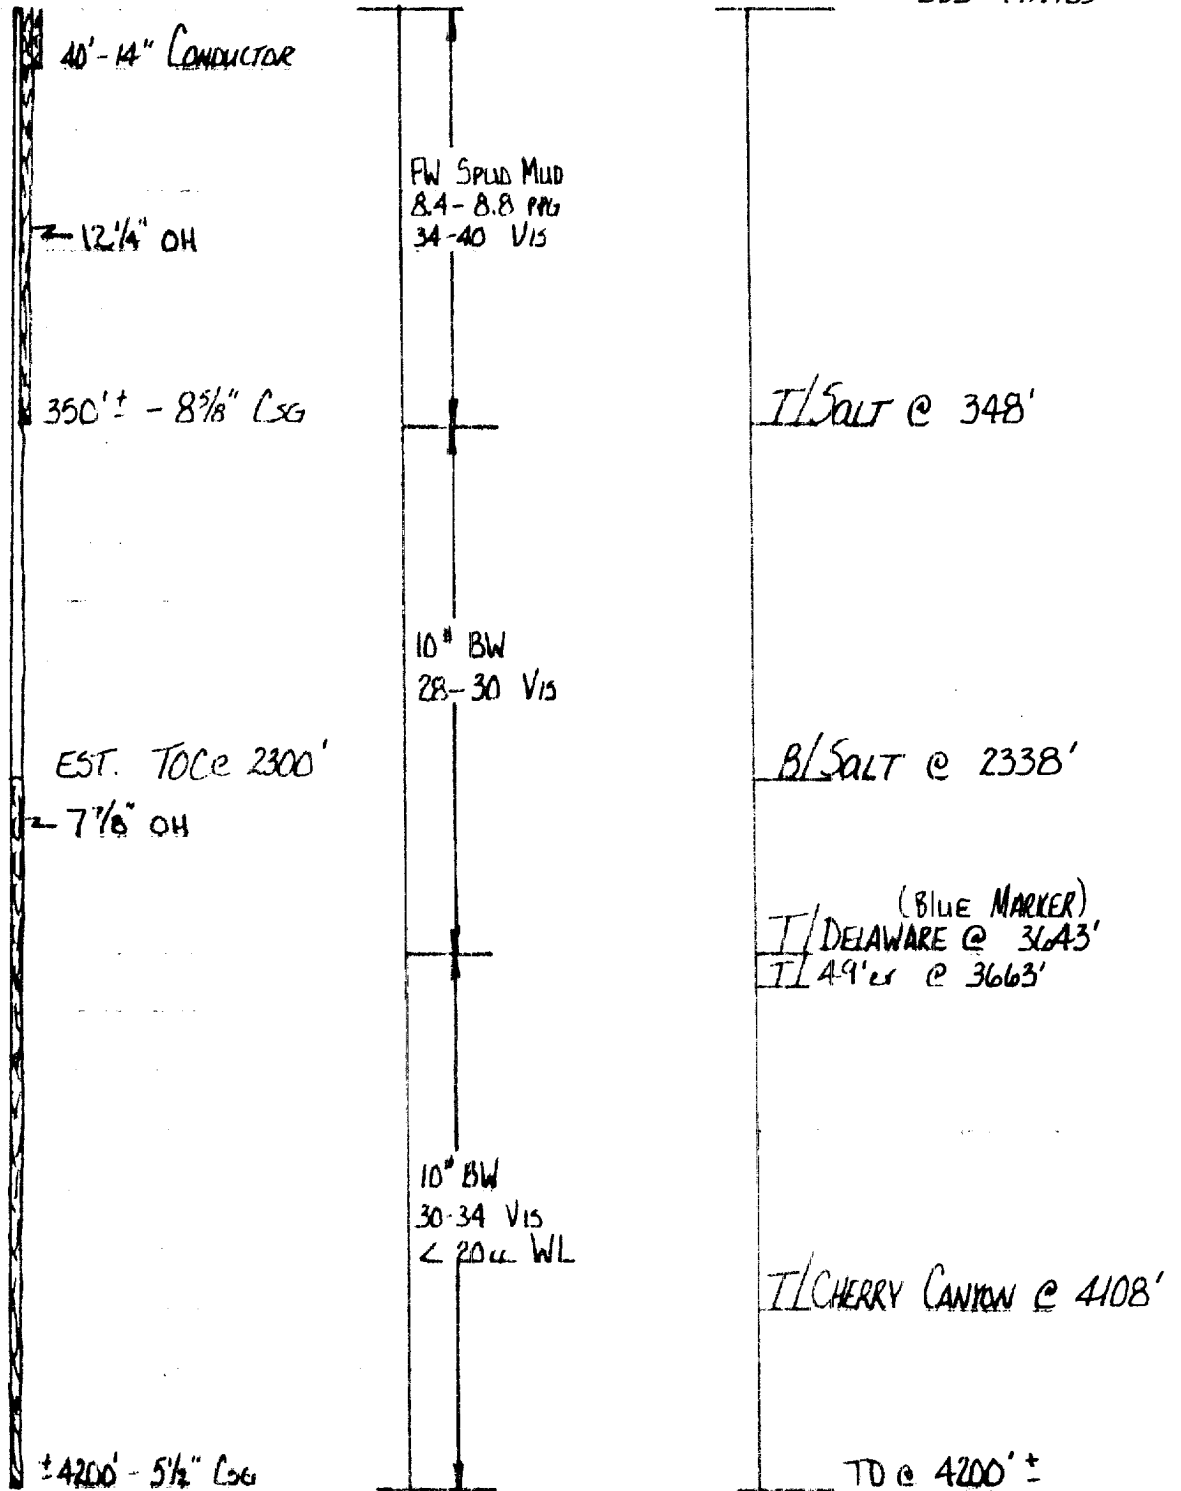

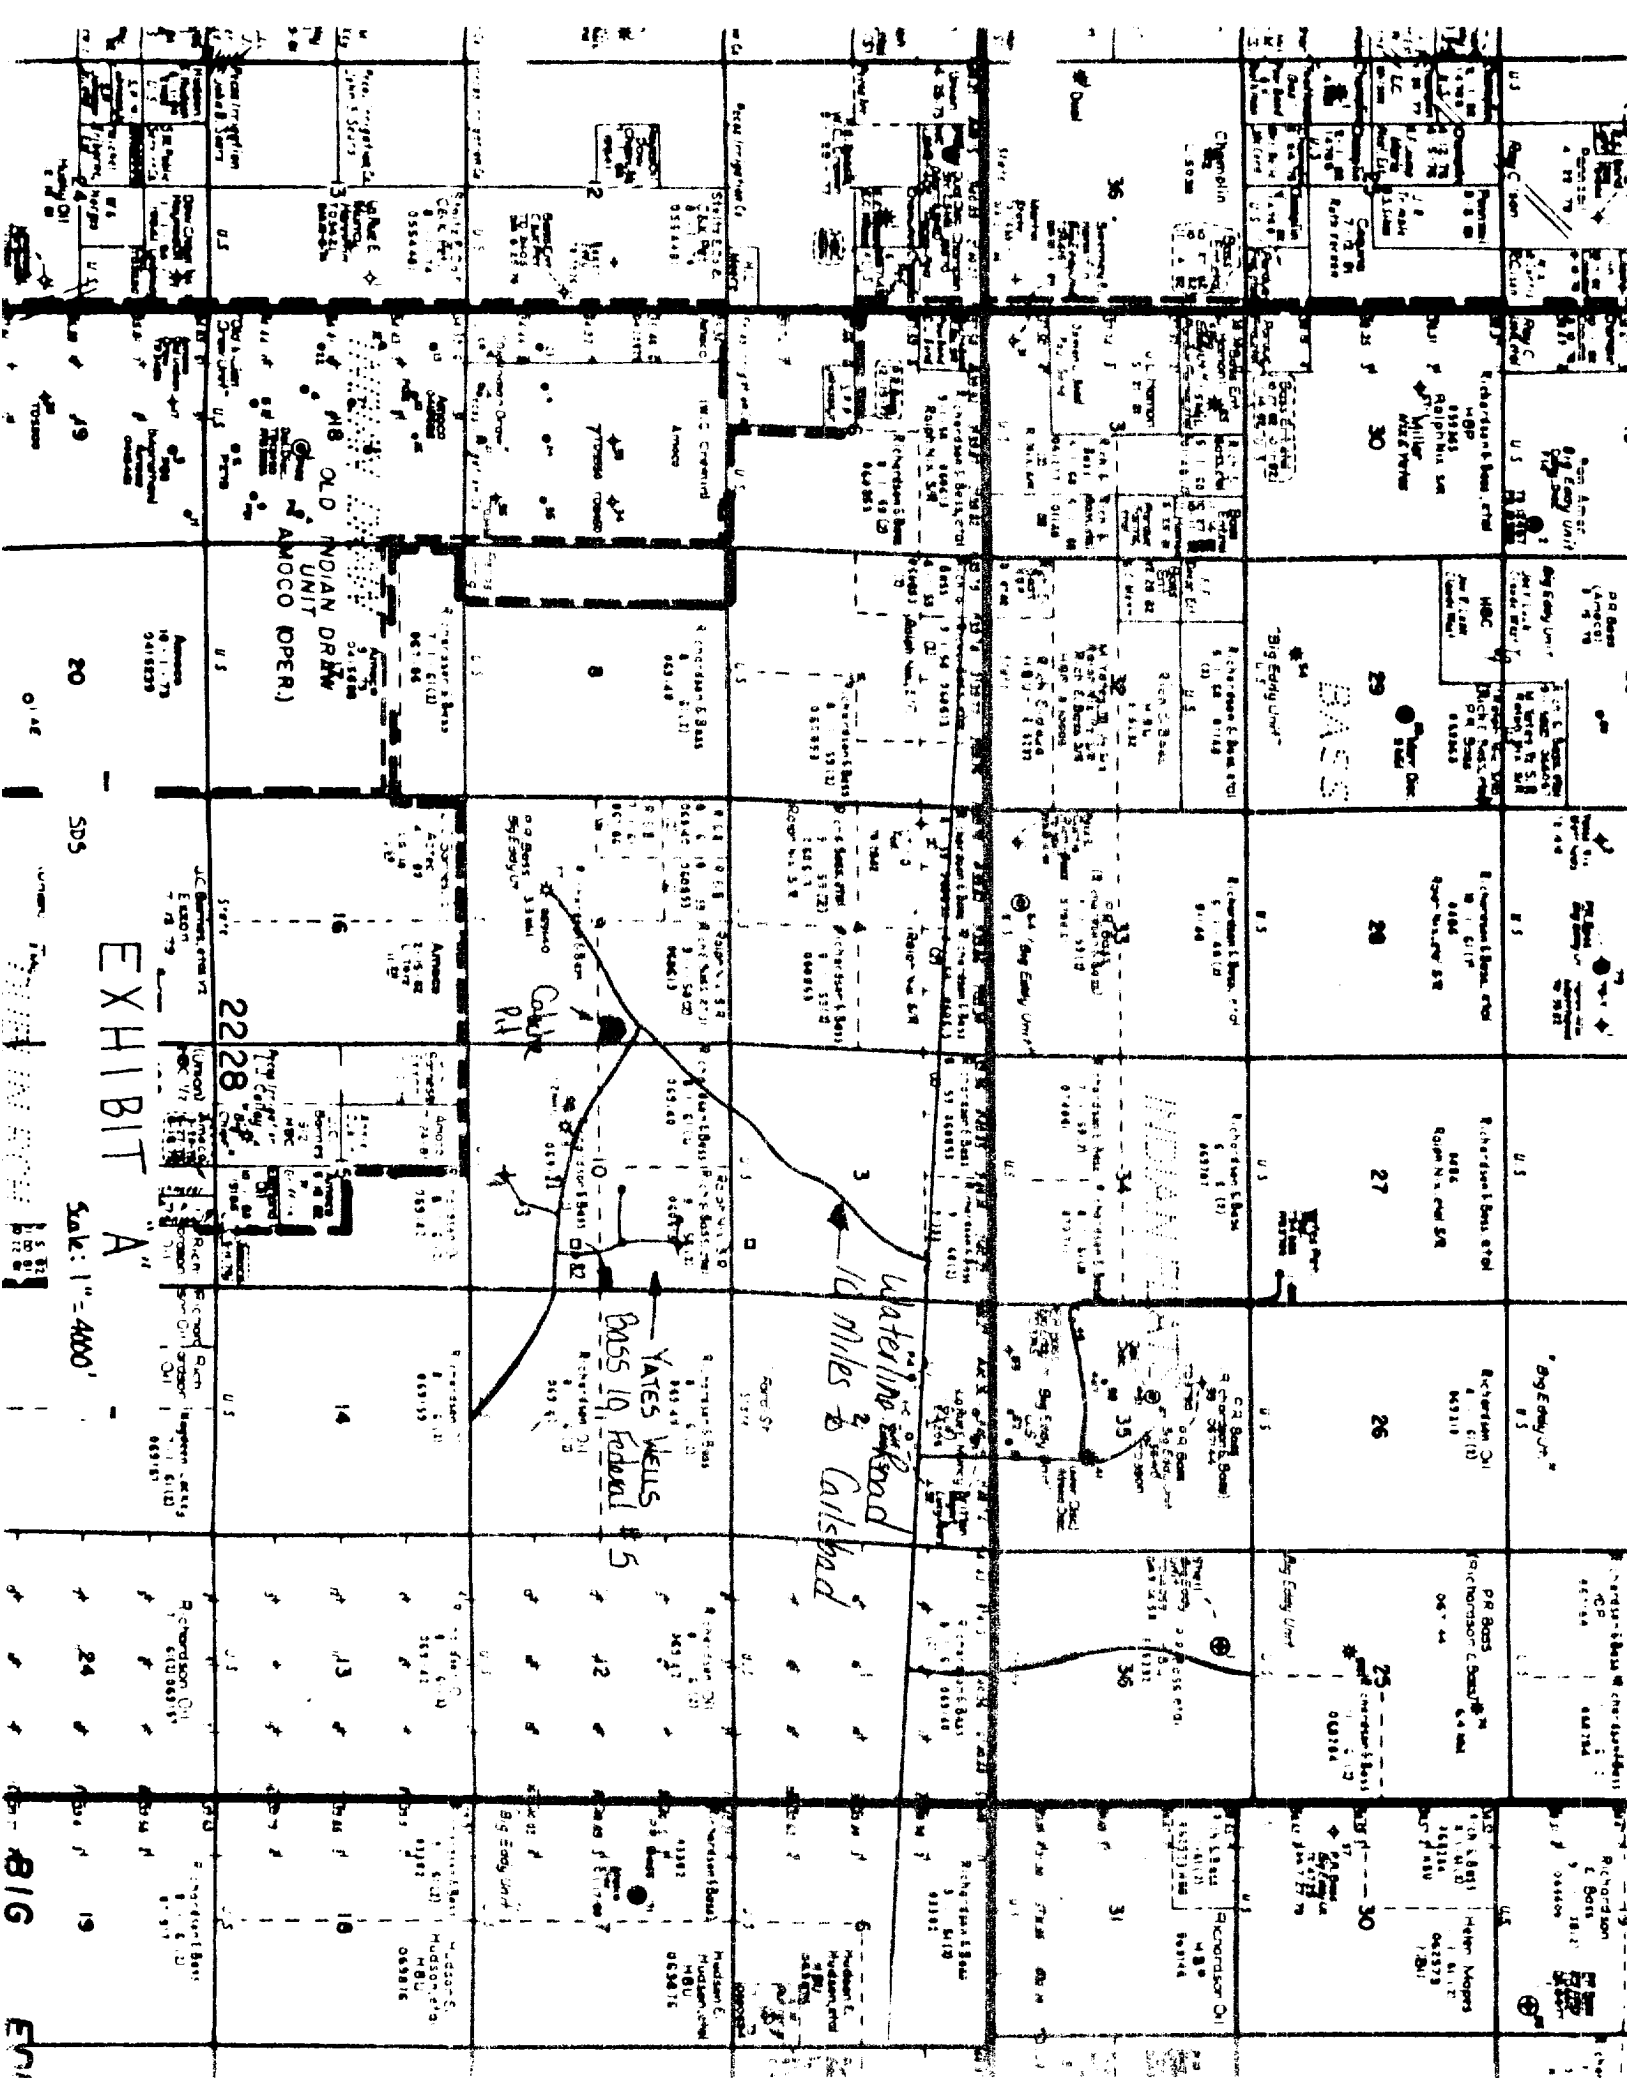


EXHIBIT A

20 SDS

Scale: 1" = 4000'

BIG EN

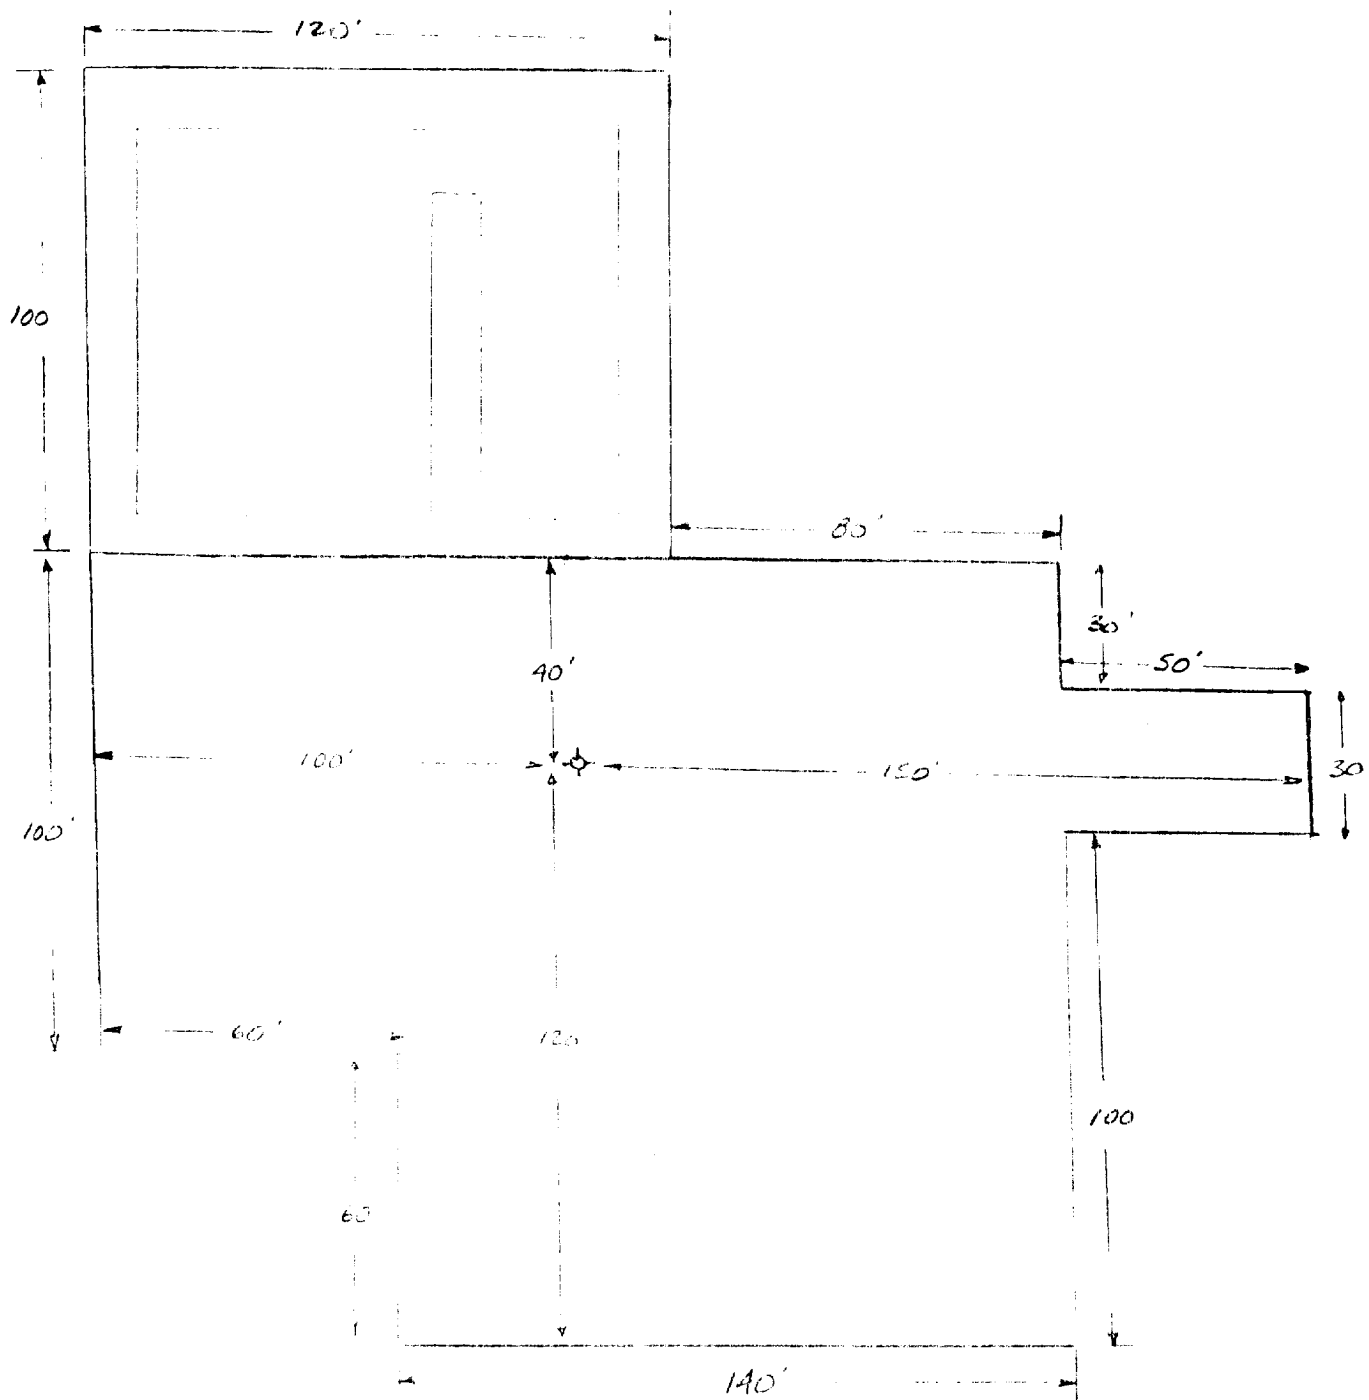


EXHIBIT "B"