

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

NM OIL CONS. COM. DIVISION
Submit in the
Other instructions on re-
verse side)
Artesia, NM 88210

Form approved.
Budget Bureau No. 42-R1424.

CKF

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT" for such proposals.)

1. OIL WELL ☒ GAS WELL ☐ OTHER ☐		7. UNIT AGREEMENT NAME	
2. NAME OF OPERATOR DINERO OPERATING COMPANY		8. FARM OR LEASE NAME DEWEY	
3. ADDRESS OF OPERATOR P.O. DRAWER 10505, MIDLAND, TEXAS 79702		9. WELL NO. #2	
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements. See also space 17 below.) At surface 560' From the North Line and 2060' From the East Line		10. FIELD AND POOL, OR WILDCAT Und Malage Delaware	
14. PERMIT NO.		11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA Sec. 24, T-24-S R-28-E	
15. ELEVATIONS (Show whether D.M., R.L., or, etc.) 2983.4" G.T.		12. COUNTY OR PARISH Eddy	
		13. STATE New Mexico	

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
TEST WATER SHUT-OFF ☐	PULL OR ALTER CASING ☐	WATER SHUT-OFF ☐	REPAIRING WELL ☐
FRACURE TREAT ☐	MULTIPLE COMPLETE ☐	FRACURE TREATMENT ☐	ALTERING CASING ☐
SHOOT OR ACIDIZE ☐	ABANDON* ☐	SHOOTING OR ACIDIZING ☐	ABANDONMENT* ☐
REPAIR WELL ☐	CHANGE PLANS ☐	(Other) Run 4 1/2" casing and cement	
(Other)		(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)	

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.) *

1-22-86 Drilled to 4600', ran electric logs, with 7 7/8" hole.

1-23-86 Plug back to 4600' to 4450', 4290' to 4190' with Class C Cement - 67 sacks.

Ran 88 joints of 4 1/2" - 10.50# J-55 casing with float collar and guide shoe, set at 3656.63 with threads off tally. Float collar at 3612.71.

Cement by the Western Company:

600 sacks Pacesetter Lite C with 3# pr. sack Hyseal


485 sacks 50/50 Poz. C with 3# salt per sack

Displaced plug with water - 57 barrels.

Plug down with 1000# at 11:20 a.m. MST. Released pressure and float held O.K. Circulated 140 sacks of cement to bit. Set slips on 4 1/2 casing.

ACCEPTED FOR RECORD

Gov
JAN 30 1986

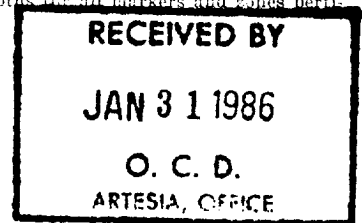

18. I hereby certify that the foregoing is true and correct

SIGNED *Production Clerk* TITLE CARLSBAD, NEW MEXICO DATE 1/27/86

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____

CONDITIONS OF APPROVAL, IF ANY: