

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUBMIT IN TRIPLICATE
(Other instructions on reverse side)

Budget Bureau No. 1004-0135
Expires August 31, 1985

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

RECEIVED

OIL WELL ☒ GAS WELL ☐ OTHER ☐

2. NAME OF OPERATOR

PHILLIPS PETROLEUM COMPANY

3. ADDRESS OF OPERATOR

4001 Penbrook St., Odessa, Texas 79762

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*
See also space 17 below.)
At surface

Surface: Unit L, 1200' FWL & 2240' FSL

BHL: Unit L, 660' FWL & 1980' FSL

14. PERMIT NO.

30-015-26436

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

3307.6' GL; 3318.6' KB

5. LEASE DESIGNATION AND SERIAL NO.

NM 70335

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Livingston Ridge Fed

9. WELL NO.

2

10. FIELD AND POOL, OR WILDCAT

Cabin Lake (Delaware)

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

Sec. 1, T-22-S, R-30-E

12. COUNTY OR PARISH

Eddy

13. STATE

NM

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON*

CHANGE PLANS

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

REPAIRING WELL

ALTERING CASING

ABANDONMENT*

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

2/6/91 Perforated w/4" casing guns 7748'-7464', 33 shots; 7494'-7580', 173 shots.

2/8/91 Treat perforations 7448'-7580' w/2000 gal. 7-1/2% NeFe HCL.

2/13/91 Fracture treat perforations 7448'-7580' w/44000 gal. polyemulsion with 20/40 mesh sand & 16/30 mesh resin-coated sand. Swabbing back load.

3/5/91 WIH w/2-7/8", 6.5#/ft. tbg. & set @ 7578'.

3/7/91 WIH w/ pump and rods. Preparing to put on production.

3/11/91 Pumped 31 BO & 97 BW.

Temp. drop pending potential test.

18. I hereby certify that the foregoing is true and correct

SIGNED

L. M. Sanders

TITLE

Supervisor,
Regulation & Proration

DATE

3/12/91


(This space for Federal or State office use)

APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:

TITLE

*See Instructions on Reverse Side

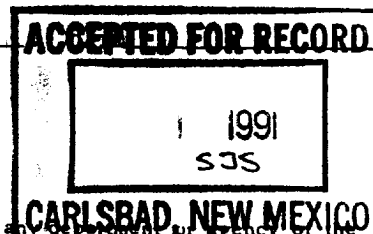

ACCEPTED FOR REC

APR 19 1964