


H₂S TRIM REQUIRED
YES _____ NO _____

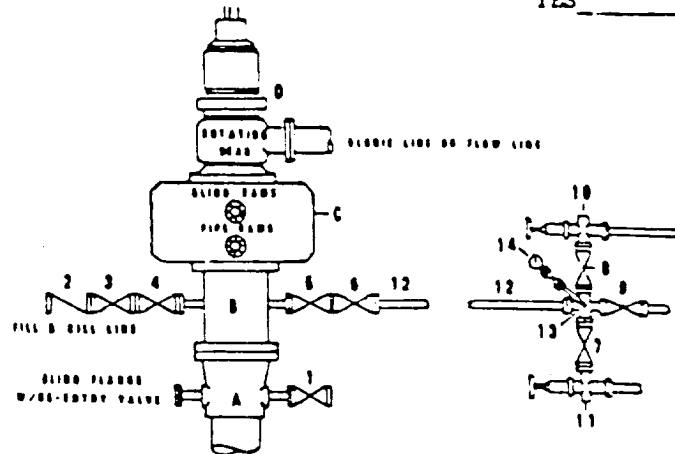

MATERIAL LIST - CONDITION II -

- A Texaco Wellhead
- 3 3000# W.P. drilling spool with a 2" minimum flanged outlet for kill-line and 3" minimum flanged outlet for choke line
- C 3000# W.P. Dual ram type preventer, hydraulic operated with 1" steel, 3000# W.P. control lines (where sub-structure height is adequate, 2-3000# W.P. single ram type preventers may be utilized.)
- D Rotating Head and extended Baffle Line.
- 1,3,4, 2" minimum 3000# W.P. flanged full opening steel gate
7,8 valve, or Halliburton Lo Torc Plug valve.
- 2 2" minimum 3000# W.P. back pressure valve
- 5,6,9 3" minimum 3000# W.P. flanged full opening steel gate
valve, or Halliburton Lo Torc Plug valve.
- 12 3" minimum schedule 80, Grade "B", seamless line pipe
- 13 2" minimum x 3" minimum 3000# W.P. flanged cross
- 10, 11 2" minimum 3000# W.P. adjustable choke bodies
- 14 Cameron Mud Gauge or equivalent (location optional
in choke line.)

<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 20%;">SCALE</td> <td style="width: 20%;">DATE</td> <td style="width: 20%;">EST NO</td> <td style="width: 20%;">DRG NO</td> </tr> <tr> <td>DRAWN BY</td> <td></td> <td></td> <td></td> </tr> <tr> <td>CHECKED BY</td> <td></td> <td></td> <td></td> </tr> <tr> <td>APPROVED BY</td> <td></td> <td></td> <td></td> </tr> </table> TEXACO, INC WILSON DIVISION WILSON 19228				SCALE	DATE	EST NO	DRG NO	DRAWN BY				CHECKED BY				APPROVED BY			
SCALE	DATE	EST NO	DRG NO																
DRAWN BY																			
CHECKED BY																			
APPROVED BY																			
EXHIBIT C																			