

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

RECEIVED

FEB 15 1993

O. C. D.

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

YATES PETROLEUM CORPORATION (505) 748-1471

3. Address and Telephone No.

105 South 4th St., Artesia, NM 88210

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

Unit 0, 660' FSL & 2310' FEL, Sec. 1-T22S-R30E

5. Lease Designation and Serial No.

NM 70334

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Jasmine AJI Federal #1

9. API Well No.

30-015-26799

10. Field and Pool, or Exploratory Area

Und. Cabin Lake Delaware

11. County or Parish, State

Eddy, NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent  
☒ Subsequent Report  
☐ Final Abandonment Notice

TYPE OF ACTION


- ☐ Abandonment  
☐ Recompletion  
☐ Plugging Back  
☐ Casing Repair  
☐ Altering Casing  
☒ Other Set Surface Casing

- ☐ Change of Plans  
☐ New Construction  
☐ Non-Routine Fracturing  
☐ Water Shut-Off  
☐ Conversion to Injection  
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Spudded 26" hole 3:15 PM 1-26-93. Set 40' of 20" conductor, redi-mix to surface. Notified BLM Answering Service, Carlsbad, NM, of spud.  
Ran 9 joints 13-3/8" 54.5# J-55 ST&C casing set 351'. Guide shoe set 351'. Insert float set at 309'. Cemented w/350 sx "C" w/2% CaCl2 + 1/4# Celloseal (yield 1.32, wt 14.8). PD 8:30 AM 1-28-93. Bumped plug to 400 psi, float held OK. Circulated 118 sacks cement. WOC. Drilled out 6:15 AM 1-29-93. WOC 21 hrs and 45 mins. NU and tested to 500 psi for 30 mins. okay. Reduced hole to 11" and resumed drilling.

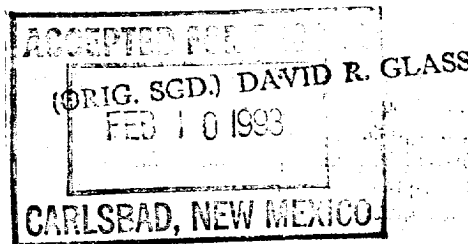

14. I hereby certify that the foregoing is true and correct

Signed

Title Production Supervisor

Date 2-3-93

(This space for Federal or State office use)

Approved by

Title

Date

Conditions of approval, if any: