

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

NM OIL CONS COMMISSION

Drawer DD
Artesia, NM 88210
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

CONFIDENTIAL

2. Name of Operator

Pogo Producing Company

3. Address and Telephone No.

P. O. Box 10340, Midland, TX 79702-7340 (915) 682-6822

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

330' FSL & 2310' FEL, Section 12, T22S, R31E

MAY 15 1996

5. Lease Designation and Serial No.
NM-29233

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Federal 12 No. 9

9. API Well No.

30-015-26971

10. Field and Pool, or Exploratory Area

Undes. Liv. Ridge Delaware

11. County or Parish, State

Eddy County, NM

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

☐ Notice of Intent

☐ Subsequent Report

☐ Final Abandonment Notice

TYPE OF ACTION

☐ Abandonment

☐ Recompletion

☐ Plugging Back

☐ Casing Repair

☐ Altering Casing

☒ Other Spud & Set Surface Csg

☐ Change of Plans

☐ New Construction

☐ Non-Routine Fracturing

☐ Water Shut-Off


☐ Conversion to Injection

☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

MIRU Nabors #353. Spud @ 1800 hrs CDT 03/06/95. Drilled 17-1/2" hole to 630'. TD reached 1700 hrs CDT 03/07/95. Ran 14 jts 13-3/8" 54.5# J-55 ST&C casing. Cmt'd w/ 650 sxs "C" Lite w/ 2% CaCl₂ + 200 sxs "C" w/ 2% CaCl₂ @ 14.8 ppg. Circ'd 200 sxs excess cmt. Total WOC 14 hrs. Cement has compressive strength over 500 psi after 8 hrs. Tested BOP's to 1500#.

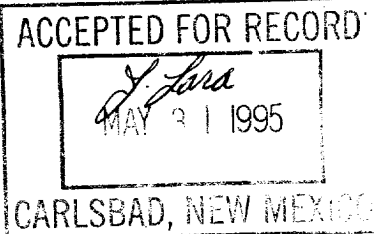

14. I hereby certify that the foregoing is true and correct

Signed [Signature]

Title Senior Operations Engineer

Date April 24, 1995

(This space for Federal or State office use)

Approved by

Conditions of approval, if any:

Title

Date

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*See Instruction on Reverse Side