

CONFIDENTIAL

N.M. Oil Cons. Division

811 S. 1st St. - 40

Ariesia, NM 87003-2834

FORM APPROVED

Bureau No. 1004-0135

Expires March 31, 1993

Form 3163-5

JUNE 1990

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

## SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT --" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

Mallon Oil Company

3. Address and Telephone No.

P.O. Box 3256, Carlsbad, NM 88220

(505) 885-4596

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1980' FNL and 660' F/WL (SW NW) Unit E  
Sec. 10, T24S-R26E

5. Lease Designation and Serial No.  
LC064200

6. If Indian, Allotee or Tribe Name

N/A

7. If Unit or CA, Agreement Designation

N/A

8. Well Name and No.

Mallon 10 Federal No. 1

9. Well API No.

30-015-29473

10. Field and Pool, or Exploratory Area

Undes. Black River, Delaware

11. County or Parish, State

Eddy County, New Mexico

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

TYPE OF ACTION

☐ Notice of Intent☐ Abandonment☐ Change of Plans☒ Subsequent Report☐ Recompletion☐ New Construction☐ Plugging Back☐ Non-Routine Fracturing☐ Casing Repair☐ Water Shut-Off☐ Final Abandonment Notice☐ Altering Casing☐ Conversion to Injection☒ Other: TD/Production Csg☐ Dispose Water

(Note: Report results of mudlog completion on well

Completion or Recompletion Report and Log form)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details and give pertinent dates including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this zone.)

Mallon Oil Company drilled a 7-7/8" hole from 523' to 5400' (TD). Ran 5-1/2" x 17# J55 casing to 5400'.

Cement first stage with 485 sacks Class H cement + additives. Circulate 55 sacks to surface.

Cement second stage with 410 sacks 50/50 POZ C + additives followed by 135 sacks Class H cement + additives. Cement top 200' from surface. Plug down at 3:30 pm (MST) 6/20/97.

14. I hereby certify that the foregoing is true and correct

Signed

Theresa A. McAndrews

Title

Office Manager


Date 7-2-97

(THIS SPACE FOR FEDERAL OR STATE OFFICE USE)

Approved By

Date

Conditions of approval, if any

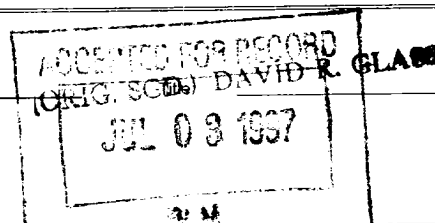

Title 18 U. S. C. Section 1001, makes it a crime for any person knowingly and willfully to make any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*See Instruction on Reverse Side

CONFIDENTIAL