


# DEVON ENERGY CORPORATION WELLBORE SCHEMATIC

WELL NAME: Indian Draw 13 <del>Federal</del> # 1				FIELD: Otis (Morrow Gas)		
LOCATION: Section 13, T22S, R27E				COUNTY: EDDY		STATE: NM
ELEVATION: GL= 3088' KB=3102"				SPUD DATE: 7/30/97		COMP DATE: 1/6/98
API#: 30-015-29714		PREPARED BY: C. Palmer			DATE: 9/24/01	
TUBULARS	DEPTH	SIZE	WEIGHT	GRADE	THREAD	HOLE SIZE
CASING:	0' - 402'	13 3/8"	48	H-40	ST&C	17 1/2"
CASING:	0' - 5,850'	9 5/8"	43.5	N-80	LT&C	12 1/4"
LINER:	5,618' - 12,292'	5 1/2"	17	S-95/N-80	LT&C	8 1/2"
TUBING:						

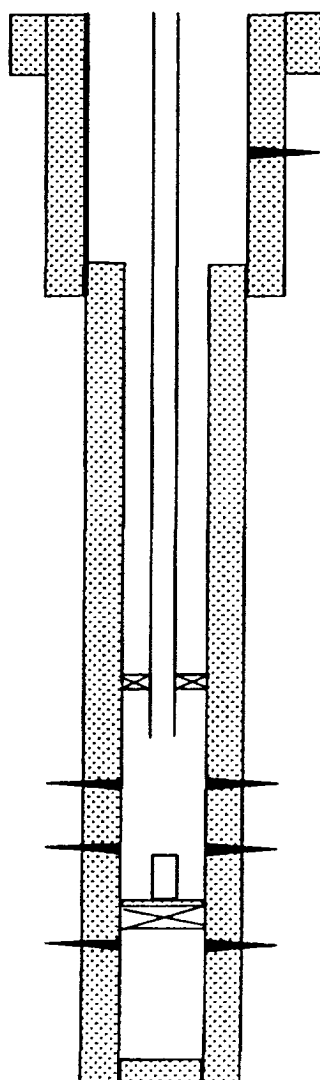

☒ CURRENT

☐ PROPOSED

13 3/8" csg cmt'd w/400 sxs Class "C" (circ 42 sxs to pit)

9 5/8" csg cmt'd w/2,000 sxs C in two stages (circ 150 sxs to pit)

9 5/8" DV Tool at 3,205'.

## Tubing String Detail:

365 jts, 2 3/8" tubing

4' RA sub

1 jt, 2 3/8" tubing

On/Off tool w/1.875" "X" landing nipple @ 11,535'

Perma Latch Packer

1 jt, 2 3/8" tubing

XN Profile Nipple with 1.79" no-go @ 11,572'

vent

12' 2 3/8" sub

8', 2 3/8" sub and XO

Auto release @ 11,606'

Morrow Perfs: 11,710-14', 11,730'-39' 4 SPF (52 holes) shot on 9/7/99

Middle Morrow Perfs: 11,832-42' (4 SPF)

12' of TCP guns from perf 11,832-42'

CIBP @ 12,062' dumped 20' cmt on CIBP

Lower Morrow "C" Sand Perfs: 12,092-104' & 12,109-114'

5 1/2" Liner cmt'd w/1420 sx H. Fair cement to liner top.

PBTD @ 12,233' f/CBL

TD @ 12,295'