


Operator Mallen Oil Company  
 Well Mallen 40' Federal #4  
 Unit A Section 10 Township 24 Range 26  
 API # 30-015-29775

TOPS

Salada	446'	*
B Salt	1390'	*
Lamar LS	1698'	
Delaware Sd	1904'	*
Bear Spring	5222'	*

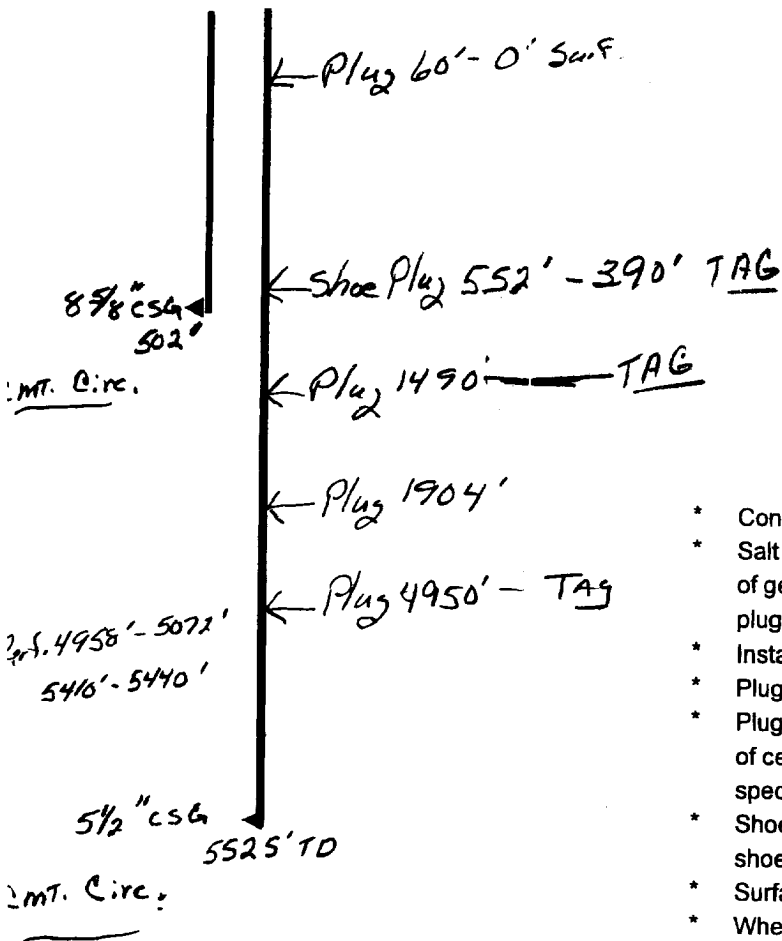

- \* Contact OCD 24 hrs. prior to any work done.
- \* Salt gel mud consisting of 10# brine with 25# of gel per barrel must be placed between each plug.
- \* Install dry hole marker as per Rule 202.B.2
- \* Plugs are to be set from point indicated up.
- \* Plugs must not be less than 100' or 25 Sacks of cement, whichever is greater, unless specifically indicated.
- \* Shoe and stub plugs will be 50' above and below shoe or stub and tagged.
- \* Surface plug will be from 0' - 60'
- \* Where plugs are required, cement must be placed inside and outside of all casing string(s) in the correct footage or sacks required, if no cement exists.
- \* Plugs to be tagged will be indicated.

*Handwritten signature/initials*