

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUBMIT IN DUPLICATE
(Other Instructions on reverse side)

FORM APPROVED
OMB NO. 1004-0136
Expires: February 28, 1995

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

1a. TYPE OF WORK

DRILL ☒

DEEPEN ☐

b. TYPE OF WELL

OIL WELL ☒

GAS WELL ☐

OTHER ☐

SINGLE ZONE ☐

MULTIPLE ZONE ☐

2. NAME OF OPERATOR

POGO PRODUCING COMPANY

(RICHARD WRIGHT)

915-685-8100

3. ADDRESS AND TELEPHONE NO.

P.O. BOX 10340 MIDLAND, TEXAS 79702-7340

915-685-8100

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)

At surface

2310' FSL & 990' FEL SEC. 24 T22S-R31E EDDY CO. NM

At proposed prod. zone SAME

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE*

Approximately 25 miles East of Carlsbad New Mexico

15. DISTANCE FROM PROPOSED*

LOCATION TO NEAREST

PROPERTY OR LEASE LINE, FT.

(Also to nearest drig. unit line, if any)

990'

16. NO. OF ACRES IN LEASE

17. NO. OF ACRES ASSIGNED TO THIS WELL

18. DISTANCE FROM PROPOSED LOCATION*

TO NEAREST WELL, DRILLING, COMPLETED,

OR APPLIED FOR, ON THIS LEASE, FT.

1000'

19. PROPOSED DEPTH

8500'

20. ROTARY OR CABLE TOOLS

ROTARY

21. ELEVATIONS (Show whether DF, RT, GR, etc.)

3586' GR.

22. APPROX. DATE WORK WILL START*

WHEN APPROVED

PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	GRADE SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
25"	20" Conductor	NA	40'	Cement to surface with Redi-mix
17 1/2"	H-40 13 3/8"	48	800'	850 Sx. circulate cement to surface
11"	J-55 8 5/8"	32 & 24	4500'	1500 Sx. " " " "
7 7/8"	J-55 5 1/2"	17 & 15.5	8500'	1000 Sx. Place DV tool @ 6000'±

1. Drill 25" hole to 40'. Set 40' of 20" conductor pipe and cement to surface with Redi-mix.
2. Drill 17 1/2" hole to 800'. Run and set 800' of 13 3/8" H-40 48# ST&C casing. Cement with 850 Sx. of Class "C" cement + additives, circulate cement to surface.
3. Drill 11" hole to 4500'. Run and set 4500' of 8 5/8" J-55 32 & 24# ST&C casing. Cement with 1500 Sx. of Class "C" cement + additives, circulate cement to surface.
4. Drill 7 7/8" hole to 8500'. Run and set 8500' of 5 1/2" J-55 15.5 & 17# LT&C CASING. Cement in two stages with stage tool at 6000'±. Cement 1st stage with 450 Sx. of Class "H" cement, cement 2nd stage with 550 Sx of Class "C" light + additives.

* Pogo Producing Company accepts all applicable terms, conditions, stipulations, and restrictions pertaining to this lease.

Notify OCD at SPUD & TIME
to witness cementing the

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout prevention program, if any.

SIGNED Jose T. Gonzalez TITLE Agent

DATE 04/04/00

(This space for Federal or State office use)

PERMIT NO.

APPROVAL DATE

Approval approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
CONDITIONS OF APPROVAL, IF ANY:

(ORIG. SGD.) M. J. CHAVEZ

STATE DIRECTOR

APPROVED BY

TITLE

DATE

*See Instructions On Reverse Side

RECEIVED
APR 05 2000
BLM
ROSWELL, NM

DISTRICT I
P.O. Box 1880, Hobbs, NM 88241-1960

State of New Mexico
Energy, Minerals and Natural Resources Depart.

Form C-102
Revised February 10, 1994
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

DISTRICT II
P.O. Drawer DD, Artesia, NM 88211-0719

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION

P.O. Box 2088
Santa Fe, New Mexico 87504-2088

DISTRICT IV
P.O. BOX 2088, SANTA FE, N.M. 87504-2088

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number	Pool Code 39360	Pool Name LIVINGSTON RIDGE-DELAWARE
Property Code	Property Name GETTY "24" FEDERAL	Well Number 11
OGRID No. 17891	Operator Name POGO PRODUCING COMPANY	Elevation 3586




Surface Location

UL or lot No.	Section 24	Township 22 S	Range 31 E	Lot Idn	Feet from the 2310	North/South line SOUTH	Feet from the 990	East/West line EAST	County EDDY
---------------	---------------	------------------	---------------	---------	-----------------------	---------------------------	----------------------	------------------------	----------------


Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
Dedicated Acres 40	Joint or Infill	Consolidation Code	Order No.						

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

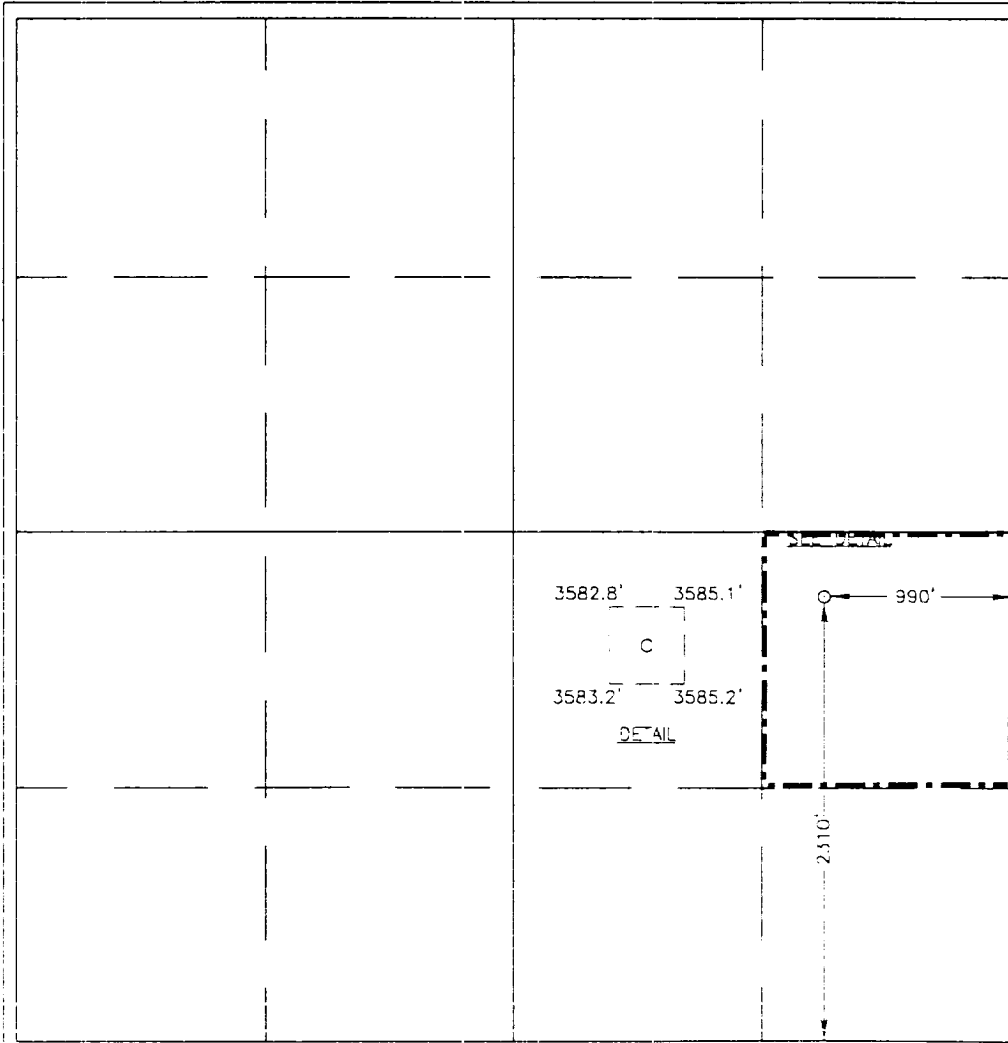				OPERATOR CERTIFICATION I hereby certify the the information contained herein is true and complete to the best of my knowledge and belief.  Signature Joe T. Janica Printed Name Agent Title 04/04/00 Date	
				SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. MARCH 21, 2000 Date Surveyed Signature & Seal of Professional Surveyor  30-11-0366 Certificate No. RONALD T. EIDSON 3239 GARY EIDSON 12641 MACON McDONALD 12185	

VICINITY MAP

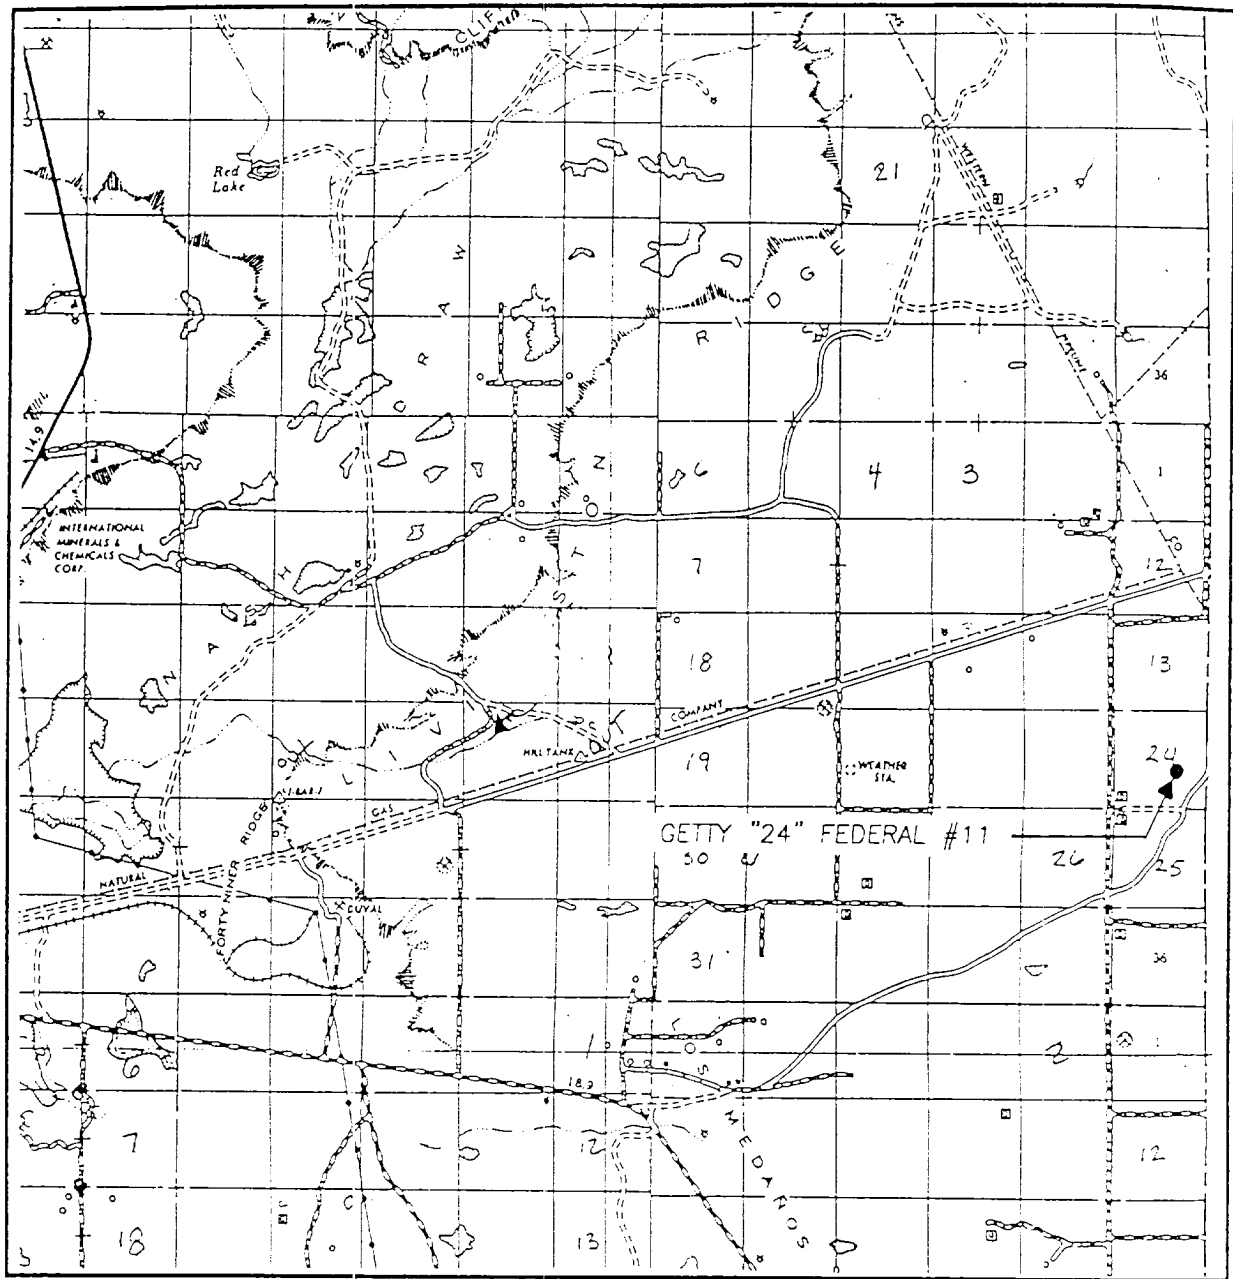

SCALE: 1" = 2 MILES

SEC. 24 TWP. 22-S RGE. 31-E

SURVEY N.M.P.M.

COUNTY EDDY

DESCRIPTION 2310' FSL & 990' FEL


ELEVATION 3586

OPERATOR POGO PRODUCING COMPANY

LEASE GETTY "24" FEDERAL

JOHN WEST SURVEYING
HOBBS, NEW MEXICO
(505 393-3117)

LOCATION VERIFICATION MAP

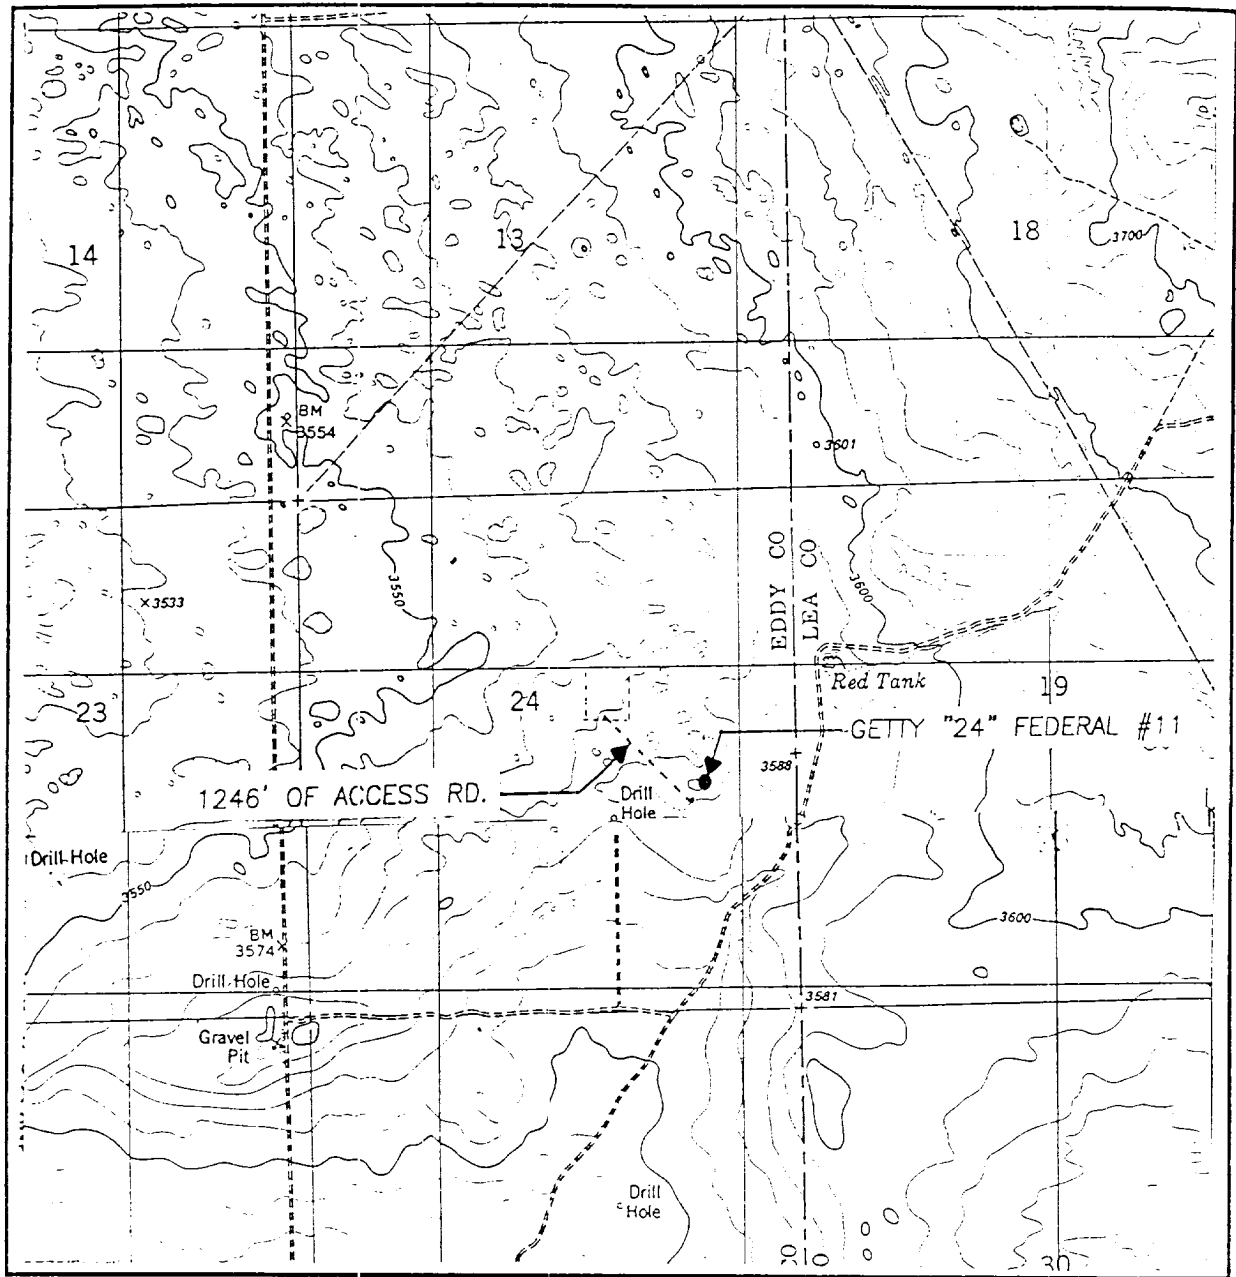

SCALE: 1" = 2000'

CONTOUR INTERVAL:
THE DIVIDE -- 10'
BOOTLEG RIDGE -- 10'

SEC. 24 TWP. 22-S RGE. 31-E

SURVEY N.M.P.M.

COUNTY EDDY

DESCRIPTION 2310' FSL & 990' FEL

ELEVATION 3586

OPERATOR POGO PRODUCING COMPANY

LEASE GETTY "24" FEDERAL

U.S.G.S. TOPOGRAPHIC MAP

THE DIVIDE, BOOTLEG RIDGE, N.M.

JOHN WEST SURVEYING
HOBBS, NEW MEXICO
(505 393-3117)

APPLICATION TO DRILL

POGO PRODUCING COMPANY
 GETTY "24" FEDERAL # 11
 UNIT "I" SECTION 24
 T22S-R31E EDDY CO. NM

In response to questions asked under Section II B of Bulletin NTL-6 the following information is provided for your consideration:

1. Location: 2310' FSL & 990' FEL SEC. 24 T22S-R31E EDDY CO. NM
2. Elevation above sea level: 3585' GR.
3. Geologic name of surface formation: Quaternary Aeolian Deposits.
4. Drilling tools and associated equipment: Conventional rotary drilling rig using fluid as a circulating medium for solids removal.
5. Proposed drilling depth: 8500'
6. Estimated tops of geological markers:

Rustler Anhydrite	760'	Bell Canyon	4590'
Castile	3890'	Brushy Canyon	7100'
Delaware	4520'	Bone Spring	8400'
7. Possible mineral bearing formation:

Delaware	Oil
Brushy Canyon	Oil
Bone Spring	Oil
8. Casing program:

Hole size	Interval	Casing CD	Weight	Thread	Collar	Grade
25"	0-40	20"	NA	NA	NA	Conductor
17½"	0-800'	13 3/8"	48	8-R	ST&C	H-40
11"	0-4500'	8 5/8"	32 & 24	8-R	ST&C	J-55
7 7/8"	0-8500'	5½"	15.4 & 17	8-R	LT&C	J-55

APPLICATION TO DRILL

POGO PRODUCING COMPANY
GETTY "24" FEDERAL # 11
UNIT "I" SECTION 24
T22S-R31E EDDY CO. NM

9. Cementing and Setting Depth:

20"	Conductor	Set 40' of 20" conductor pipe and cement to surface with Redi-mix.
13 3/8"	Surface	Set 800' of 13 3/8" H-40 48# ST&C casing. Cement with 850 Sx. of Class "C" cement + additives, circulate cement to surface.
8 5/8"	Intermediate	Set 4500' of 8 5/8" J-55 24 & 32# ST&C casing. Cement with 1500 Sx. of Class "C" cement + additives, circulate cement to surface.
5 1/2"	Production	Set 8500' of 5 1/2" J-55 15.5 & 17 # LT&C casing. Cement in two stages, with stage tool set at 6000'±. Cement 1st stage with 450 Sx. of Class "H", 2nd stage cement with 550 Sx. of Class "C" Lite + additives.

10. Pressure Control Equipment: Exhibit "E". A 900 Series 1500 PSI working pressure B.O.P. consisting of a double ram type preventor with a bag type annular preventor. BOP unit will be hydraulically operated. Exhibit "E-1". Choke manifold and closing unit. BOP will be nipped up on 13 3/8" casing and will be operated at least once each 24 Hr. period while drilling and blind rams will be operated when out of hole during trips. Flow sensor, PVT, full opening stabbing valve and upper kelly cock will be utilized. No abnormal pressure or temperature is expected while drilling.

11. Proposed Mud Circulating System:

Depth	Mud Wt.	Visc,	Fluid Loss	Type Mud
40-800'	8.6-8.8	29-38	NC	Fresh water spud mud add paper to control seepage and clean with high viscosity sweeps.
800-4500'	10.2-10.5	29-36	NC	Brine water, use paper to control seepage, use high viscosity sweeps to clean hole.
4500-8500	8.6-8.8	29-40	NC	Fresh water, use paper to control seepage, and use high viscosity sweeps to clean hole.

Sufficient mud materials will be kept on location at all times in order to combat lost circulation, unexpected kicks. In order to run DST'S, open hole logs, and casing the viscosity and water loss may have to be adjusted to meet these needs.

APPLICATION TO DRILL

POGO PRODUCING COMPANY
GETTY "24" FEDERAL # 11
UNIT "I" SECTION 24
T22S-R31E EDDY CO. NM

12. Testing, Logging and Coring Program:
- A. Open hole logs: Run Dual Induction, CNL, Gamma Ray, Caliper from TD. to 4500'.
 - B. Run Gamma Ray, Neutron from 4500' to surface.
 - C. Rig up mud logger on hole at 4500' and keep on to TD.
 - D. No DST's or DST's are planned at this time.
13. Potential Hazards:
- No abnormal pressures or temperatures are expected. Hydrogen Sulfide gas may be encountered, H₂S detectors will be in place to detect any presence. No lost circulation is expected to occur. All personnel will be familiar with all aspects of safe operation of equipment being used. Estimated BHP 3850 PSI, estimated BHT 140°.
14. Anticipated Starting Date and Duration of Operation:
- Road and location construction will begin after BLM approval of APD. Anticipated spud date as soon as approved. Drilling expected to take 25 days. If production casing is run an additional 30 days will be required to complete and construct surface facilities.
15. Other Facets of Operations:
- After running casing, cased hole gamma ray neutron collar logs will be run from total depth over possible pay intervals. The Delaware pay will be perforated and stimulated. The well will be swab tested and potentialized as an Oil well.

HYDROGEN SULFIDE DRILLING OPERATIONS PLAN

1. All Company and Contract personnel admitted on location must be trained by a qualified H₂S safety instructor to the following:
 - A. Characteristics of H₂S
 - B. Physical effects and hazards
 - C. Proper use of safety equipment and life support systems.
 - D. Principle and operation of H₂S detectors, warning system and briefing areas.
 - E. Evacuation procedure, routes and first aid.
 - F. Proper use of 30 minute pressure demand air pack.
2. H₂S Detection and Alarm Systems
 - A. H₂S detectors and audio alarm system to be located at bell nipple, end of bloopie line (mud pit) and on derrick floor or doghouse.
3. Windsock and/or wind streamers
 - A. Windsock at mudpit area should be high enough to be visible.
 - B. Windsock at briefing area should be high enough to be visible.
 - C. There should be a windsock at entrance to location.
4. Condition Flags and Signs
 - A. Warning sign on access road to location.
 - B. Flags to be displayed on sign at entrance to location. Green flag, normal safe condition. Yellow flag indicates potential pressure and danger. Red flag, danger, H₂S present in dangerous concentration. Only emergency personnel admitted to location.
5. Well control equipment:
 - A. See exhibit "E"
6. Communication
 - A. While working under masks chalkboards will be used for communication.
 - B. Hand signals will be used where chalk board is inappropriate.
 - C. Two way radio will be used to communicate off location in case of emergency help is required. In most cases cellular telephoned will be available at most drilling foreman's trailer or living quarters.
7. Drillstem Testing
 - A. Exhausts will be watered.
 - B. Flare line will be equipped with an electric ignitor or a propane pilot light in case gas reaches the surface.
 - C. If location is near any dwelling a closed D.S.T. will be performed.

HYDROGEN SULFIDE DRILLING OPERATIONS PLAN

8. Drilling contractor supervisor will be required to be familiar with the effects H_2S has on tubular goods and other mechanical equipment.
9. If H_2S is encountered, mud system will be altered if necessary to maintain control of formation. A mud gas separator will be brought into service along with H_2S scavengers if necessary.

SURFACE USE PLAN

POGO PRODUCING COMPANY
GETTY "24" FEDERAL # 11
UNIT "I" SECTION 24
T22S-R31E EDDY CO. NM

1. EXISTING ROADS. Area map, Exhibit "B" is a reproduction of the New Mexico General Hi-way Co. Map. Exhibit "C" is a reproduction of a topographic map. Existing roads and proposed roads are shown on each exhibit. All roads will be maintained in a condition equal to or better than existed prior to start of construction.
 - A. Exhibit "A" shows the proposed development well as staked.
 - B. From Hobbs New Mexico take U.S. Highway 62-180 West toward Carlsbad NM, go 38 miles to mile post 67. Turn South on C-29 go 13 miles turn East on lease road go .9 miles turn Southeast go 1250' to location.
 - C. Lay necessary pipelines and power lines that will be needed to produce this well along Road R.O.W or along existing R.O.W.
2. PLANNED ACCESS ROADS : Approximately 1250' of new road will be constructed.
 - A. The access road will be crowned and ditched to a 12'00" wide travel surface with 40' right-of-way.
 - B. Gradient on all roads will be less than 5.00%.
 - C. No turnouts will be necessary.
 - D. If needed, road will be surfaced with a minimum of 4" of caliche. This material will be obtained from a local source.
 - E. Centerline for the new access road has been flagged. Earthwork will be as required by field conditions.
 - F. Culverts in the access road will not be used. The road will be constructed to utilize low water crossings for drainage as required by the Topography.
3. LOCATION OF EXISTING WELLS IN A ONE-MILE RADIUS EXHIBIT "A-1"
 - A. Water wells - None known
 - B. Disposal wells - None known
 - C. Drilling wells - None known
 - D. Producing wells - As shown on Exhibit "A-1"
 - E. Abandoned wells - As shown on Exhibit "A-1"

SURFACE USE PLAN

POGO PRODUCING COMPANY
GETTY "24" FEDERAL # 11
UNIT "I" SECTION 24
T22S-R31E EDDY CO. NM

4. If on completion this well is a producer Pogo Producing Company will furnish plats showing the production and storage facilities.

5. LOCATION AND TYPE OF WATER SUPPLY:

Water will be purchased locally from a commercial source and trucked over the access roads or piped in flexible lines laid on top of the ground.

6. SOURCE OF CONSTRUCTION MATERIAL:

If possible construction will be obtained from the excavation of drill site, if additional material is needed it will be purchased from a local source and transported over the access route as shown on Exhibit "C".

7. METHODS OF HANDLING WASTE MATERIAL:

- A. Drill cuttings will be disposed of in the reserve pit.
- B. All trash, junk and other waste material will be contained in trash cages or bins to prevent scattering. When the job is completed all contents will be removed and disposed of in a approved sanitary land fill.
- C. Salts remaining after completion of well will be picked up by supplier including broken sacks.
- D. Sewage from living quarters will drain into holes with a minium depth of 10'. These holes will be covered during drilling and will be back filled upon completion. A Porta-John will be provided for the rig crews. This equipment will be properly maintained during the drilling operations and removed upon completion of the well.
- E. Remaining drilling fluids will be allowed to evaporate in the reserve pit until the pit is dry enough for breaking out. In the event that drilling fluids do not evaporate in a reasonable time they will be hauled off by transports and be disposed of at a state approved disposal facility. Later pits will be broken out to speed drying. Water produced during testing will be put in reserve pits. Any oil or condensate produced will be stored in test tanks until sold and hauled from the site.

8. ANCILLARY FACILITIES:

- A. No camps or airstrips to be constructed.

POGO PRODUCING COMPANY
GETTY "24" FEDERAL # 11
UNIT "I" SECTION 24
T22S-R31E EDDY CO. NM

9. WELL SITE LAYOUT

- A. Exhibit "D" rig site layout.
- B. This exhibit indicates proposed location of reserve and trash pits; and living facilities.
- C. Mud pits in the active circulating system will be steel pits and the reserve pit is proposed to be unlined, unless subsurface condition encountered during pit construction indicate that lining is needed for lateral containment of fluids.
- D. If needed, the reserve pit is to be lined with PVC or polyethylene line. The pit liner will be 6 mils thick. Pit liner will extend a minimum, 2'00" over the reserve pits dikes where the liner will be anchored down.
- E. The reserve pit will be fenced on three sides with four strands of barbed wire during drilling and completion phases. The fourth side will be fenced after all drilling operations have ceased. If the well is a producer, the reserve pit fence will be torn down. The reserve pit and those areas of the location not essential to production facilities will be reclaimed and seeded per BLM requirements.

10. PLANS FOR RESTORATION OF SURFACE

Rehabilitation of the location and reserve pit will start in a timely manner after all drilling operations cease. The type of reclamation will depend on whether the well is a producer or a dry hole.

However, in either event, the reserve pit will be allowed to dry properly, and fluid removed and disposed of in accordance with Article 7.B as previously noted. The pit area will then be leveled and contoured to conform to the original and surrounding area. Drainage systems, if any, will be reshaped to the original configuration with provisions made to alleviate erosion. These may need to be modified in certain circumstances to prevent inundation of the location's pad and surface facilities. After the area has been shaped and contoured, topsoil from the spoil pile will be placed over the disturbed area to the extent possible. Revegetation procedures will comply with BLM standards.

If the well is a dry hole, the pad and road area will be recountered to match the existing terrain. Topsoil will be spread to the extent possible. Revegetation will comply with BLM standards.

Should the well be a producer, the previously noted procedures will apply to those areas which are not required for production facilities.

SURFACE USE PLAN

POGO PRODUCING COMPANY
GETTY "24" FEDERAL # 11
UNIT "I" SECTION 24
T22S-R31E EDDY CO. NM

11. OTHER INFORMATION:

- A. Topography consists of sand dunes with a slight dip toward the West. Deep sandy soil supports native grasses, mesquite, and shinnery Oak.
- B. Surface is owned by the Bureau of Land Management U.S. Department of Interior. Surface is used for grazing of livestock and is leased to ranchers for this purpose.
- C. An archaeological survey will be conducted and copies of the survey will be filed in the Carlsbad Office of The Bureau of Land Management.
- D. There are no dwellings or habitation within three miles of this location.

12. OPERATORS REPRESENTATIVE:

Before construction:


TIERRA EXPLORATION INC.
P.O. BOX 2188
HOBBS, NEW MEXICO 88241
OFFICE PHONE 505-392-2112
JOE T. JANICA

During and after construction:

POGO PRODUCING COMPANY
P.O. BOX 10340
MIDLAND, TEXAS 79702-7340
OFFICE PHONE 915-685-8100
MR. RICHARD WRIGHT 915-685-8140

13. CERTIFICATION: - I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which currently exist; that the statements made in this plan are to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by Pogo Producing company, its contractors/subcontractors is in the conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provision of U.S.C. 1001 for the filing of a false statement.

NAME : Joe T. Janica
DATE : 04/04/00
TITLE : Agent

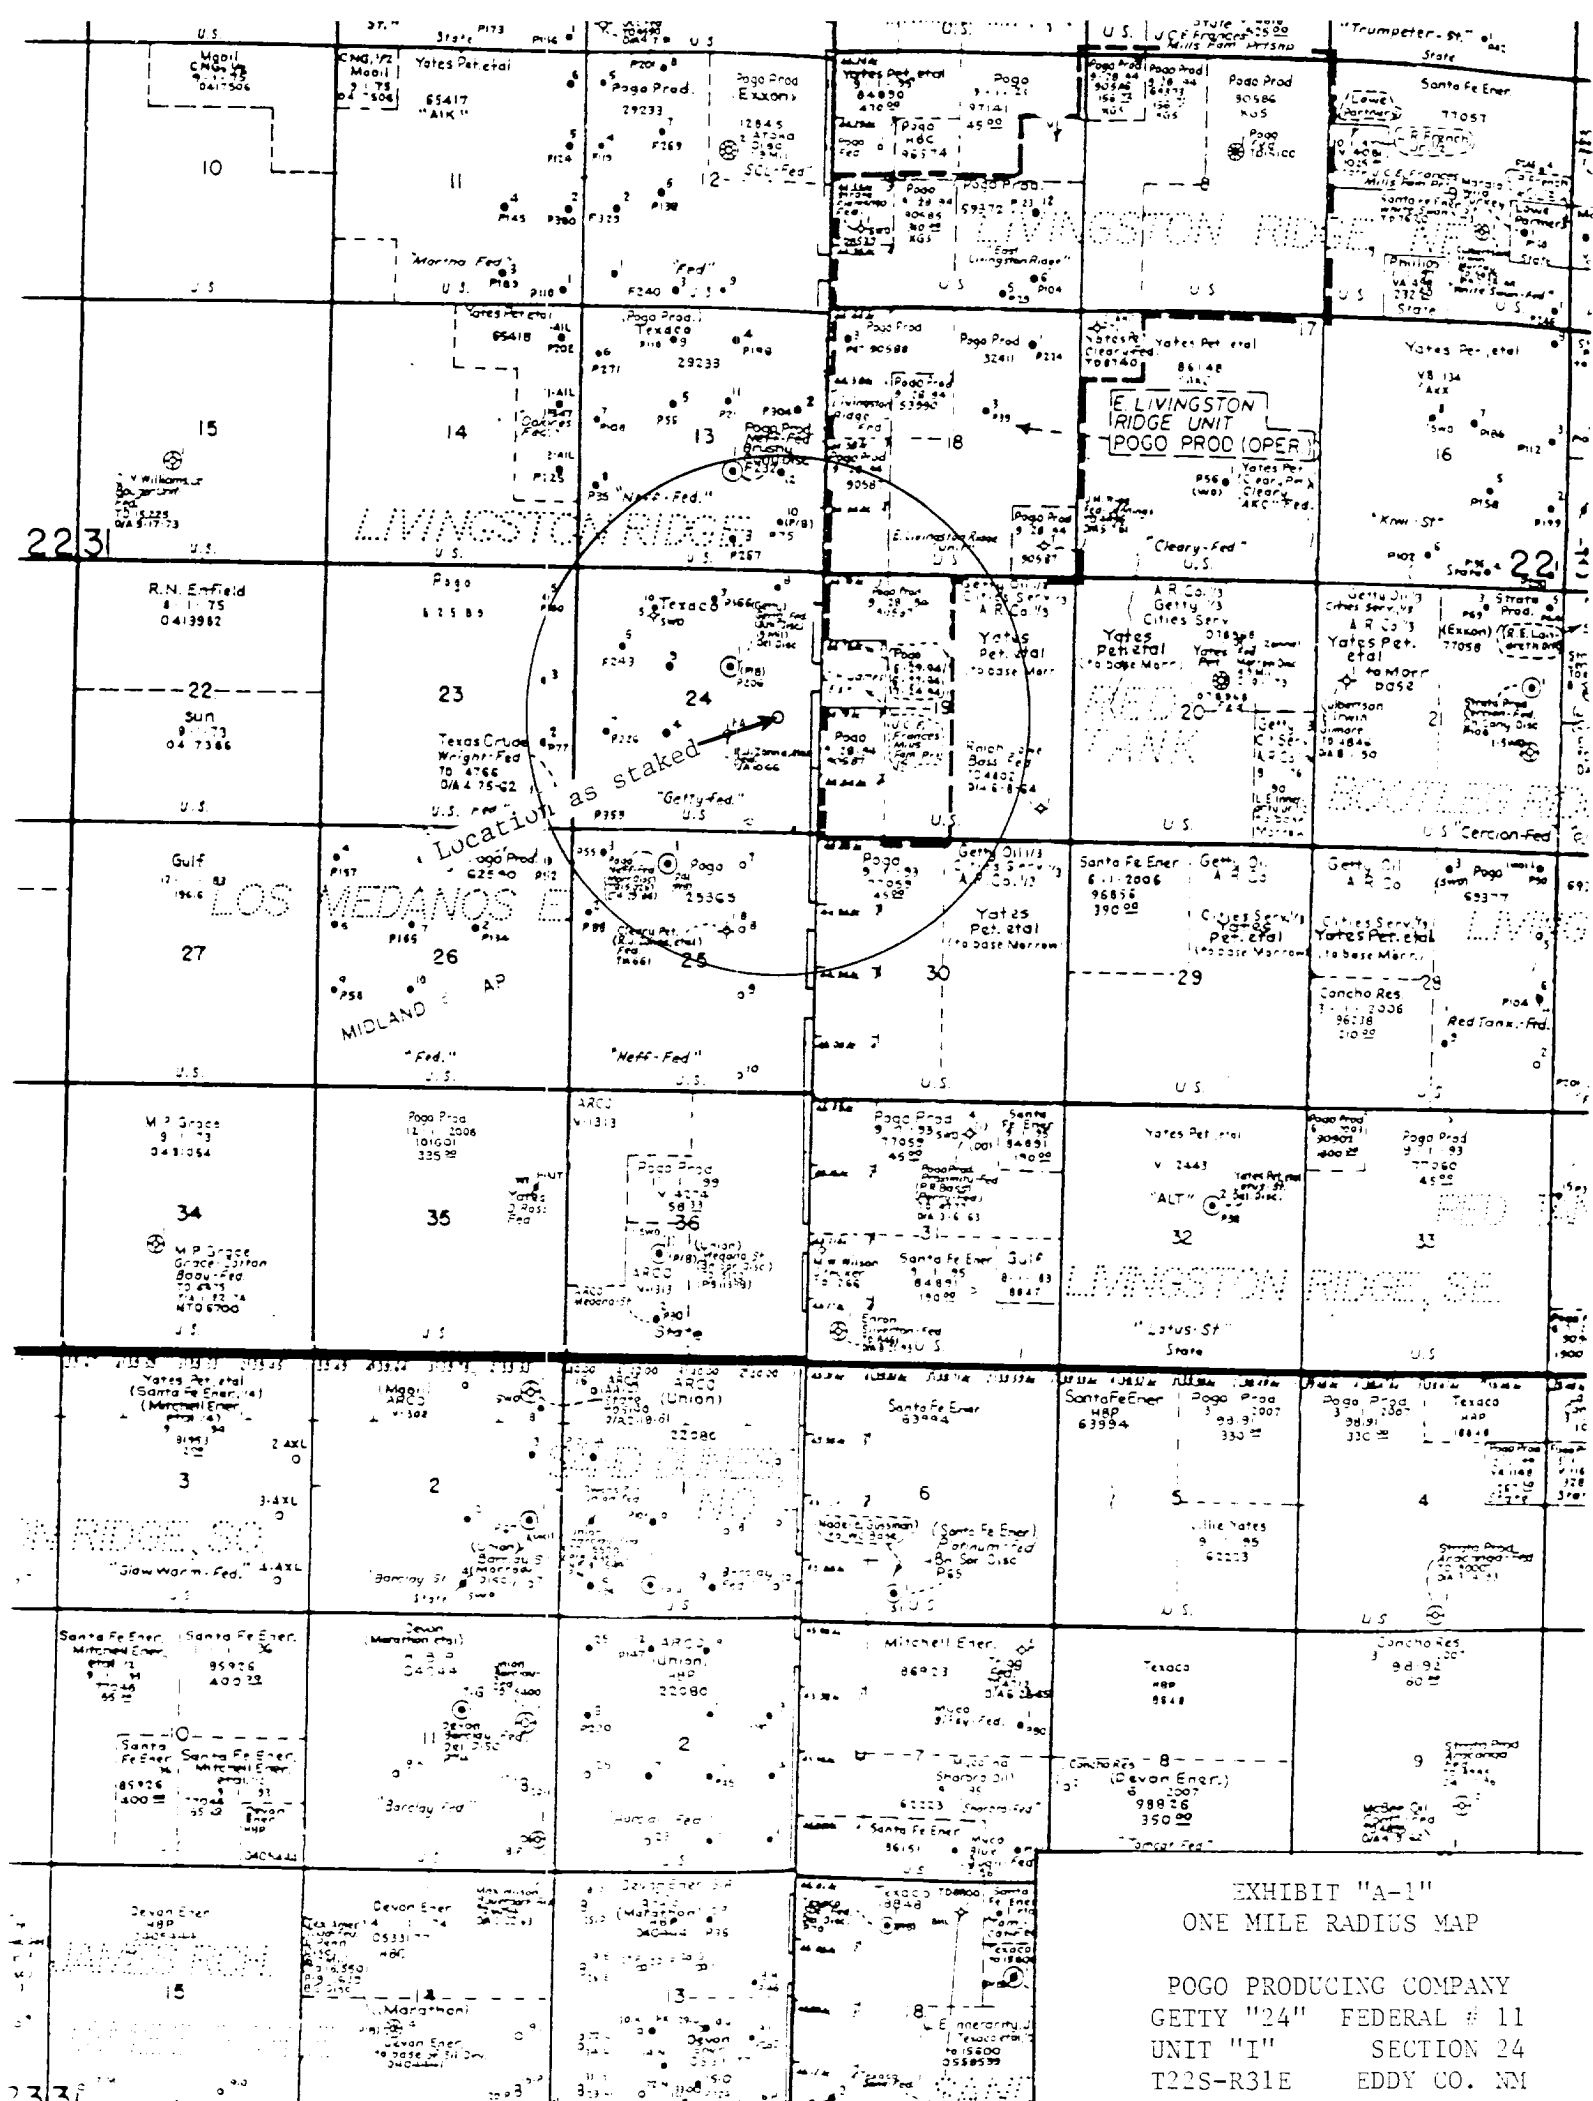

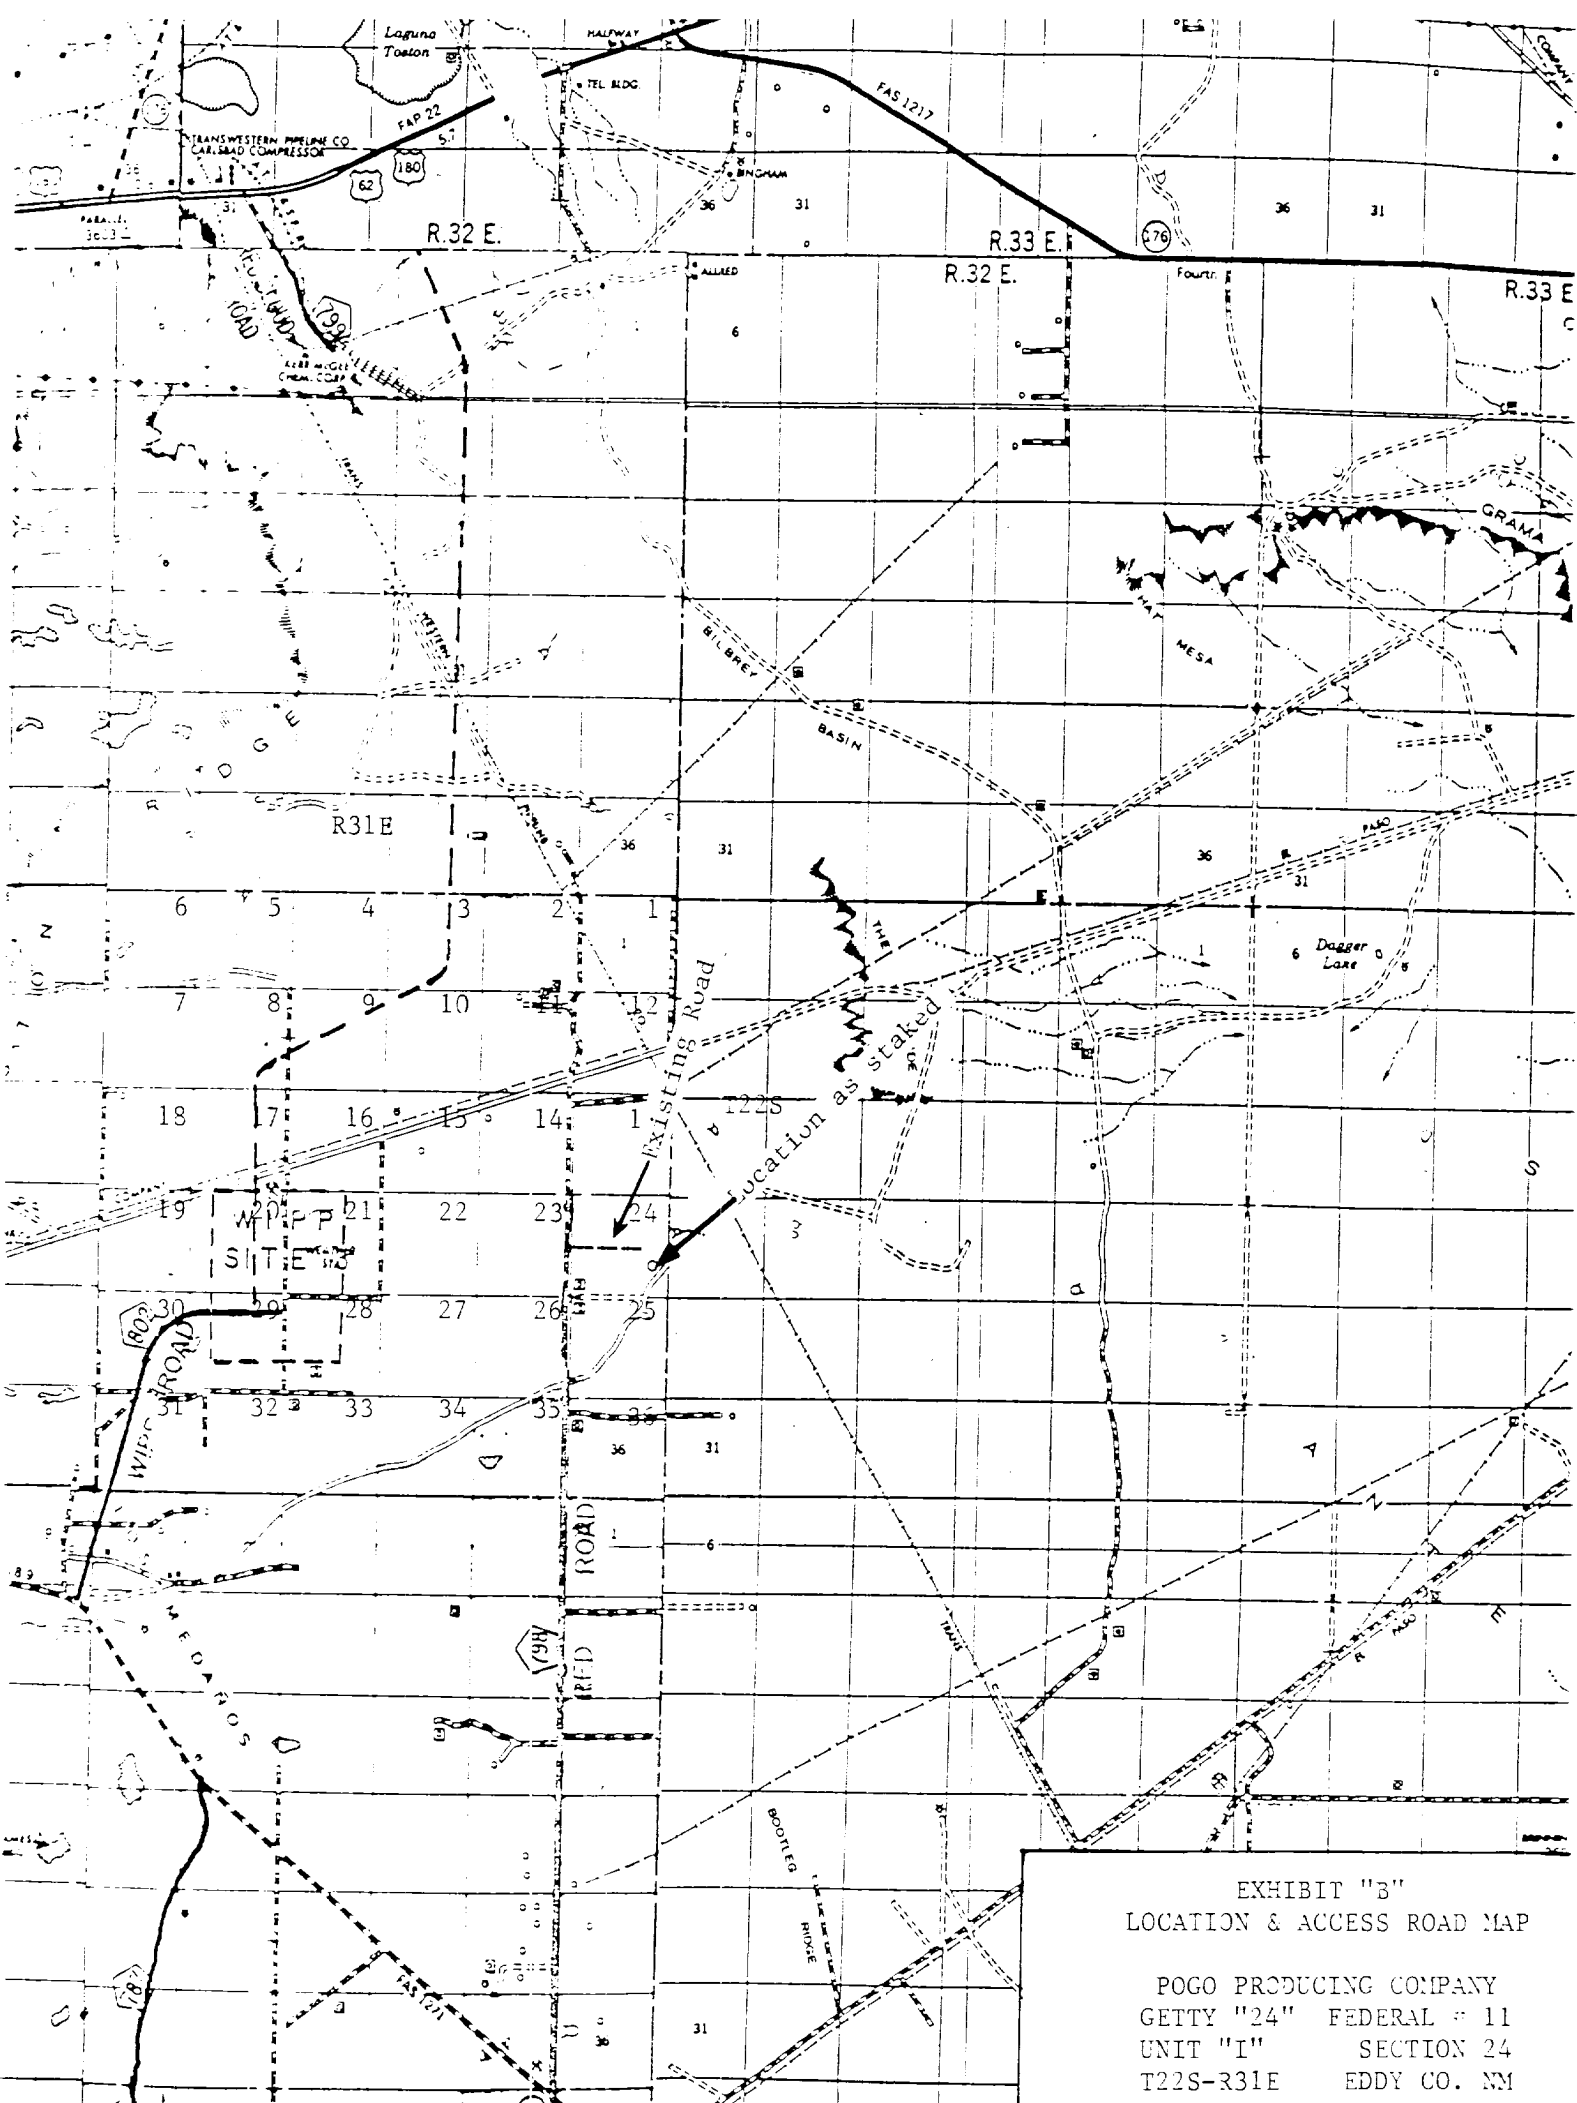


EXHIBIT "B"
LOCATION & ACCESS ROAD MAP

POGO PRODUCING COMPANY
GETTY "24" FEDERAL # 11
UNIT "I" SECTION 24
T22S-R31E EDDY CO. NM


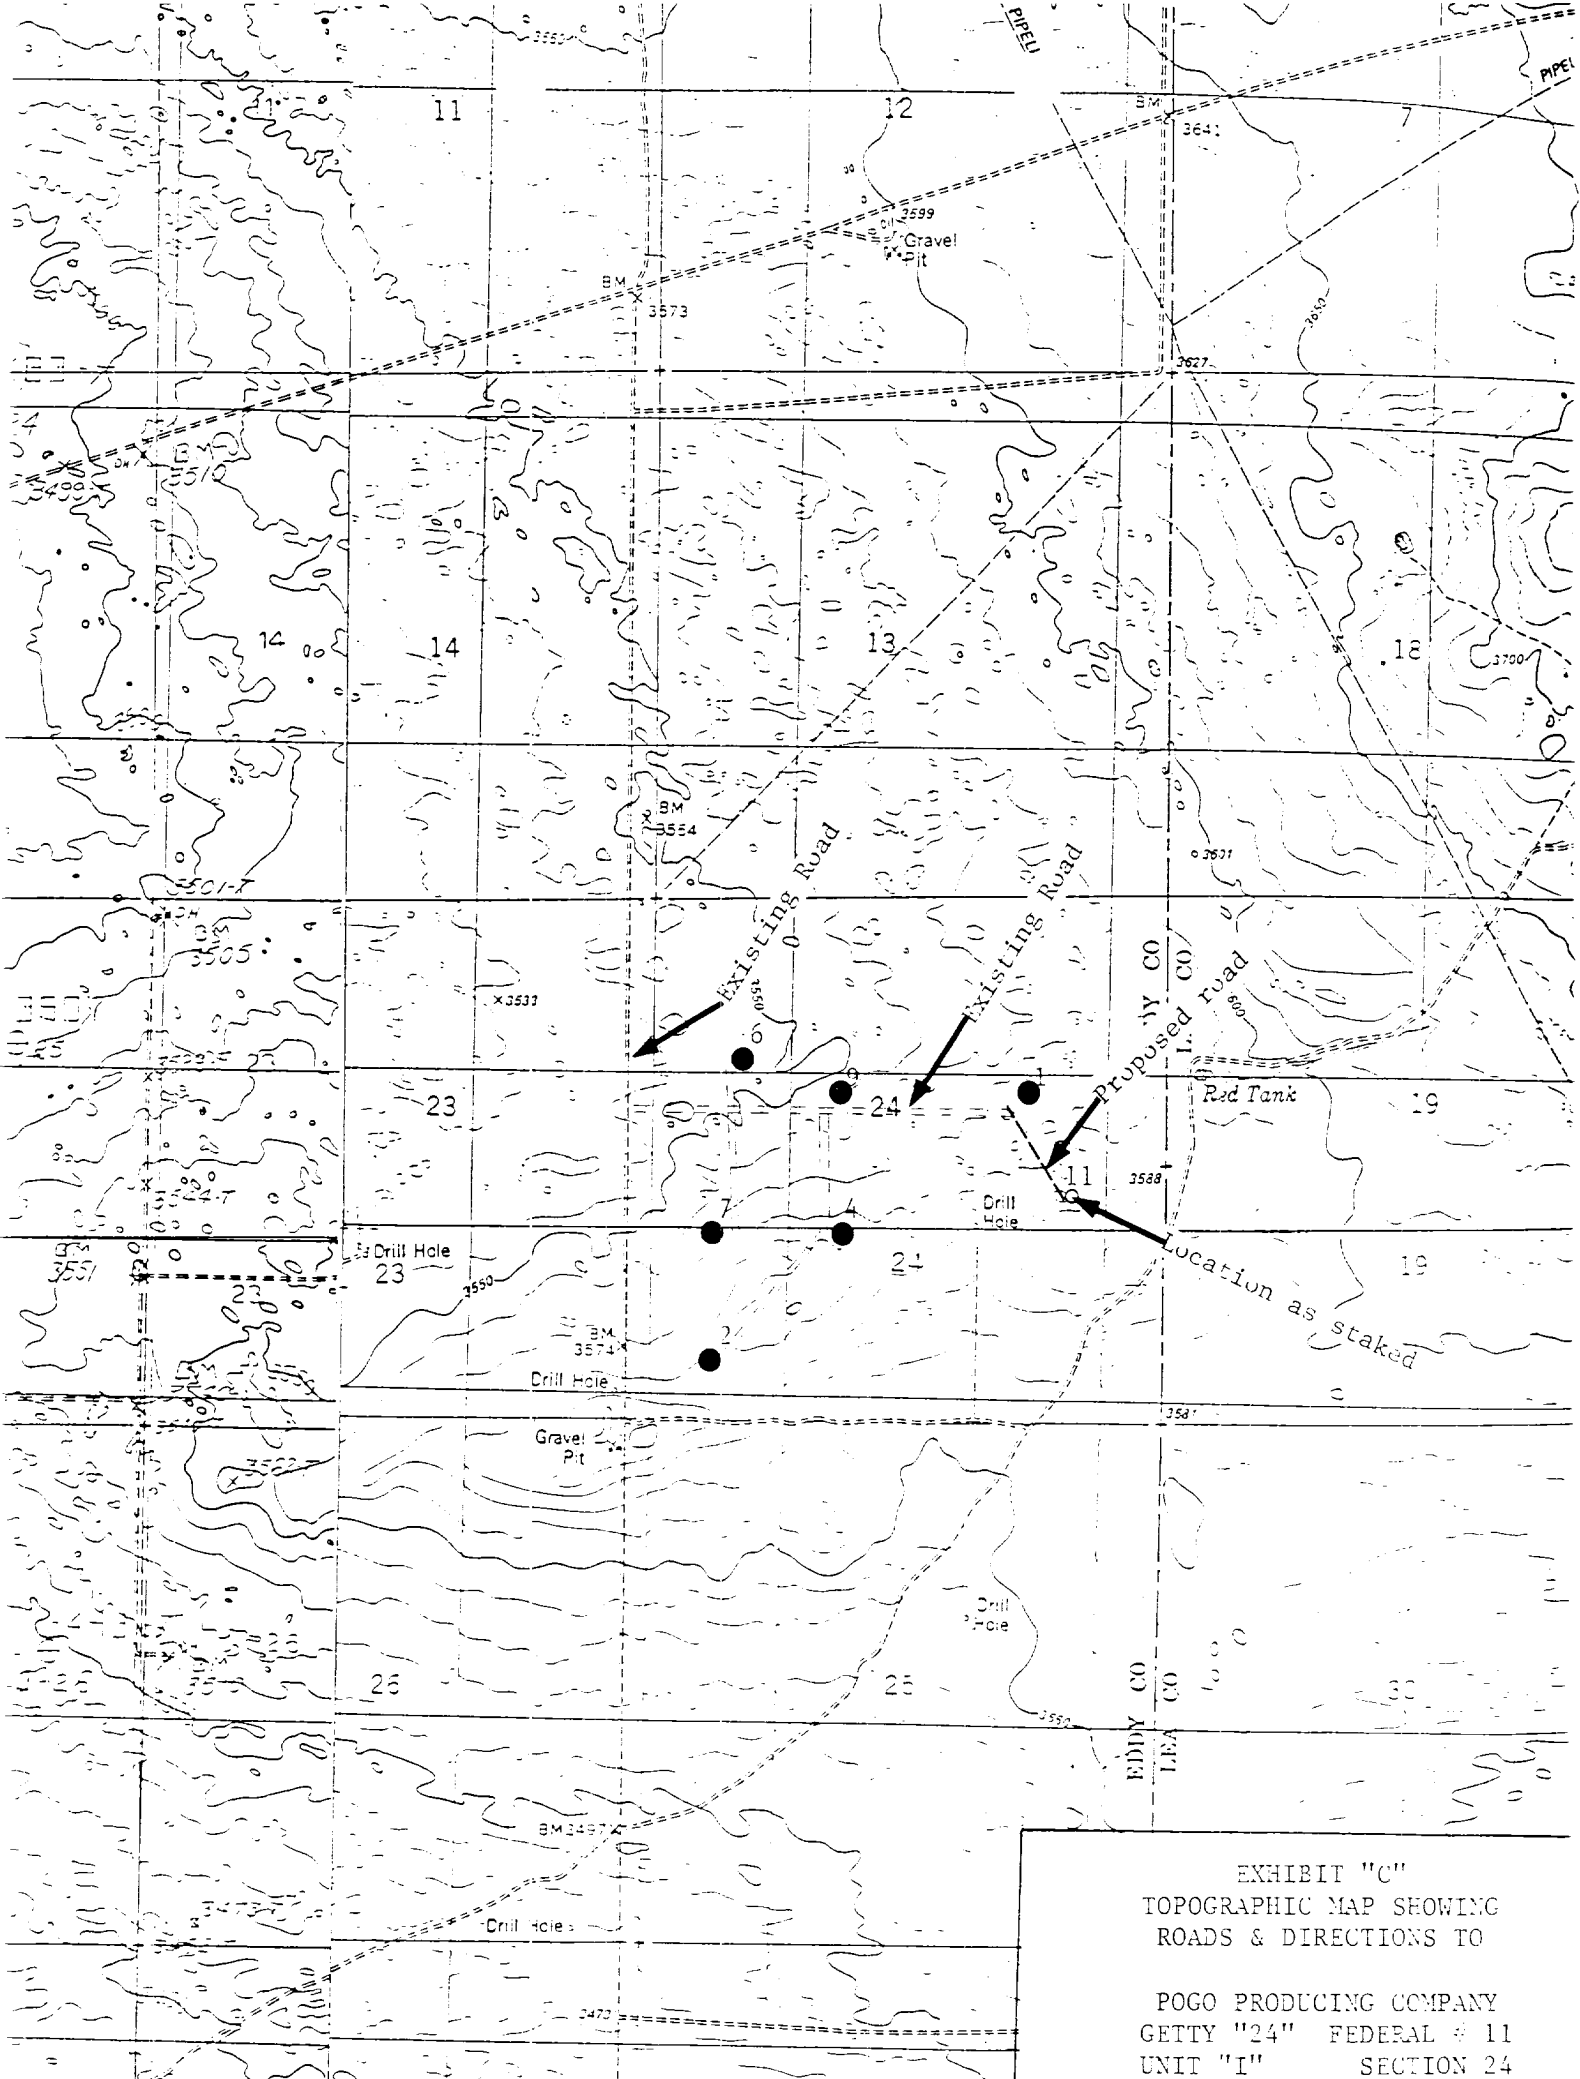


EXHIBIT "C"
TOPOGRAPHIC MAP SHOWING
ROADS & DIRECTIONS TO

POGO PRODUCING COMPANY
GETTY "24" FEDERAL # 11
UNIT "I" SECTION 24

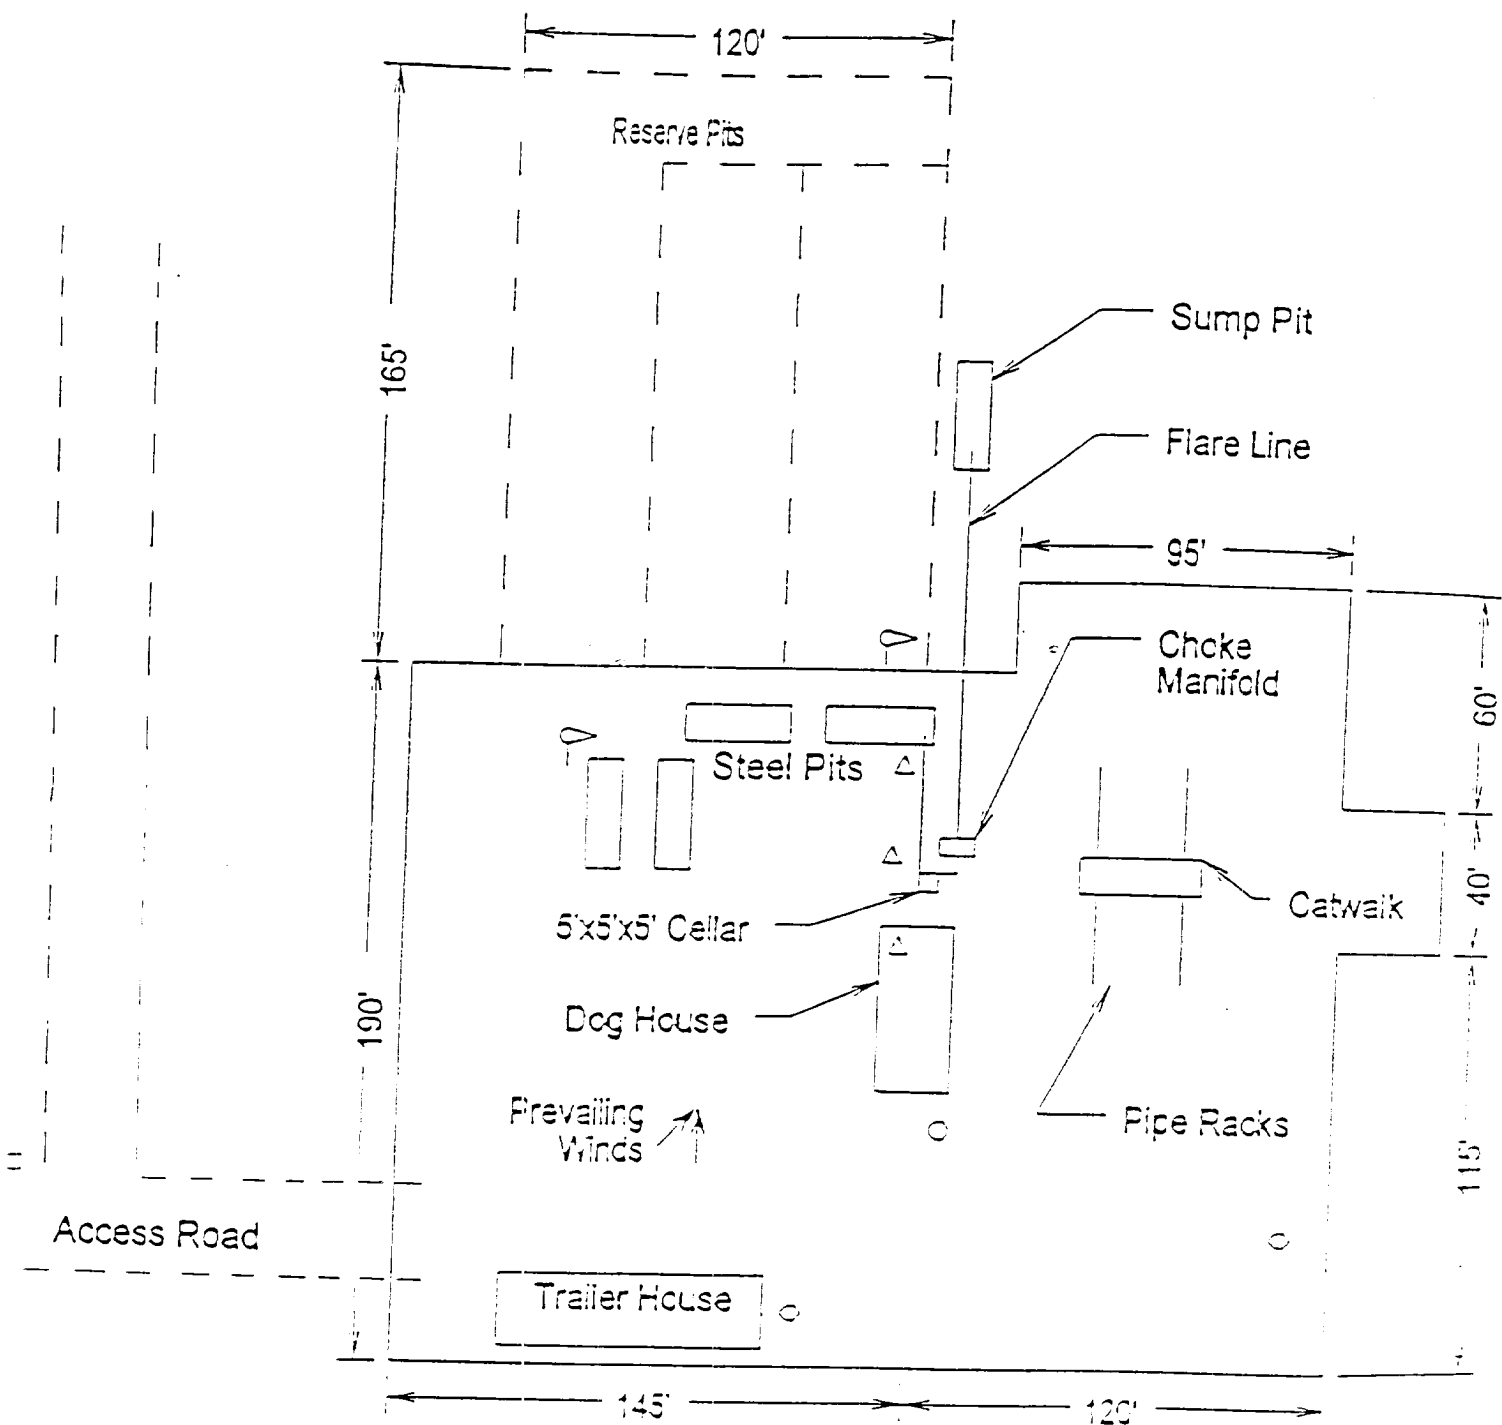

- Wind Direction Indicators
(wind sock or streamers)
- △ H2S Monitors
(alarms at bell nipple and shale shaker)
- Briefing Areas
- Remote EOP Closing Unit
- Sign and Condition Flags

EXHIBIT "D"
RIG LAYOUT PLAT

POGC PRODUCING COMPANY
GETTY "24" FEDERAL # 11
UNIT "I" SECTION 24
T22S-R31E EDDY CO. NM


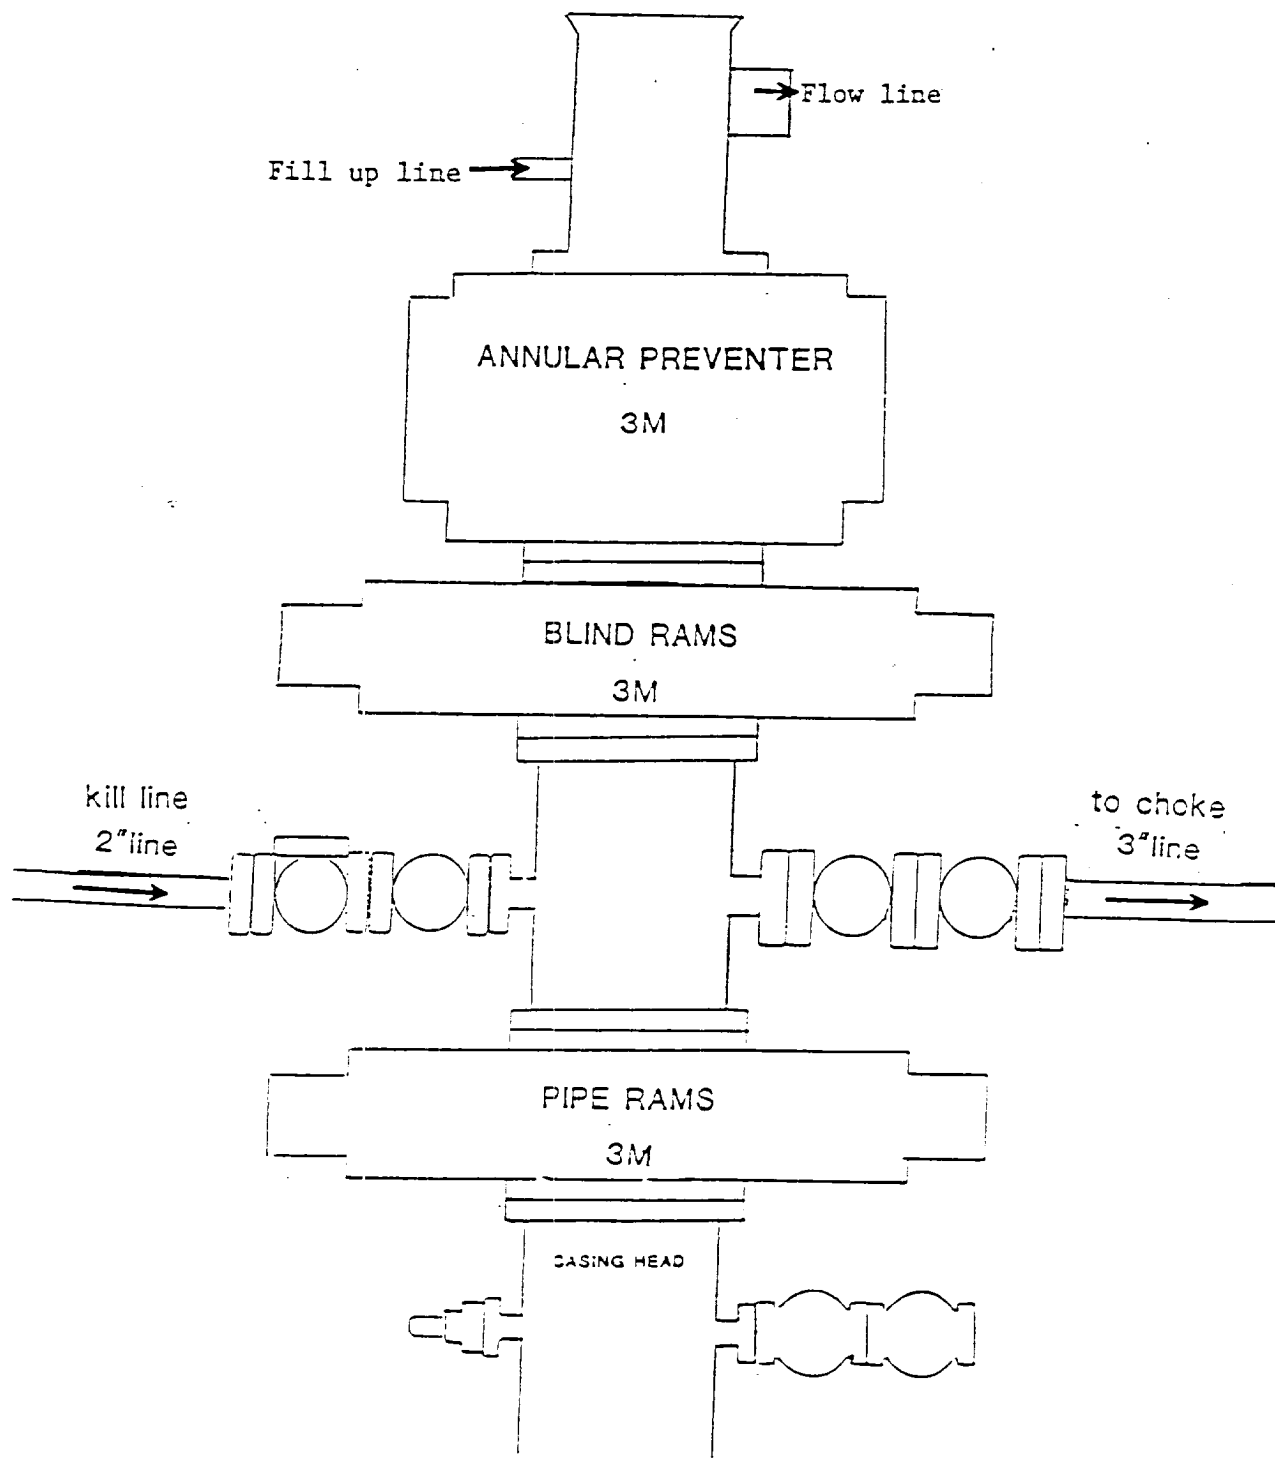


EXHIBIT "E"
SKETCH OF B.O.P. TO BE USED ON

POGO PRODUCING COMPANY
GETTY "24" FEDERAL # 11
UNIT "I" SECTION 24
T22S-R31E EDDY CO. NM

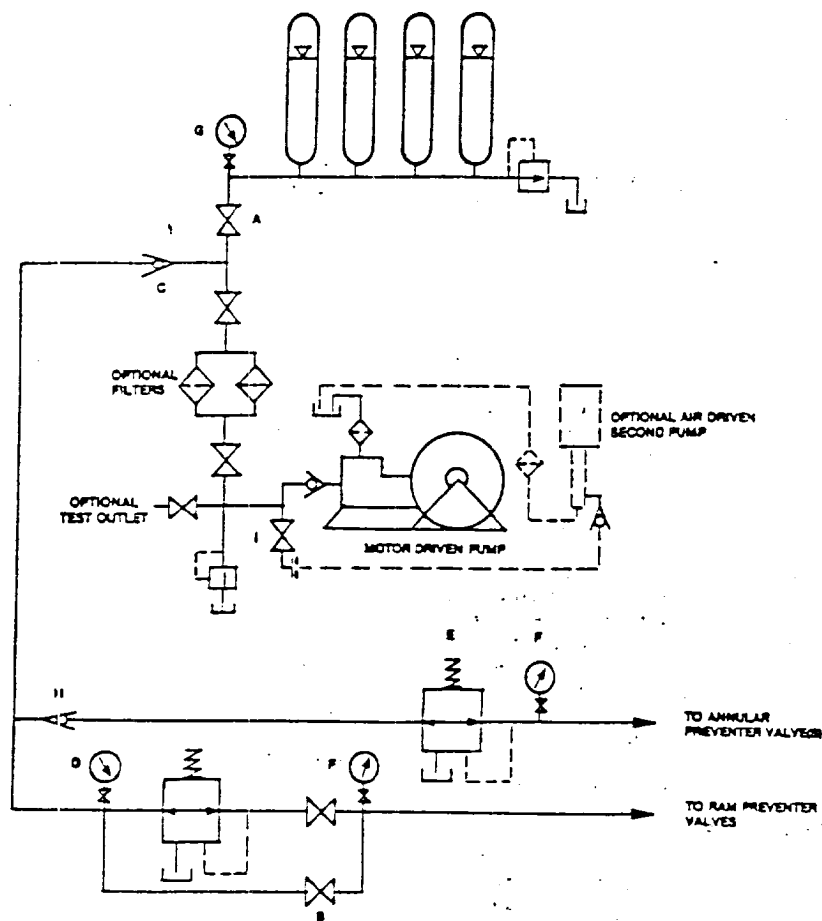

HAND AJUSTABLE CHOKE

POGO PRODUCING CO
3M CHOKE MANIFOLD

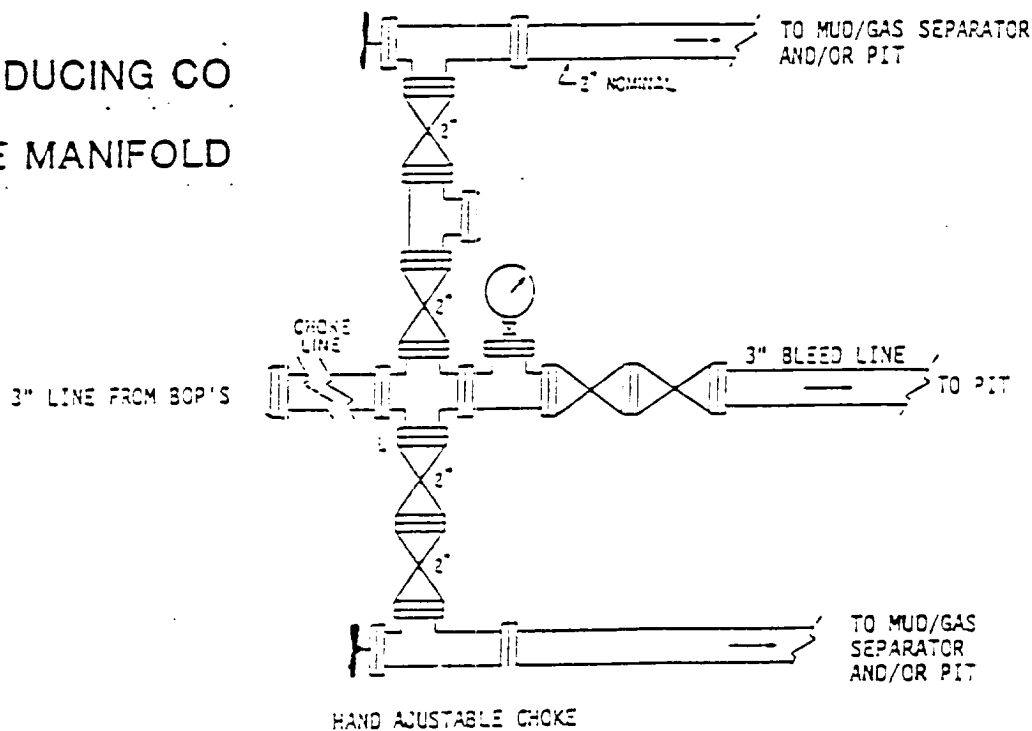


EXHIBIT "E-1"
CHOKE MANIFOLD & CLOSING UNIT

POGO PRODUCING COMPANY
GETTY "24" FEDERAL # 11
UNIT "I" SECTION 24
T22S-R31E EDDY CO. NM