


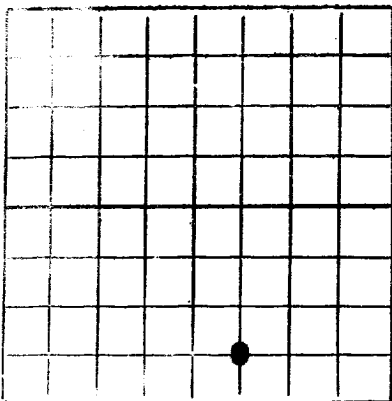

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE. If State Land submit 6 Copies

ALDRIDGE AND STROUD, INC.
(Company or Operator)

Signal-State
(Lease)

Well No. 3, in SW 1/4 of SE 1/4, of Sec. 17, T. 25 S, R. 28 E, NMPM.

Wildcat Pool, Eddy County.

Well is 660 feet from South line and 1980 feet from East line of Section 17. If State Land the Oil and Gas Lease No. is E 6280

Drilling Commenced May 16, 1956 Drilling was Completed July 15, 1956

Name of Drilling Contractor Aldridge and Stroud, Inc.

Address P. O. Box 962, Odessa, Texas

Elevation above sea level at Top of Tubing Head 3028' Ground level The information given is to be kept confidential until , 19.....

OIL SANDS OR ZONES

No. 1, from None to

No. 4, from to

No. 2, from to

No. 5, from to

No. 3, from to

No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 236' to 255' feet. 1 Bailer water per hr.

No. 2, from 1090' to 1110' feet. Hole full of water.

No. 3, from 2572' to 2583' feet. 20 gal water per hr.

No. 4, from 2600' to 2657' feet. 15 gal water per hr.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SEGE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
10 3/4"	New	32#	500'	Larkin	500'		
8 5/8"	New	30#	990'	Larkin	990'		
7"	New	30#	1510'	Larkin	1510'		

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED

RECORD OF PRODUCTION AND STIMULATION

PLUGGING RECORD:

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Cement plug from 2657' to 2475'.

Filled w/mud to 1515'.

5 sack cement plug 1515'.

Filled w/mud to 1200'.

Cement plug 5 sack @ 1200'.

Filled w/mud to 1000'.

5 sack cement plug 1000'.

Filled w/mud to 500'.

10 sack cement plug 500'.

Filled w/mud to 10'.

7 sack cement plug from 10' to top of ground.

Depth Cleaned Out

Result of Production Stimulation

ORD OF DRILL-STEM AND SPECIAL TEST

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet.
Cable tools were used from Surface feet to 2657' feet, and from _____ feet to _____ feet.

PRODUCTION

Put to Producing Dry & Abandoned 7/18/56, 19____

OIL WELL: The production during the first 24 hours was _____ barrels of liquid of which _____ % was
was oil; _____ % was emulsion; _____ % water; and _____ % was sediment. A.P.I.
Gravity _____

GAS WELL: The production during the first 24 hours was _____ M.C.F. plus _____ barrels of
liquid Hydrocarbon. Shut in Pressure _____ lbs.

Length of Time Shut in _____

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico

Northwestern New Mexico

T. Anhy.....	T. Devonian.....	T. Ojo Alamo.....
T. Salt.....	T. Silurian.....	T. Kirtland-Fruitland.....
B. Salt.....	T. Montoya.....	T. Farmington.....
T. Yates.....	T. Simpson.....	T. Pictured Cliffs.....
T. 7 Rivers.....	T. McKee.....	T. Menefee.....
T. Queen.....	T. Ellenburger.....	T. Point Lookout.....
T. Grayburg.....	T. Gr. Wash.....	T. Mancos.....
T. San Andres.....	T. Granite.....	T. Dakota.....
T. Glorieta.....	T.	T. Morrison.....
T. Drinkard.....	T.	T. Penn.....
T. Tubbs.....	T.	T.
T. Abo.....	T.	T.
T. Penn.....	T.	T.
T. Miss.....	T.	T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	5	5	Cellar	867	882	15	Sand
5	236	231	Red shale	882	894	12	Sandy Lime
236	255	19	Lime	894	935	41	Anhydrite
255	258	3	Sand	935	945	10	Sand
258	305	47	Red shale	945	1090	145	Anhydrite
305	347	42	Anhydrite & gyp	1090	1117	27	Sand
347	405	58	Lime	1117	1148	31	Anhydrite
405	434	29	Anhydrite	1148	1160	12	Lime
434	443	9	Lime	1160	1195	35	Anhydrite
443	451	8	Sand	1195	1665	470	Lime
451	453	2	Anhydrite	1665	1835	170	Salt
453	520	67	Lime	1835	1845	10	Anhydrite
520	580	60	Anhydrite	1845	1935	90	Lime
580	600	20	Lime	1935	2245	310	Salt
600	620	20	Anhydrite	2245	2484	239	Lime
620	640	20	Lime	2484	2532	48	Sand
640	645	5	Anhydrite	2532	2542	10	Black slate
645	670	25	Lime	2542	2572	30	Sand
670	745	75	Anhydrite	2572	2600	28	Sandy shale
745	775	30	Lime	2600	2657	57	Sand
775	800	25	Anhydrite	2657	T.D.		
800	820	20	Sand				
820	845	25	Blue shale				
845	855	10	Lime				
855	867	12	Anhydrite				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Company or Operator..... **ALDRIDGE & STROUD, INC.**
Name..... **W. H. Stroud, Jr.**

Address..... **P. O. Box 962, Odessa, Texas**
Position or Title..... **Secretary-Treasurer**
(Date) **7/21/56**