


RECEIVED

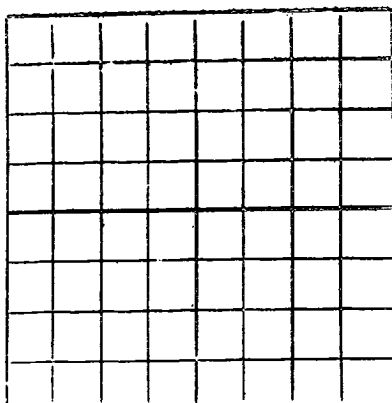

NEW MEXICO OIL CONSERVATION COMMISSION 2 5 1957
Santa Fe, New Mexico

Oil Cons. Co.
ARTESIAN

WELL RECORD

30-015-02528

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE. If State Land submit 6 Copies

AREA 640 ACRES
LOCATE WELL CORRECTLY

T. F. VanderLean (Company or Operator) State (Lease)
Well No. 6, in NW 1/4 of NW 1/4, of Sec. 16, T. 26-S, R. 28-E, NMPM.
Wildcat Pool, Eddy County.
Well is 330 feet from North line and 330 feet from West line of Section 16. If State Land the Oil and Gas Lease No. is E-3067
Drilling Commenced May 20, 1957. Drilling was Completed June 29, 1957
Name of Drilling Contractor Aldridge & Stroud, Inc.
Address P. O. Box 962, Odessa, Texas
Elevation above sea level at Top of Tubing Head unknown. The information given is to be kept confidential until Not Confidential, 19

OIL SANDS OR ZONES

No. 1, from None to No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.
No. 1, from 355 to 375 feet. 1 bailer of water per hr
No. 2, from 505 to 515 feet. 1 bailer of water per hr
No. 3, from 2506 to 2512 feet. 75 gallons of water per hr
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
10 3/4"	40#	New	283	Larkin	283		
8 5/8"	28#	New	546	Larkin	546		

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED

RECORD OF PRODUCTION AND STIMULATION

PLUGGING RECORD:

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Filled w/cement from TD 2512' to 2437'
Filled w/mud to 2000'
5 sack cement plug @ 2000'
Filled w/mud to 546'
5 sack cement plug @ 546'
Filled w/mud to 283'
5 sack cement plug @ 283'
Result of Production Stimulation Filled w/mud to bottom of cellar
5 sack cement plug at bottom of cellar

Depth Cleaned Out

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet.
 Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet.

PRODUCTION

Put to Producing Dry & Abandoned June 30, 1937

OIL WELL: The production during the first 24 hours was _____ barrels of liquid of which _____ % was
 was oil; _____ % was emulsion; _____ % water; and _____ % was sediment. A.P.I.
 Gravity _____

GAS WELL: The production during the first 24 hours was _____ M.C.F. plus _____ barrels of
 liquid Hydrocarbon. Shut in Pressure _____ lbs.

Length of Time Shut in _____

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico		OIL CONSERVATION DISTRICT		Northwestern New Mexico	
T. Anhy	T. Devonian	ARTESIA DISTRICT		T. Ojo Alamo	
T. Salt	T. Silurian			T. Kirtland-Fruitland	
B. Salt	T. Montoya	No. Copies Received		T. Farmington	
T. Yates	T. Simpson	DISTRIBUTION		T. Pictured Cliffs	
T. 7 Rivers	T. McKee	Operator		T. Point Lookout	
T. Queen	T. Ellenburger	SANTA FE		T. Mancos	
T. Grayburg	T. Gr. Wash	Proration Office		T. Dakota	
T. San Andres	T. Granite	State Land Office		T. Morrison	
T. Glorieta	T.	U. S. G. S.		T. Penn.	
T. Drinkard	T.	Transporter		T.	
T. Tubbs	T.	File		T.	
T. Abo	T.			T.	
T. Penn	T.			T.	
T. Miss	T.			T.	

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	5	5	Collar	1090	1100	50	Lime
5	25	20	Lime	1100	1130	30	Brown Lime
25	35	10	Red Rock	1130	1160	30	Lime
35	105	70	Gravel	1160	1200	40	Brown Lime
105	125	20	Shale	1200	1220	20	Lime
125	200	155	Gravel, Shale, Red Bed	1220	1270	50	Brown Lime
200	205	5	Lime & Gyp	1270	1430	160	Lime
205	300	95	Shale	1430	1495	65	Brown Lime
300	305	5	Anhydrite	1495	1500	5	Lime
305	390	85	Sand	1500	1725	225	Brown Sandy Lime
390	430	40	Gravel	1725	1870	145	Salt
430	435	5	Brown Lime	1870	1900	30	Sand
435	465	30	Sand	1900	1965	65	Lime
465	472	7	Sand	1965	2035	70	Salt
472	515	43	Sand & Anhydrite	2035	2435	400	Brown Lime
515	544	29	Salt	2435	2494	59	Lime
544	592	48	Anhydrite & Lime	2494	2498	4	Black Sand
592	605	13	Salt, Shale & Lime	2498	2512	14	Sand
605	645	40	Anhydrite & Lime				
645	685	40	Lime				
685	705	20	Anhydrite & Lime				
705	870	165	Lime				
870	930	60	Anhydrite & Lime				
930	960	30	Lime				
960	1090	130	Sandy Lime				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Company or Operator T. F. Vanderlamm Address Suite 185, Meadows Bldg. Dallas, Texas
 Name T. F. Vanderlamm Position or Title _____