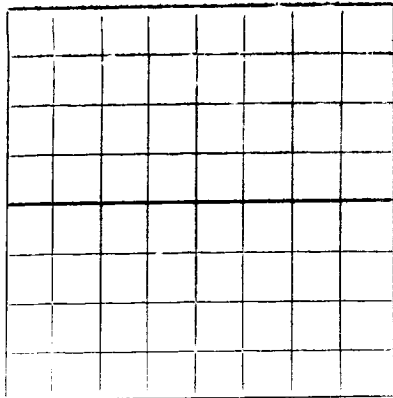


NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE.

AREA 640 ACRES
LOCATE WELL CORRECTLY

D.B. Scully - Independent Operator Superior Oil Co. B-10681
(Company or Operator) (Lease)

Well No. 1, in NW 1/4 of SE 1/4, of Sec. 32, T. 25-S., R. 29-E., NMPM.
Wildcat Pool, Eddy County.

Well is 1980 feet from East line and 1980 feet from South line
of Section 32. If State Land the Oil and Gas Lease No. is B-10681

Drilling Commenced July 21, 1950. Drilling was Completed October 18, 1950.

Name of Drilling Contractor Martin Drilling Co. 2008 Princeton Ave., Midland, Texas or
Address 103 W. Francis, Carlsbad, N.M.

Elevation above sea level at Top of Tubing Head 5008 Ft. The information given is to be kept confidential until
19.

OIL SANDS OR ZONES

No. 1, from to No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 298 to 505 feet.
No. 2, from 1110 to 1114 feet. 8 Bailers per Hr.
No. 3, from 1235 to 1245 feet. 2 Bailers per Hr.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
10-3/4"	40.5	New	516 Ft.	Tex. Pat.	516 Ft.	None	To shut off Water
7"	20	Used	1260 "	" "	1260 "	"	" " "

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
12"	10-3/4"	516 Ft.	None	Set on Shoulder	Natural	
8"	7"	1260 "	"	" " "	"	

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Result of Production Stimulation

Depth Cleaned Out

RECORD OF DRILL-STEM AND SPECIAL TESTS 3

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from.....feet to.....feet, and from.....feet to.....feet.
Cable tools were used from.....Surface.....feet to.....3084.....feet, and from.....feet to.....feet.

PRODUCTION

Dry Hole

Put to Producing....., 19.....

OIL WELL: The production during the first 24 hours was.....barrels of liquid of which.....% was
was oil;% was emulsion;% water; and.....% was sediment. A.P.I.
Gravity.....

GAS WELL: The production during the first 24 hours was.....M.C.F. plus.....barrels of
liquid Hydrocarbon. Shut in Pressure.....lbs.
Length of Time Shut in.....

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico

Northwestern New Mexico

T. Anhy.....615 Ft.	T. Devonian.....	T. Ojo Alamo.....
T. Salt.....305 Ft.	T. Silurian.....	T. Kirtland-Fruitland.....
B. Salt.....2160 & 2465	T. Montoya.....	T. Farmington.....
T. Yates.....	T. Simpson.....	T. Pictured Cliffs.....
T. 7 Rivers.....	T. McKee.....	T. Menefee.....
T. Queen.....	T. Ellenburger.....	T. Point Lookout.....
T. Grayburg.....	T. Gr. Wash.....	T. Mancos.....
T. San Andres.....	T. Granite.....	T. Dakota.....
T. Glorieta.....	T.	T. Morrison.....
T. Drinkard.....	T.	T. Penn.....
T. Tubbs.....	T.	T.
T. Abo.....	T.	T.
T. Penn.....	T.	T.
T. Miss.....	T.	T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	55	55	Surface Sands & Gravel	2924	2988	64	Sand-Gray
55	76	21	Red Beds-strks Gypsum	2988	3025	37	Sand-Gray
76	90	14	Red Beds-strks Gypsum	3025	3084	59	Sand-Gray-Shaley
90	198	108	Shale-Red Beds	TOTAL DEPTH 3084'			
198	298	100	Shale-strks Anhydrite				
298	305	7	Water Sand				
305	516	211	Salt				
516	615	99	Salt-strks Anhy.				
615	800	185	Anhydrite				
800	1002	202	Anhydrite-strks Lime				
1002	1024	22	Lime, Sandy				
1024	1080	56	Shale-strks Lime				
1080	1110	30	Anhydrite				
1110	1114	4	Water				
1114	1465	351	Anhydrite				
1465	1635	170	Anhydrite				
1635	1644	9	Anhy.-Limey-Slight Odor				
1644	2160	516	Anhydrite-strks Lime				
2160	2324	164	Salt				
2324	2465	141	Anhydrite				
2465	2693	228	Salt				
2693	2877	184	Anhydrite				
2877	2890	13	Anhydrite-limey-Bl. Lime				
2890	2924	34	Anhydrite-limey-darker				
2924			Top Delaware Sand				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

October 22 1956

(Date)

Company or Operator.....D.B.Scully.....

Address.....309-20th.St., Manhattan Beach, Calif.

Name.....D.B.Scully.....

Position or Title.....Independent Operator.....