

DEPARTMENT OF THE INTERIOR (Reverse side)
GEOLOGICAL SURVEY

5. LEASE DESIGNATION AND SERIAL NO.
NM-0558959

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

PR-Federal 4

9. WELL NO.

1

10. FIELD AND POOL, OR WILDCAT

Washington Ranch Morrow

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

Sec. 4 T26S R24E

12. COUNTY OR PARISH 13. STATE

Eddy

New Mexico

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

Approved May 17, 1972

6780 KB

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF ☐

FRACTURE TREAT ☐

SHOOT OR ACIDIZE ☐

REPAIR WELL ☐

(Other) ☐

PULL OR ALTER CASING ☐

MULTIPLE COMPLETE ☐

ABANDON* ☐

CHANGE PLANS ☐

SUBSEQUENT REPORT OF:

WATER SHUT-OFF ☐

FRACTURE TREATMENT ☐

SHOOTING OR ACIDIZING ☐

(Other) ☐

REPAIRING WELL ☐

ALTERING CASING ☐

ABANDONMENT* ☐

Casing & Cementing Operations X

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.) *

An eleven inch hole was drilled to 725' which was approximately 225' into the Delaware Formation and 8-5/8" 24#/ft. casing was run to total depth. This surface casing string was cemented with 325 sacks cement and an estimated 50 sacks circulated. After WOC 24 hours the double ram blow-out preventor and Hydril Blow-Out preventors were nipped up, the casing was tested to 1000 psi and held O.K. A 7-7/8" hole was drilled to a total depth of 7125 feet and 5-1/2" casing of 14#/ft and 15.5#/ft. was run to total depth and cemented with 300 sacks Class C cement with 8# salt per sack and 3/4 of 1% CFR2. The production string was tested to 3000 psi and held OK. Completion attempt will be made in the Morrow Sand.

RECEIVED

JUN 20 1972

U. S. GEOLOGICAL SURVEY
ARTESIA, NEW MEXICO

18. I hereby certify that the foregoing is true and correct

SIGNED

J. T. Perry

TITLE

Agent


DATE

6/19/72

(This space for Federal or State office use)

TITLE

DATE

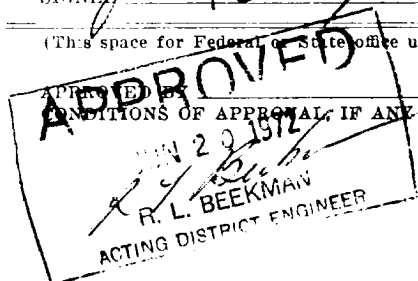

*See Instructions on Reverse Side