


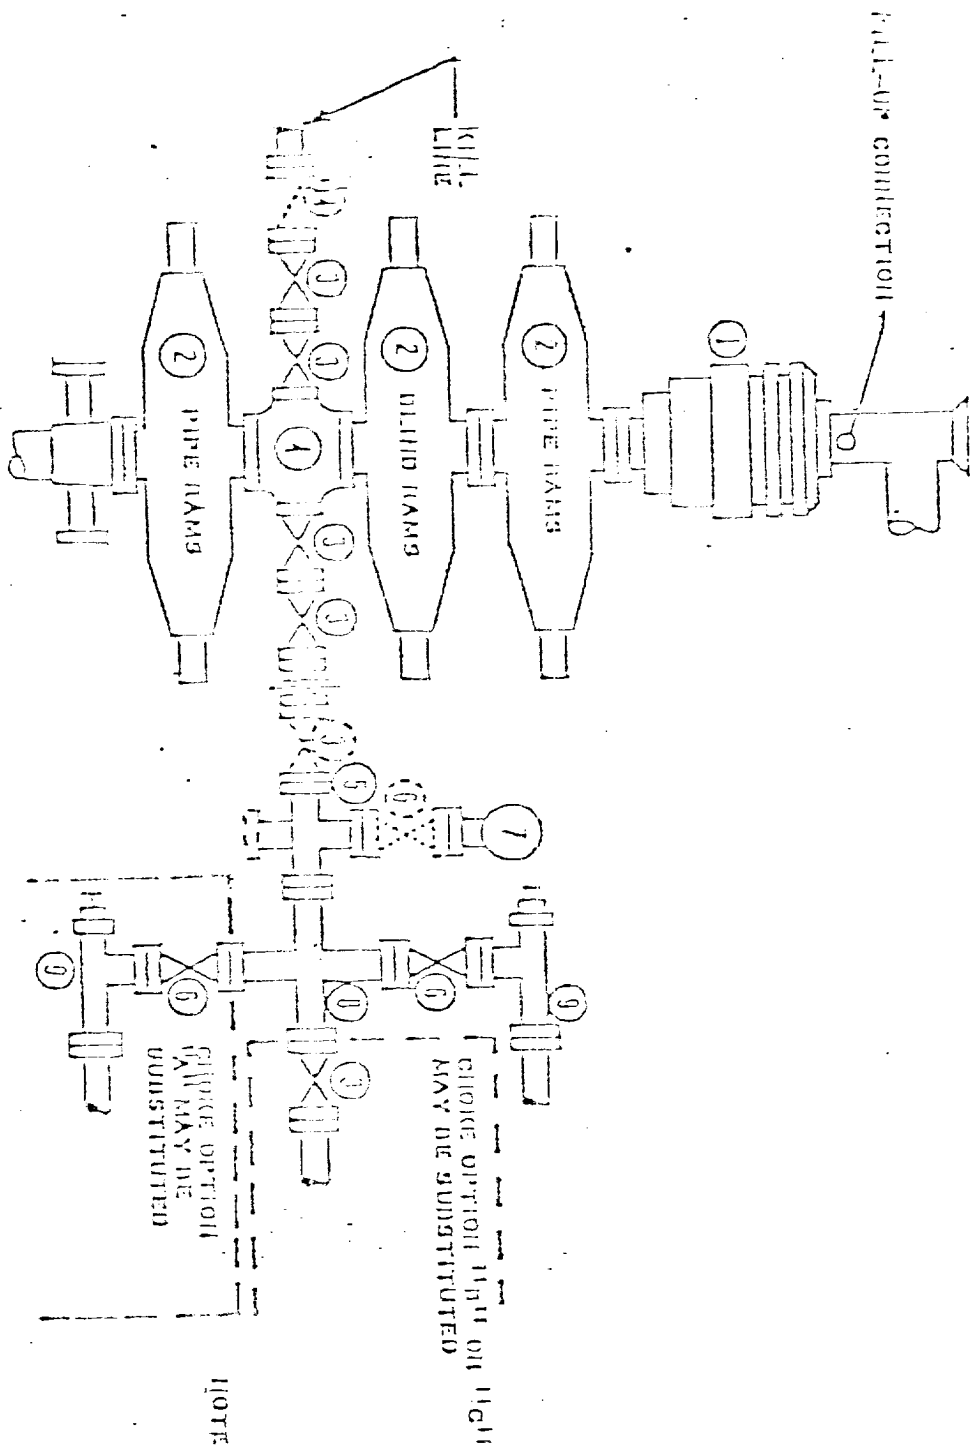

NOTES

1. 6000 PSI WP OR BETTER CLAMP HOOD MAY BE SUBSTITUTED FOR FLANGES
2. ONE ADJUSTABLE CHOICE MAY BE REPLACED WITH A POSITIVE CHOICE
3. VALVES MAY BE EITHER HAND OR POWER OPERATED BUT, IF POWER OPERATED, THE VALVES FLANGED TO THE HOOD MUST BE CAPABLE OF BEING OPERATED MANUALLY OR CLOSE OR PO FAILURE AND BE CAPABLE OF BEING OPENED MANUALLY

- ① 6000 PSI WP OR BETTER CLAMP HOOD
- ② 311 GEN, 1500 VALVE
- ③ GEN, 1500 DRILLING 5000
- ④ 311 GEN, 1500 X 211 GEN, 1500 STEEL TIE
- ⑤ 211 GEN, 1500 VALVE
- ⑥ 211 MUD PRESSURE GAUGE
- ⑦ 311 GEN, 1500 X 211 GEN, 1500 STEEL CROSS
- ⑧ 211 GEN, 1500 ADJ, CHOICE
- ⑨ 211 GEN, 1500 ADJ, CHOICE ON 2 GEN, 1500 RISER VALVE OR SIDE OUTLET OF 211 GEN, 1500 DIESEL TEE
- ⑩ ADAPTER, 211 GEN, 1500 X 10,6 FLANGE MATING ⑫ INLET
- ⑪ 10,600 LB WP REMOTE CHOICE
- ⑫ HYDRAULIC CHOICE, 2500 LB WP OR BETTER
- ⑬ 311 GEN, 1500 CHECK VALVE

5000 PSI WORKING PRESS
BLOWOUT PREVENTER
(SERIES 1500 FLANGES ON