


OPTIONAL EQUIPMENT

Exhibit "B"

Soto1 Federal No.1

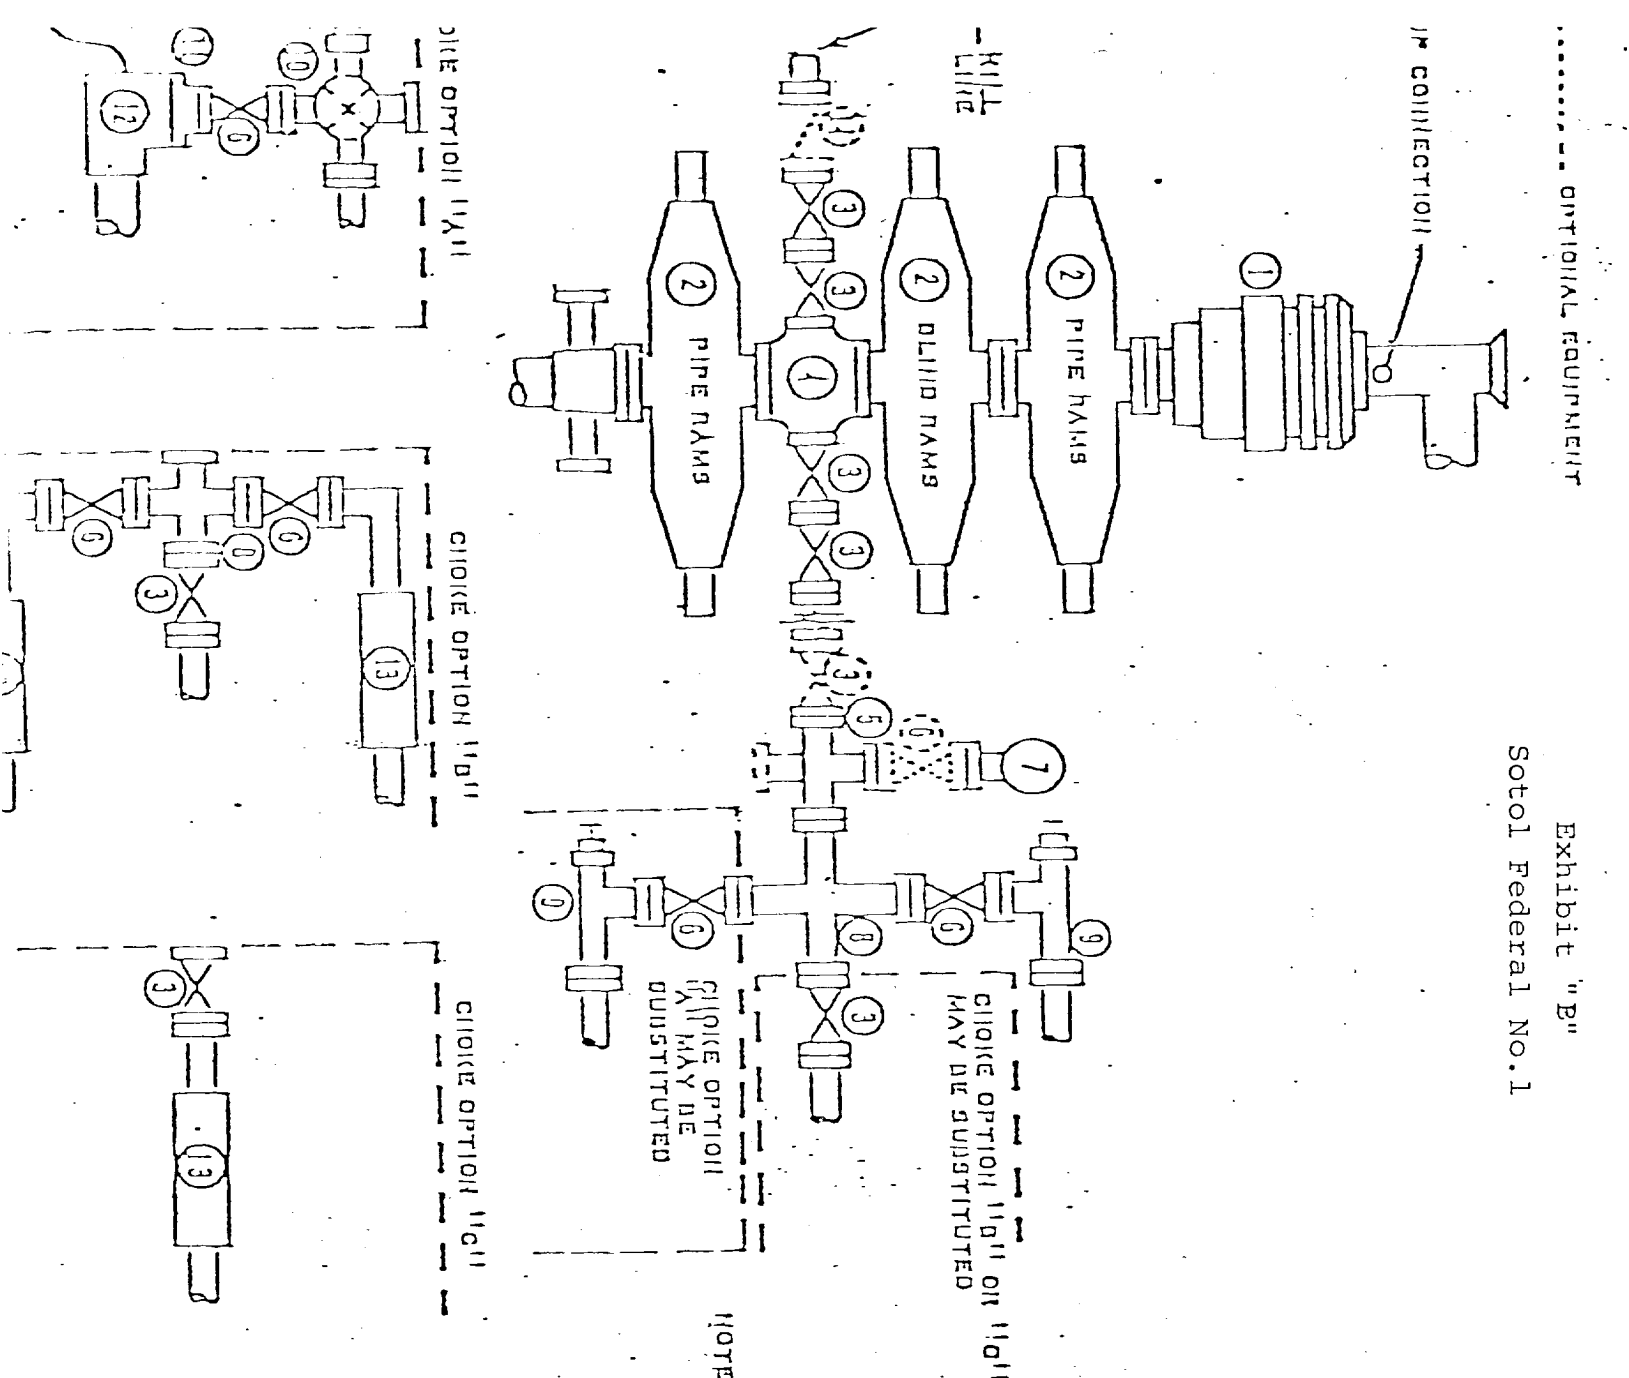

NOTES

1. 5000 PSI WP ON BETTER CLAMP, 1100 PSI MAY BE SUBSTITUTED FOR FLANGES
2. ONE ADJUSTABLE CLUTCH MAY BE REPLACED WITH A POSITIVE CLUTCH
3. VALVES MAY BE EITHER HAND OR POWER, OPERATED BUT, IF POWER OPERATED, THE VALVES FLANGED TO THE TOP MUST BE CAPABLE OF BEING OPERATED AND CLOSED MANUALLY ON CLOSE UP POWER FAILURE AND BE CAPABLE OF BEING OPERATED MANUALLY

- ② GEN, 1000 PAM-TYPE 1101 (8)
- ③ 3" GEN, 1500 VALVE
- ④ GEN, 1000 DRILLING SPOOL
- ⑤ 3" GEN, 1500 X 2" GEN, 1500 STEEL TEE
- ⑥ 2" GEN, 1500 VALVE
- ⑦ 2" MUD PRESSURE GAUGE
- ⑧ 3" GEN, 1500 X 2" GEN, 1500 STEEL CROSS
- ⑨ 2" GEN, 1500 ADJ. CLUTCH
- ⑩ 2" GEN, 1500 ADJ. CLUTCH OR 2" GEN, 1500 HISEN VALVE OR SIDE OUTLET OF 2" GEN, 1500 STEEL TEE
- ⑪ ADAPTER, 2" GEN, 1500 X 10,000 LB WP FLANGE MATING ⑫ INLET
- ⑫ 10,000 LB WP REMOTE CLUTCH
- ⑬ HYDRAULIC CLUTCH, 2500 LB WP ON BETTER
- ⑭ 3" GEN, 1500 CLUTCH VALVE

5000 PSI WORKING PRESSURE
BLOWOUT PREVENTER 1100K-UP
(SERIES 1500 FLANGES OR BETTER)