

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or to place a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ well gas ☒ well other ☐ **NOV 2 1982**
2. NAME OF OPERATOR
The Superior Oil Company ✓ O. C. D.
3. ADDRESS OF OPERATOR
ARTESIA, OFFICE
P. O. Box 3901, Midland, TX 79702
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1980' FNL, 1980' FWL of Sec. 12
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH: Same
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


- REQUEST FOR APPROVAL TO: SUBSEQUENT REPORT OF:
- | | | |
|----------------------|--------------------------|-------------------------------------|
| TEST WATER SHUT-OFF | <input type="checkbox"/> | <input type="checkbox"/> |
| FRACTURE TREAT | <input type="checkbox"/> | <input type="checkbox"/> |
| SHOOT OR ACIDIZE | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| REPAIR WELL | <input type="checkbox"/> | <input type="checkbox"/> |
| PULL OR ALTER CASING | <input type="checkbox"/> | <input type="checkbox"/> |
| MULTIPLE COMPLETE | <input type="checkbox"/> | <input type="checkbox"/> |
| CHANGE ZONES | <input type="checkbox"/> | <input type="checkbox"/> |
| ABANDON* | <input type="checkbox"/> | <input type="checkbox"/> |
- (other) Add perfs in Atoka

5. LEASE
NM-18042
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
7. UNIT AGREEMENT NAME
8. FARM OR LEASE NAME
Soto1 Federal
9. WELL NO.
1
10. FIELD OR WILDCAT NAME
Undesignated (Atoka)
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 12, T24S, R32E
12. COUNTY OR PARISH
Eddy
13. STATE
NM
14. API NO.
15. ELEVATIONS (SHOW DF, KDB, AND WD)
3531.5' GR

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

1. MI RU 2" perf gun, added Atoka perfs @ 14,343-14,363' w/2 JSPF, 0° phasing, perf'd @ 14,327-14,338' w/2 JSPF, 0° phasing.
2. Acidized w/6000 gals 15% HCl mixed w/4% KCl wtr + additives, tested.
3. Opened well on 22/64" ck, flow well to pits overnight.
4. Recovered load wtr, SI.
5. Tested well, prep to abandon Atoka & recomplete in Strawn.

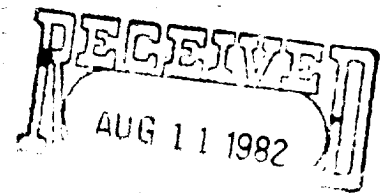

OIL & GAS
U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

Subsurface Safety Valve: Manu. and Type

Set @ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED G. E. Tate TITLE Prod Supt DATE 8-10-82

APPROVED BY DAVID R. GLASS (ORIG. SGD.) DATE NOV 1 1982

U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

*See Instructions on Reverse Side