


- | | <u>DRILLING</u> | <u>RUNNING CASING</u> |
|-----------|-----------------|-----------------------|
| UPPER RAM | DRILL PIPE | CASING |
| LOWER RAM | BLIND | BLIND |

10. CHOKE MANIFOLD, BEYOND SECOND VALVE FROM CROSS MAY BE OPTIONALLY POSITIONED OUTSIDE OF SUBSTRUCTURE.
11. EXTENSIONS AND HAND WHEELS TO BE INSTALLED AND BRACED AT ALL TIMES.
12. TWO INCH (2") LINES AND VALVES ARE PERMITTED ON THE KILL LINE.

NOTE: ALL UNMARKED VALVES MAY BE
PLUG OR GATE VALVE, METAL
TO METAL SEAL.

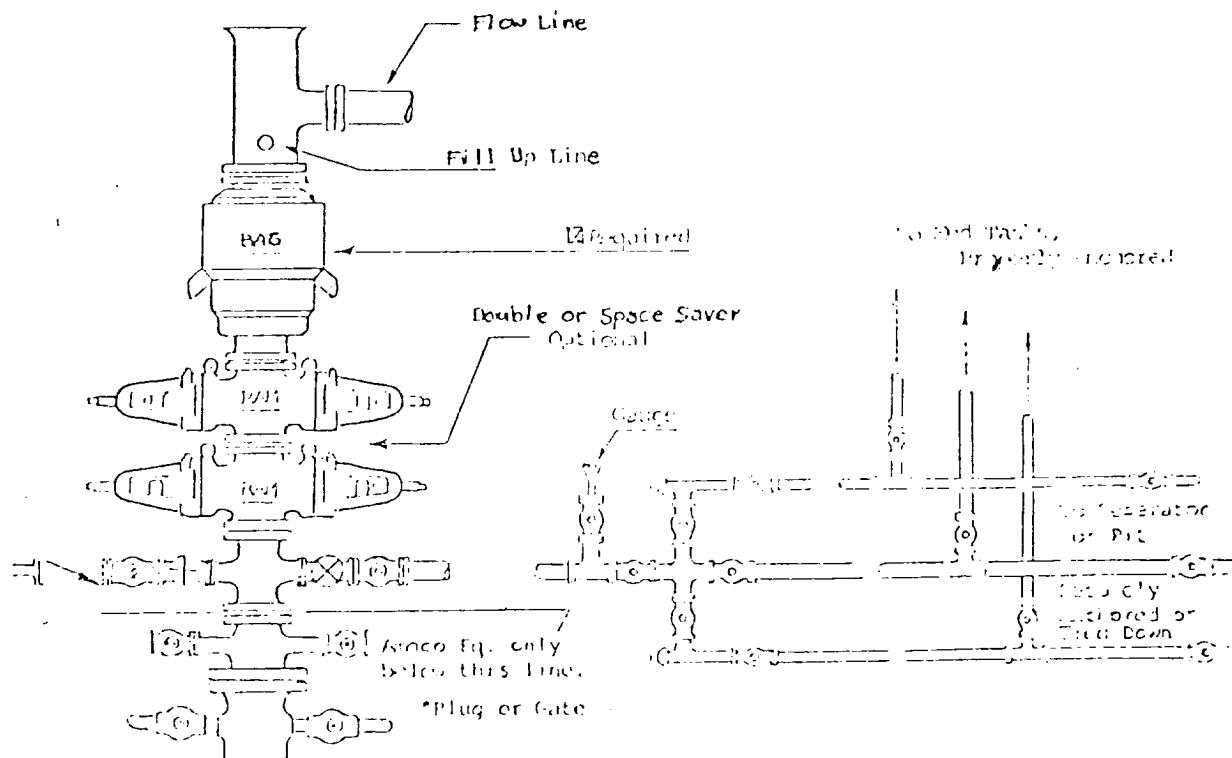

3000# W.P.