

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY
Artesia, NM 88210

Form approved.
Budget Bureau No. 42-R1424.

C/SF

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different depth.
Use "APPLICATION FOR PERMIT—" for such proposals.)

| | |
|--|--|
| 1. OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER <input type="checkbox"/> | 7. UNIT AGREEMENT NAME |
| 2. NAME OF OPERATOR Ike Lovelady, Inc. ✓ | 8. FARM OR LEASE NAME Ross Draw Federal Comm. |
| 3. ADDRESS OF OPERATOR P.O. Drawer 2666, Midland, Texas 79702 | 9. WELL NO. 1 |
| 4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.* See also space 17 below.) At surface 660' FNL & 1980' FWL of Sec. 33 | 10. FIELD AND POOL, OR WILDCAT Wildcat |
| 14. PERMIT NO. | 11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA Sec. 33, T-26-S R-30-E |
| 15. ELEVATIONS (Show whether DF, RT, GR, etc.) 4943.5 GR. | 12. COUNTY OR PARISH Eddy |
| | 13. STATE New Mexico |

Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

| NOTICE OF INTENTION TO: | | SUBSEQUENT REPORT OF: | |
|--|---|--|--|
| TEST WATER SHUT-OFF <input type="checkbox"/> | PULL OR ALTER CASING <input type="checkbox"/> | WATER SHUT-OFF <input type="checkbox"/> | REPAIRING WELL <input type="checkbox"/> |
| FRACTURE TREAT <input type="checkbox"/> | MULTIPLE COMPLETE <input type="checkbox"/> | FRACTURE TREATMENT <input type="checkbox"/> | ALTERING CASING <input type="checkbox"/> |
| SHOOT OR ACIDIZE <input type="checkbox"/> | ABANDON* <input type="checkbox"/> | SHOOTING OR ACIDIZING <input type="checkbox"/> | ABANDONMENT* <input type="checkbox"/> |
| REPAIR WELL <input type="checkbox"/> | CHANGE PLANS <input type="checkbox"/> | (Other) <input type="checkbox"/> | |

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*


2-11-82 to 2-13-82 ----- Set Blanking plug in F Nipple at 14,204'
Tested to 3500# & POH W/Tbg.

2-14-82 to 2-16-82 ----- RIH W/4½" Model "D" Pkr. Set at 14,050' Perf
w/1 9/16" Tbg gun 2 S.P.F. 14,157' to 14,167'.

2-16-82 to 2-28-82 ----- Flow test well Acidize Perfs W/2000 gals 10%
acid treated at 5250# at 2 B.P.M. F.T.P. 150#
at 225 M.C.F.D.

3-1-82 to 3-3-82 ----- Flow Test well at 100# FTP Rate 150 M.C.F.D.
w/98 B.W.P.D.

3-4-82 to 3-8-82 ----- P.O.H. W/Tbg. Set Baker CIBP at 13,990'
Dump 20' cement on Top. Perf 2 S.P.F. 13,435 to
13,482, 13,522 to 13,560'. Mill out Top
7 5/8" Liner. 3-8-82

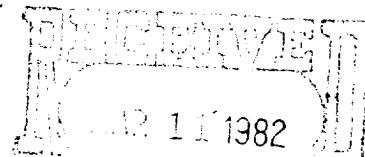

18. I hereby certify that the foregoing is true and correct

SIGNED Paul Sims

TITLE Mgr. Of Drlg. & Prod.

(This space for Federal or State office use)

APPROVED BY _____
CONDITIONS OF APPROVAL, IF ANY:

TITLE _____

