

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Draper DD
Artesia, NM 88210

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☒ gas ☐ other ☐
well well
2. NAME OF OPERATOR
J. C. Williamson
3. ADDRESS OF OPERATOR
P. O. Box 16 Midland, Texas 79702
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 460' FSL & 660' FEL
AT TOP PROD. INTERVAL: 460' FSL & 660' FEL
AT TOTAL DEPTH: 460' FSL & 660' FEL


16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

- TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) Run & Set Casing

SUBSEQUENT REPORT OF:

- ☐
☐
☐
☐
☐
☐
☐
☐
☐
☒

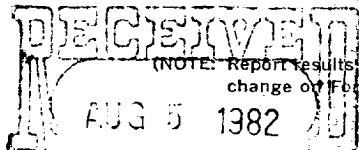

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

OIL & GAS
U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Run and Set 8 5/8" casing.

7/31/82 Ran (12-Joints of 32# K55 STC casing 507.34') plus (59 joints of 24# K55 STC 2449.23') Total of 71 jts set at 2900 feet w/150 sacks of Class "C" cement with 2% CaCl. Plug down at 7:00PM on 7/31/82.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED _____ TITLE Production Secretary DATE 8/4/82

ACCEPTED FOR RECORD

(This space for Federal or State office use)

(ORIG. SGD.) DAVID R. GLASS

APPROVED BY _____ DATE _____
CONDITIONS OF APPROVAL IF ANY:

OCT 15 1982

U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

See Instructions on Reverse Side