

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT


CATE-
on re-

Budget Bureau No. 1004-0135
Expires August 31, 1985

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input type="checkbox"/>	2. NAME OF OPERATOR RHYMES DRILLING CO., INC. ✓	3. ADDRESS OF OPERATOR P O BOX 729, ROSWELL, NM 88201	4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.) See also space 17 below.) At surface 572' FNL & 1715' FWL OF SECTION (UNIT C) NE¼ NW¼	5. LEASE DESIGNATION AND SERIAL NO. LC61497 LC061497	6. IF INDIAN, ALLOTTEE OR TRIBE NAME	7. UNIT AGREEMENT NAME	8. FARM OR LEASE NAME Gulf Federal	9. WELL NO. #3	10. FIELD AND POOL, OR WILDCAT Brushy Draw Delaware	11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA Sec 13, T26S, R29E	12. COUNTY OR PARISH EDDY	13. STATE NM
14. PERMIT NO.	15. ELEVATIONS (Show whether DF, RT, GR, etc.) 3008' GL											

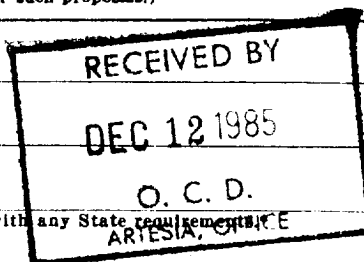

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON*

CHANGE PLANS

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other) Test BOP & Run 8-5/8" csg

REPAIRING WELL

ALTERING CASING

ABANDONMENT*

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

12/04/85 - Test 13-3/8" casing & BOP to 1000 PSI for 30 mins, OK

12/10/85 - Drilled to 3150' w/ 12-1/4 Bit, ran 3150' of 8-5/8" 24# and 32# J-55 casing, cement w/ 1370 sks class C 2% CC, Circulate 375 sks to surface, WOC and nipple up.

ACCEPTED FOR RECORD

DEC 12 1985

CARLSBAD, NEW MEXICO

I hereby certify that the foregoing is true and correct

SIGNED

T L Pilley

TITLE Secretary

DATE 12/10/85

(This space for Federal or State office use)

APPROVED BY

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:

*See Instructions on Reverse Side