

YATES PETROLEUM CORPORATION  
Adeline ALN Federal #15  
Section 6-T24S-R31E  
Eddy County, New Mexico

SUNDRY NOTICE CONTINUED:

5-1/2" 17# J-55 LT&C casing from 7550-8200'

TO:

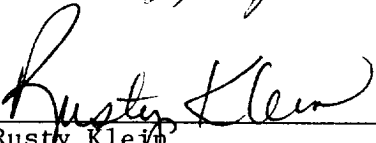
5-1/2" 17# J-55 LT&C casing from 0-100'

5-1/2" 15.5# J-55 LT&C casing from 100-5800'\*

5-1/2" 17# S-95 LT&C casing from 5800-8200'

\*The S-95 casing is used yellow band casing that has been 3rd party inspected

4. BOP requirements: The special stipulations state that the BOP should consist of a kelly cock, stabbing valve, annular preventor and two ram preventors before drilling below the 13-3/8" casing. Cory Frederick, Drilling Engineering Tech for Yates Petroleum Corporation, received verbal permission from Pete Chester w/BLM-Roswell to use a flow nipple and diverter *on 13 3/8", regular BOPE on 8 5/8".*

  
\_\_\_\_\_  
Rusty Klein  
Operations Technician  
May 6, 2000

