


CONDITION IV-B-5000 PSI WP



MATERIAL LIST - CONDITION IV - B

- | | |
|----------------------------|--|
| A | Texas Wellhead |
| B | 5000# W.P. drilling spool with a minimum 2" flanged outlet for kill line and 3" minimum flanged outlet for choke line. |
| C | 5000# W.P. Dual ram type preventer, hydraulic operated with 1" steel, 5000# W.P. control lines. |
| D | 5000# W.P. Annular preventer, hydraulic operated with 1" steel, 3000# W.P. control lines. |
| E | Rotating Head with fill up outlet and extended Bleece line. |
| 1,2,4,5,
8,10,11,
12 | 2" minimum 5000# W.P. flanged full opening steel gate valve, or Halliburton Lo Torc Plug valve. |
| 3 | 2" minimum 5000# W.P. back pressure valve. |
| 6,9 | 3" minimum 5000# W.P. flanged full opening steel gate valve, or Halliburton Lo Torc Plug valve. |
| 7 | 3" minimum 5000# W.P. flanged hydraulic valve |
| 15 | 3" minimum Schedule 160, Grade B, seamless line pipe |
| 16 | 2" minimum x 3" 5000# W.P. flanged cross |
| 13,14 | 2" minimum 5000# W.P. adjustable chokes with carbide trim. |
| 17 | Cameron Mud Gauge or equivalent (location in choke line optional). |
| 18 | 6" minimum 1000# hydraulic flanged valve. |
| 24 | 8" minimum steel flow line. |
| 25 | 2" minimum 1000# W.P. flanged or threaded fill opening steel gate valve, or Halliburton Lo Torc Plug valve. |




EXHIBIT F-1

- 23 Cameron Mud Gauge or equivalent (location in chase line
optional)
- 24 When required - 10" steel flow line
- 25 2" minimum 1000's W.P. flanged or threaded full opening
steel gate valve or Mallisburton Le Tort plug valve



EXHIBIT G-1

6 1/8" Hole
DRILLING CONTROL
CONDITION V-B - 10,000 PSI WP

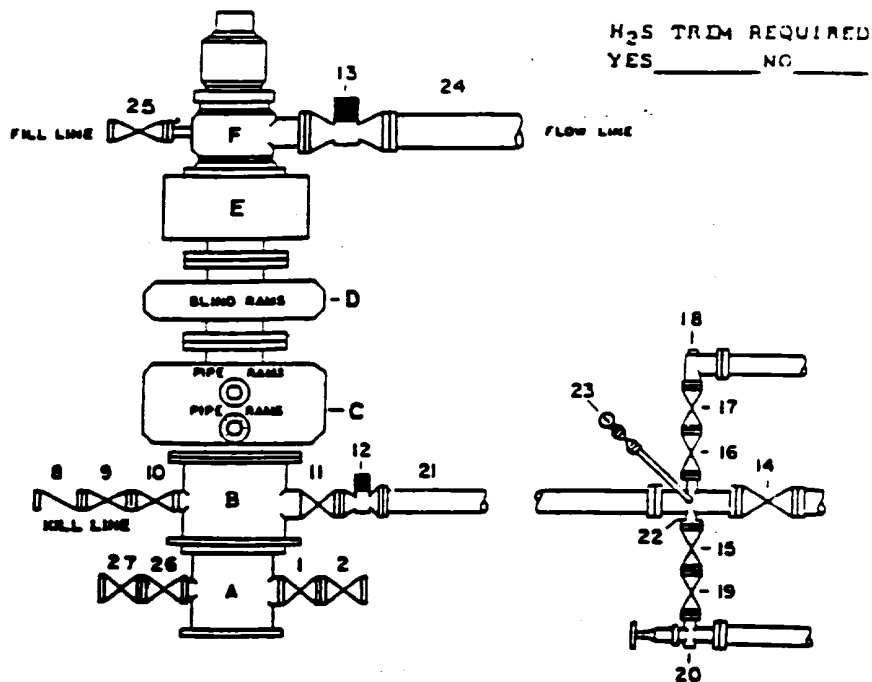

DRILLING CONTROL

MATERIAL LIST - CONDITION V-B

- | | |
|----------------------------|--|
| A | Tomco Wellhead |
| B | 10,000 W.P. Drilling Spool with a minimum 2" flanged outlet for kill line and 4" minimum flanged outlet for choke line |
| C | 10,000 W.P. Dual Variable Ram Type preventer, hydraulic operated with 1" steel, 5000 W.P. control line |
| D | 10,000 W.P. Single Ram Type preventer, hydraulic operated with 1" steel, 5000 W.P. control line |
| E | 10,000 W.P. Annular preventer, hydraulic operated with 1" steel, 5000 W.P. control line |
| F | When Required - Rotating Head with fill up outlet and extended choke line |
| 1,2,9,10,15,16,17,19,26,27 | 2" minimum 10,000 W.P. flanged full opening steel gate valve, or Halliburton Le Torc Plug valve |
| 8 | 2" minimum 10,000 W.P. back pressure valve |
| 11,14 | 4" minimum 10,000 W.P. flanged full opening steel gate valve |
| 13 | 4" minimum 10,000 W.P. flanged full opening hydraulic valve |
| 13 | When Required - 10" minimum 1000 W.P. flanged full opening hydraulic valve |
| 21 | 4" minimum 10,000 W.P. 4130 mechanical tubing with flanged ends, or equivalent |
| 22 | 2" minimum X 4" minimum 10,000 W.P. flanged cross |
| 18 | 2" minimum 10,000 W.P. automatic choke |
| 20 | 2" minimum 10,000 W.P. adjustable choke equipped with carbide tip |
| 23 | Cameron Mud Gauge or equivalent (location in choke line optional) |
| 24 | When Required - 10" steel flow line |
| 25 | 2" minimum 3000 W.P. flanged or threaded full opening steel gate valve or Halliburton Le Torc plug valve |



TEXACO, INC.
 MIDLAND DIVISION
 MIDLAND, TEXAS



SCALE	DATE	EST NO	DRG NO
DRAWN BY			
CHECKED BY			
APPROVED BY			

EXHIBIT G-1