

RECEIVED BY  
Dec. 1973

MAR 18 1985

O. C. D.

ARTESIA, OFFICE

N. H. CARLSBAD

Drawer DD

Artesia, NM 88210

Form Approved.  
Budget Bureau No. 42-R1424

UNITED STATES

DEPARTMENT OF THE INTERIOR

GEOLOGICAL SURVEY

### SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ gas ☒ other ☐

2. NAME OF OPERATOR

The Superior Oil Company

3. ADDRESS OF OPERATOR

P.O. Box 3901, Midland, TX 79702

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)

AT SURFACE: 1980' FSL, 1980' FWL of Sec. 1

AT TOP PROD. INTERVAL:

AT TOTAL DEPTH: Straight hole

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐

FRACTURE TREAT ☐

SHOOT OR ACIDIZE ☐

REPAIR WELL ☐

PULL OR ALTER CASING ☐

MULTIPLE COMPLETE ☐

CHANGE ZONES ☐

ABANDON\* ☐

(other)

SUBSEQUENT REPORT OF:

☐

☐

☐

☐

☐

☐

☐

☒

5. LEASE

NM-29691

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Soto Federal Com.

9. WELL NO.

2

10. FIELD OR WILDCAT NAME

Undesignated Sand Run Marrow

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

Section 1, T24S, R31E

12. COUNTY OR PARISH 13. STATE

Eddy

NM

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)

3532 GR.

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Commenced plugging operations 12-27-83.

1. Set CIBP @ 14,045' & capped with 25 sks class H cmt.

2. Displaced hole w/9.5# gel mud.

3. Pmpd 25 sks cmt plug 11, 986-11,922, Class H

4. Pmpd 50 sks cmt plug 8,000-7,900', Class H.

5. Pmpd 120 sks cmt plug 4,600-4,300', Class H.

6. Pmpd 120 sks cmt plug 1,000-700', Class H.

7. Pmpd 20 sks cmt plug 50'- surface.

8. Cut off well head. Welded on steel plate & installed dry hole marker. Clean location.

Well plugged & abandoned 1-4-84.

- Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED

G. E. Tate

TITLE Division Opr. Supt. DATE 3-23-84

(This space for Federal or State office use)



APPROVED BY

Don Work

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:

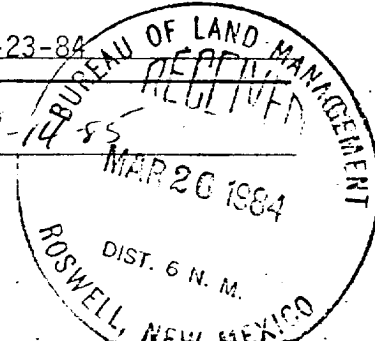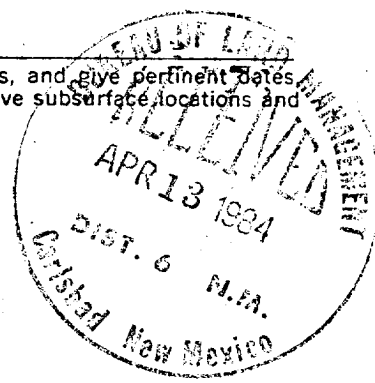

Post FD-2  
4-20-84  
P4A