

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals

**SUBMIT IN TRIPLICATE**

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

YATES PETROLEUM CORPORATION

(505) 748-1471

3. Address and Telephone No.

105 South 4th St., Artesia, NM 88210

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1980' FNL & 1980' FEL of Section 15-T26S-R31E (Unit G, SWNE)

5. Lease Designation and Serial No.

NM-89058

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Opera AQG Federal #1

9. API Well No.

30-015-29435

10. Field and Pool, or Exploratory Area

Wildcat Ross Ranch

11. County or Parish, State

Eddy Co., NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

☐ Notice of Intent

☒ Subsequent Report

☐ Final Abandonment Notice

TYPE OF ACTION

☐ Abandonment

☐ Recompletion

☐ Plugging Back

☐ Casing Repair

☐ Altering Casing

☒ Other Intermediate casing  
and cement

☐ Change of Plans

☐ New Construction

☐ Non-Routine Fracturing

☐ Water Shut-Off


☐ Conversion to Injection

☐ Dispose Water

(Note: Report results of multiple completion on Well  
Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

TD 3944'. Reached TD at 7:00 PM 6-7-97. Ran 88 joints of 8-5/8" 32# J-55 (3947.76') of casing set at 3944'. Float shoe set at 3944'. Float collar set at 3897'. Cemented with 1150 sacks Howco Lite Premium Plus, 1/4#/sack flocele, 5#/sack gilsonite and 5#/sack salt (yield 2.07, weight 12.48). Tailed in with 250 sacks Howco Premium Plus with 2% CaCl2 (yield 1.34, weight 14.8). PD 10:30 AM 6-8-97. Bumped plug to 500 psi, OK. Circulated 237 sacks. WOC. Nippled up and tested to 5000 psi for 30 minutes, OK. Drilled out at 6:15 AM 6-9-97. WOC 19 hours and 45 minutes. Reduced hole to 7-7/8". Resumed drilling.

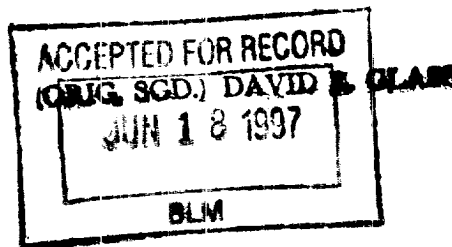

RECEIVED  
1997 JUN 17 A 9:25  
BUREAU OF LAND MANAGEMENT  
NOSSEL OFFICE

14. I hereby certify that the foregoing is true and correct

Signed Rusty Klein Title Operations Technician Date June 14, 1997

(This space for Federal or State office use)

Approved by \_\_\_\_\_ Title \_\_\_\_\_ Date \_\_\_\_\_  
Conditions of approval, if any: