


DEVON ENERGY CORPORATION WELLBORE SCHEMATIC

WELL NAME: COTTONWOOD "36" STATE #1				FIELD: COTTONWOOD DRAW		
LOCATION: 1980' FSL & 1980' FWL, SEC. 36-T25S-R26E				COUNTY: EDDY		STATE: NM
ELEVATION: GL=3322'; KB=3334'				SPUD DATE: 05/18/97		COMP DATE: 08/20/97
API#: 30-015-29560		PREPARED BY: C.H. CARLETON			DATE: 10/15/02	
TUBULARS	DEPTH	SIZE	WEIGHT	GRADE	THREAD	HOLE SIZE
CASING:	0' - 353'	13 3/8"	48#			17 1/2"
CASING:	0' - 1860'	8 5/8"	32#			12 1/4"
CASING:	3014' - 5850'	5 1/2"	17#			7 7/8"
TUBING:						
TUBING:						



CURRENT

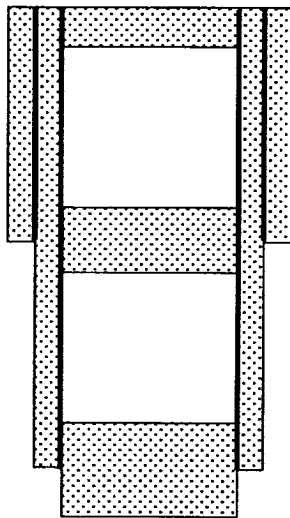

PROPOSED

OPERATOR: DEVON ENERGY PRODUCTION COMPANY, L.P.

CEMENT PLUG: 0' - 60' WITH 15 SXS


CEMENT PLUG: 244' - 410' WITH 50 SXS

13 3/8" CASING @ 353' W/390 SXS. TOC @ SURFACE.

NOTE: 9.5PPG MUD SPOTTED BETWEEN CEMENT PLUGS

CEMENT PLUG: 1664' - 2020' WITH 105 SXS

8 5/8" CASING @ 1860' W/1000 SXS. TOC @ SURFACE.

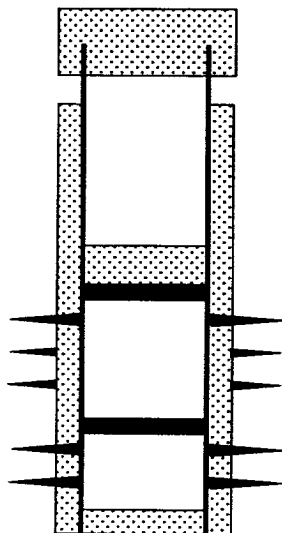

CEMENT PLUG: 2924' - 3060' WITH 40 SXS

CUT OFF 5 1/2" CASING @ 3014'

CIBP @ 5304' AND CAPPED WITH 25 SXS CEMENT (TOC @ 5053')

U. BRUSHY CANYON PERFORATIONS: 5386' - 5396' (OA)

BRUSHY CANYON PERFORATIONS: 5480' - 5484' (SQUEEZED OFF)

L. BRUSHY CANYON PERFORATIONS: 5539' - 5569' (SQUEEZED OFF)

CIBP @ 5680'

AVALON PERFORATIONS: 5720' - 5752' (OA)

5 1/2" CASING @ 5850' W/650 SXS. TOC @ 3370'(CALCULATED)

TD @ 5850'

NOTE: FOR CALCULATED CEMENT TOPS A YIELD OF 1.32 CU FT/SX AND 50% FILLUP WERE ASSUMED.